

## Quadrature Speed and Direction Sensors SNG-Q Series

**32304260**  
Issue B

Datasheet



### DESCRIPTION

Honeywell's SNG-Q Series Quadrature Speed and Direction Sensors are designed to provide both speed and direction information. Speed information is provided from digital square wave outputs; direction is provided using a quadrature output with signals 90° phase shifted from each other. With the quadrature output, target direction is determined by output lead/lag phase shifting.

The SNG-Q Series are designed and manufactured using a platform-based approach that enables cost-competitiveness and mechanical and electrical configurability for customers. The Series are designed for applications where enhanced accuracy is required to detect small target features. This accuracy is enabled by dual differential Hall-effect sensor IC technology. The SNG-Q Series provide a wide operating temperature range, robust electrical noise immunity and industry leading environmental sealing capability. This product includes an O-ring seal for pressure applications, and a fixed mounting flange for simple installation using one fastener.

### FEATURES

- Wide operating temperature range: -40 °C to 150 °C [-40 °F to 302 °F]
- Environmental sealing: Moisture ingress protection rated to IP69K
- Robust electrical noise immunity: Electrical noise radiated immunity (EMC) rated to 100 V/m
- High frequency switching capability: 3 Hz to 20 kHz
- Direction information: From phase-shifted dual output signals
- O-ring seal: Enables environmental sealing to mounting surface
- Supply voltage range: 4.5 V to 26 V

### POTENTIAL APPLICATIONS

#### Industrial

- AC induction motors in material handling, agriculture, and construction machines: May be used to help control power delivered by the ac induction motor
- Hydraulic pump motors in material handling, agriculture, and construction machines: May be used to help control power delivered by the hydraulic pump motor
- Escalators and elevators: May be used to help control speed and position

#### Transportation

- Hybrid electric transmissions in heavy duty trucks, buses, agriculture and construction machines: May be used to help control power regulation of the hybrid system
- Wheel speed detection in material handling, agriculture, and construction machines: May be used to detect the speed and direction of the wheels, which translates to the speed and direction of the machine
- Hybrid engines in heavy duty trucks, buses, agriculture and construction machines: May be used to help control power regulation of the hybrid system

Not recommended for Aerospace or Defense applications.

### PORTFOLIO

The SNG-Q Series joins the 1GT Series, [LCZ Series](#), [ZH10 Series](#), [584XX Series](#), [SNDH-T Series](#), and the [SNDH-H Series](#).

# Quadrature Speed and Direction Sensors, SNG-Q Series

**Table 1. Order Guide**

Catalog Listing	Availability	Description
SNG-QPLA-000	Now	SNG-Q Series, 4-wire quadrature speed and direction sensor, plastic housing, 500 mm [19.7 in] cable with leads, right angle exit, 35 mm [1.38 in] housing length
SNG-QPCA-001	Now	SNG-Q Series, 4-wire quadrature speed and direction sensor, plastic housing, 1,25 m [49.2 in] cable with Deutsch DTM04-4P connector, right angle exit, 35 mm [1.38 in] housing length
SNG-QPRA-000	Now	SNG-Q Series, 4-wire quadrature speed and direction sensor, plastic housing, integral Amp Superseal 1.5 connector, right angle exit, 35 mm [1.38 in] housing length
SNG-QPMB-000	Coming soon	SNG-Q Series, 4-wire quadrature speed and direction sensor, plastic housing, 500 mm [19.7 in] cable with leads, straight exit, 45 mm [1.77 in] housing length





**Figure 1. Nomenclature Guide (All options available now, unless otherwise noted.)**

For example, **SNG-QPLA-000** defines an SNG-Q Series quadrature speed and direction sensor, 500 mm [19.7 in] cable with leads, right angle exit, 35 mm [1.38 in] housing length.

<b>SNG-Q</b> Series	<b>P</b> Housing Material <sup>1</sup>	<b>L</b> Connection Type <sup>2</sup>	<b>A</b> Housing Length	<b>000</b> For Internal Use Only
4-wire quadrature speed and direction sensor	<b>P</b> Plastic	<b>S</b> Integral Amp Superseal 1.5 connector, straight exit <sup>3</sup>	<b>A</b> 35 mm [1.38 in]	
		<b>R</b> Integral Amp Superseal 1.5 connector, right angle exit		
		<b>L</b> 500 mm [19.7 in] cable with leads, right angle exit	<b>B</b> 45 mm [1.77 in] (coming soon)	
		<b>M</b> 500 mm [19.7 in] cable with leads, straight exit (coming soon)		
		<b>C</b> 1,25 m [49.2 in] cable with Deutsch DTM04-MP connector, right angle exit		
<b>D</b> 1,25 m [49.2 in] cable with Deutsch DTM04-MP connector, straight exit (coming soon) <sup>3</sup>				

<sup>1</sup>Contact Honeywell for other Housing Material options.  
<sup>2</sup>Other cable lengths available upon request.  
<sup>3</sup>Contact Honeywell.

**Table 2. Electrical Specifications**

	Parameter		Comment
	Available Now	Coming Soon	
	 SNG-QPLA-000  SNG-QPCA-001  SNG-QPRA-000	 SNG-QPMB-000	
Supply voltage	4.5 V to 26 V	4.5 V to 26 V	—
Output signal: type	square wave	square wave	Two channel, phase shifted by 90° either channel, may lead or lag. Dependent on target geometry and sensor-to-target orientation; see Figures 2, 3, 4, 5 for recommended orientation.
duty cycle <sup>1</sup>	50% ±10%	50% ±10%	
phase shift	90° ±45°	90° ±45°	
high	≥Vs - 0.5 V	≥Vs - 0.5 V	—
low	≤0.5 V (SNG-QPLA/QPCA), ≤1.75 V (SNG-QPRA)	≤0.5 V	—
load current	40 mA max.	40 mA max.	Each output at all conditions 1 kOhm pull-up resistor, dependent on load resistor. 1 kOhm pull-up resistor, dependent on load resistor. Frequencies >10 kHz may be dependent on target geometry and air gap.
rise time	10 μs max.	10 μs max.	
fall time	5 μs max.	5 μs max.	
frequency	3 Hz to 20 kHz	3 Hz to 20 kHz	
Short circuit protection	50 mA max.	50 mA max.	—
Supply current	12 mA normal, 18 mA max.	12 mA normal, 18 mA max.	all conditions
Reverse voltage	-26 V max.	-26 V max.	10 min duration

<sup>1</sup>Duty cycle = Time high/time total.

# Quadrature Speed and Direction Sensors, SNG-Q Series

**Table 3. Environmental Specifications**

Characteristic	Condition	Parameter	
		SNG-QPLA-000 SNG-QPCA-001 SNG-QPRA-000 (Available Now)	SNG-QPMB-000 (Coming Soon)
EMI: radiated immunity bulk current injection ESD	ISO 11452-2, 400 MHz to 1 GHz ISO 11452-4, 1 MHz to 400 MHz ISO 10605, Section 9 conforms to CE Mark standards EN60947-5-2:2007 and EN 60947-5-2/A1:2012	100 V/m 100 mA ±8 kV contact, ±15 kV air	100 V/m 100 mA ±8 kV contact, ±15 kV air
Operating temperature	—	-40 °C to 150 °C [-40 °F to 302 °F]	-40 °C to 150 °C [-40 °F to 302 °F]
Thermal shock, air to air	-40 °C to 150 °C [-40 °F to 302 °F], 60 min. soak. <3 s transfer	500 cycles	500 cycles
Humidity	95% humidity at 38 °C [100 °F]	240 hr	240 hr
Salt fog	5% salt solution by mass at 35 °C [95 °F]	96 hr	96 hr
Thermal saline dunk	100 °C to 25 °C [212 °F to 77 °F] air to liquid, 5% saline	10 cycles	10 cycles
High temperature exposure with power	150 °C [302 °F], 13.5 Vdc, 1 kOhm load	500 hr	500 hr
Vibration	3 perpendicular axes, 48 hr per axis	29.28 GMS, 50 Hz to 2000 Hz MIL-STD-202-214	29.28 GMS, 50 Hz to 2000 Hz MIL-STD-202-214
Sensor degree of protection	—	IP69K	IP69K
Resistance to fluids	—	general under-the-hood automotive fluids	general under-the-hood automotive fluids

**Table 4. Mechanical Specifications**

Characteristic	Parameter	
	SNG-QPLA-000 SNG-QPCA-001 SNG-QPRA-001 (Available Now)	SNG-QPMB-000 (Coming Soon)
Sensing air gap	0,0 mm to 2,0 mm [0.0 in to 0.08 in]	0,0 mm to 2,0 mm [0.0 in to 0.08 in]
Target: width <sup>1</sup> slot width <sup>2</sup> tooth width <sup>2</sup> tooth height <sup>3</sup>	>5,0 mm [0.20 in] recommended; 12,7 mm [0.5 in] typ. 2,0 mm [0.08 in] min. 2,0 mm [0.08 in] min. >3,0 mm [0.12 in] recommended; 5,0 mm [0.20 in] typ.	>5,0 mm [0.20 in] recommended; 12,7 mm [0.5 in] typ. 2,0 mm [0.08 in] min. 2,0 mm [0.08 in] min. >3,0 mm [0.12 in] recommended; 5,0 mm [0.20 in] typ.
Materials: housing bushing O-ring cable <sup>5</sup>	PBT brass fluorocarbon with PTFE coating, Ø11,8 mm [Ø0.47 in] OD x Ø1,80 mm [Ø0.07 in] CS EVA, four conductor, 36 AWG, 28 strand, Ø5,2 mm [Ø0.20 in] jacket	PBT brass fluorocarbon with PTFE coating, ø11,8 mm [Ø0.47 in] OD x Ø1,80 mm [Ø0.07 in] CS EVA, four conductor, 36 AWG, 28 strand, Ø5,2 mm [Ø0.20 in] jacket
Mounting: bore size <sup>4</sup> torque	Ø15,15 mm to Ø15,40 mm [Ø0.60 in to Ø0.61 in] 10 N m [88.5 in-lb] max. with M6 X 1.0 bolt	Ø15,15 mm to Ø15,40 mm [Ø0.60 in to Ø0.61 in] 10 N m [88.5 in-lb] max. with M6 X 1.0 bolt

<sup>1</sup>Narrower targets may limit axial offsets.

<sup>2</sup>Other geometry may be suitable.

<sup>3</sup>Shorter tooth heights may limit maximum air gap performance.

<sup>4</sup>Application dependent.

<sup>5</sup>Applies to SNG-QPLA-001, SNG-QPCA-001, SNG-QPMB-001.

# Quadrature Speed and Direction Sensors, SNG-Q Series

Figure 1. Sensor Output (All catalog listings)




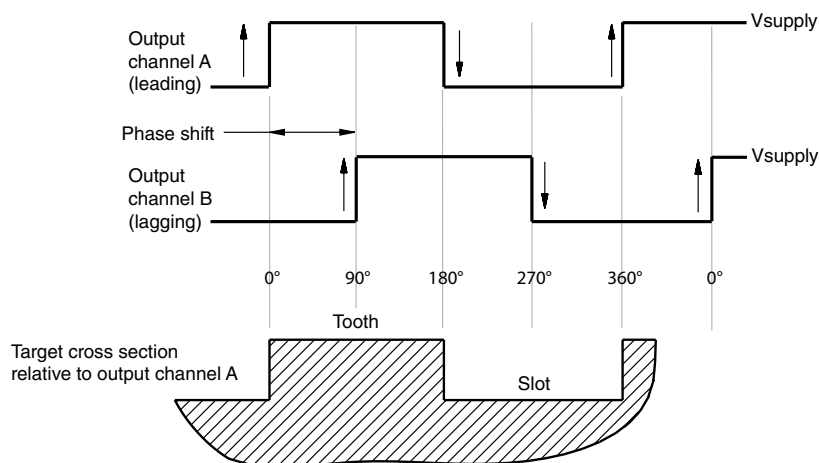


Figure 2. SNG-QPLA-000 Mounting Dimensions (For reference only: mm/[in.]) (Available now.)

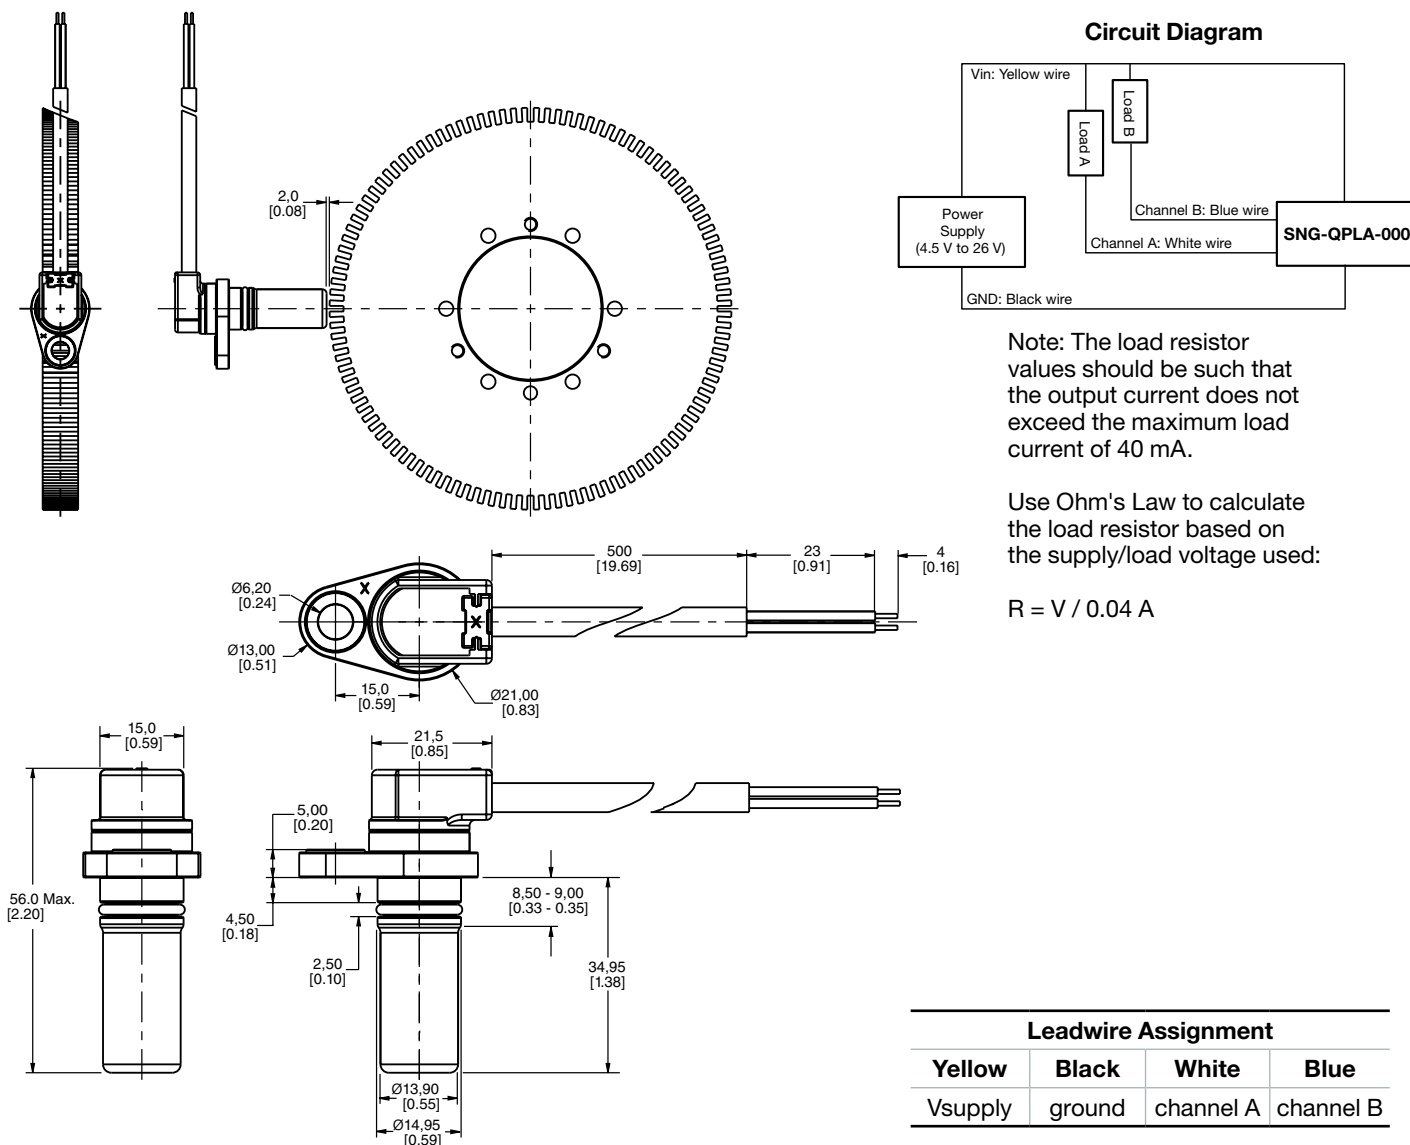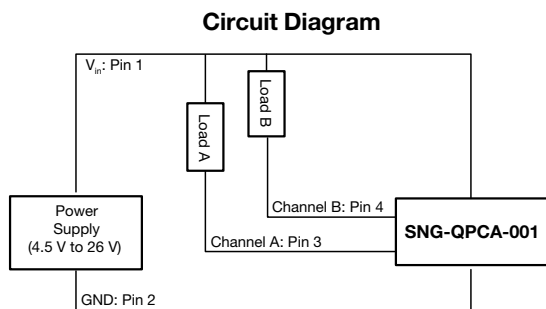

# Quadrature Speed and Direction Sensors, SNG-Q Series



Figure 3. SNG-QPCA-001 Mounting Dimensions (For reference only: mm/[in.]) (Available now.)

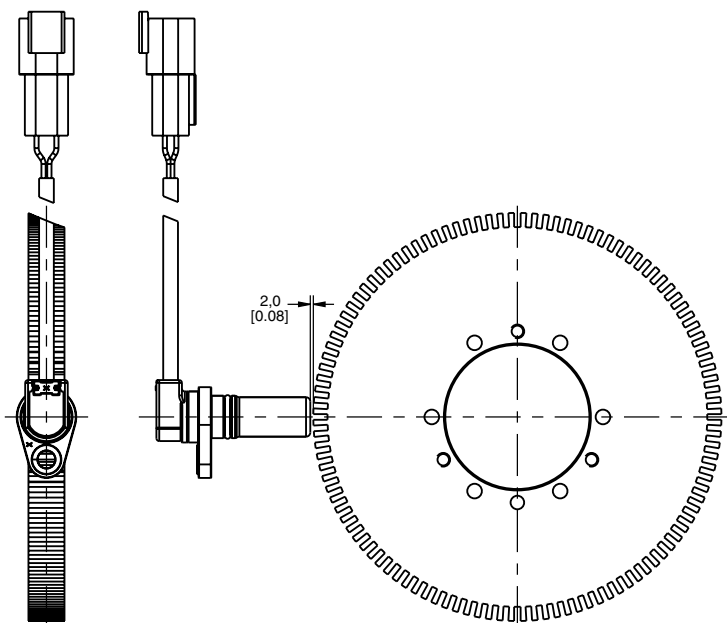

Note: The load resistor values should be such that the output current does not exceed the maximum load current of 40 mA.

Use Ohm's Law to calculate the load resistor based on the supply/load voltage used:

$$R = V / 0.04 \text{ A}$$





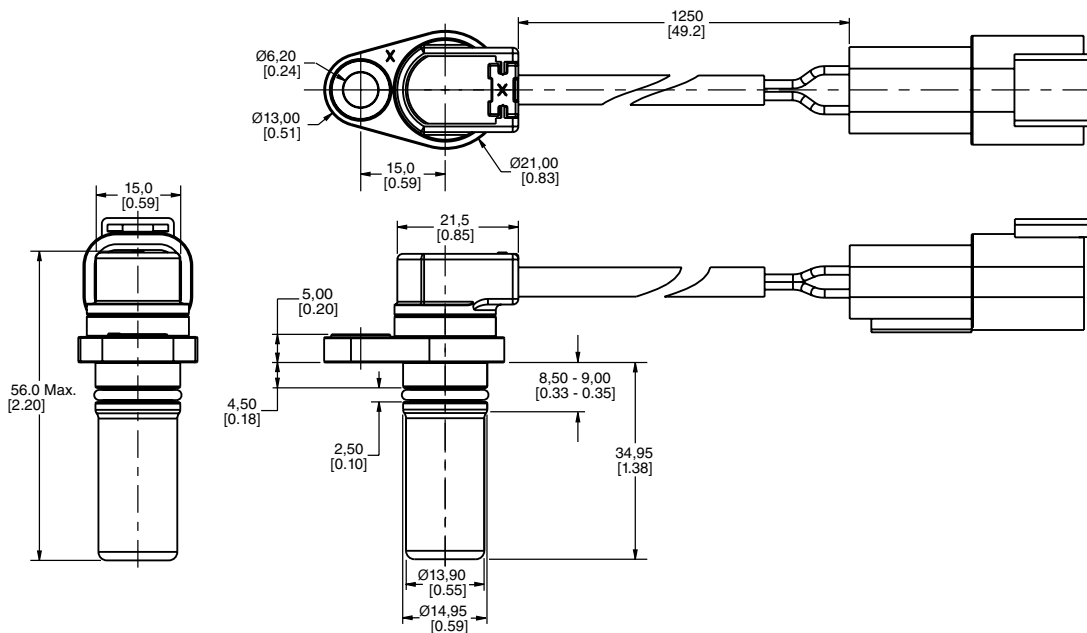


**Deutsch DTM04-4P Pinout  
(mating connector Deutsch DTM06-4S)**


1	2	3	4
Vin	ground	channel A	channel B

# Quadrature Speed and Direction Sensors, SNG-Q Series

Figure 4. SNG-QPRA-000 Mounting Dimensions (For reference only: mm/[in].) (Available now.)

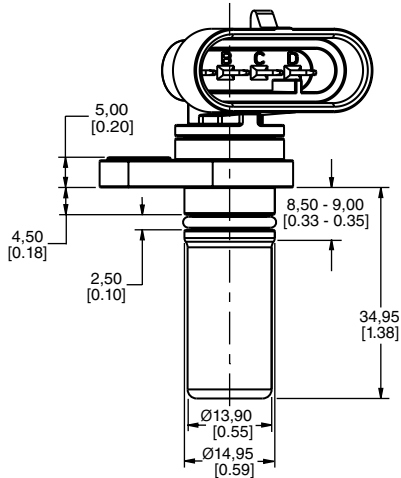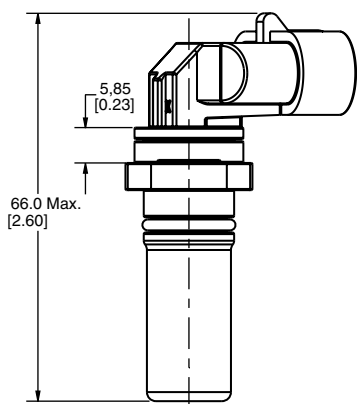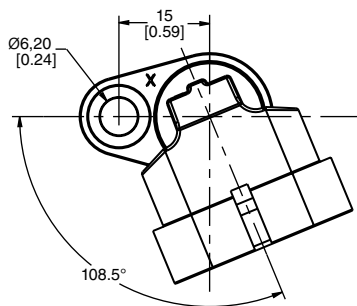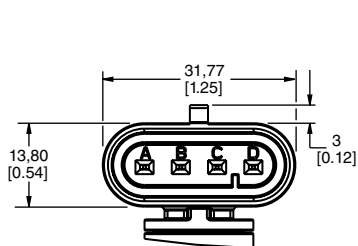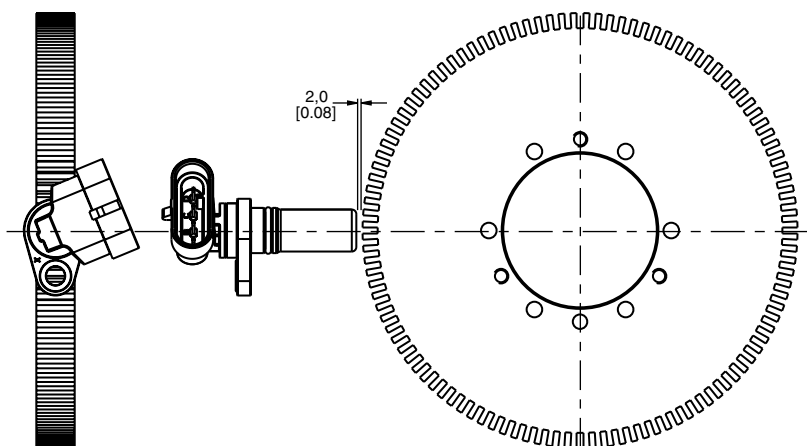

## Circuit Diagram

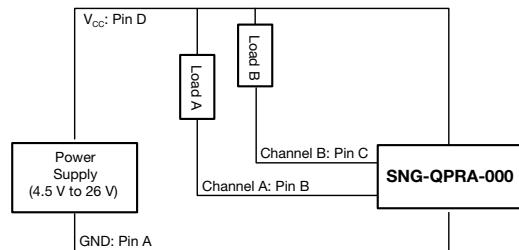

Note: The load resistor values should be such that the output current does not exceed the maximum load current of 40 mA.

Use Ohm's Law to calculate the load resistor based on the supply/load voltage used:




$$R = V / 0.04 \text{ A}$$

### Amp Superseal 1.5 Connector Pinout (mating connector 282088)


A	B	C	D
ground	channel A	channel B	V <sub>cc</sub>

# Quadrature Speed and Direction Sensors, SNG-Q Series

Figure 5. SNG-QPMB-000 Mounting Dimensions (For reference only: mm/[in].) (Coming soon.)

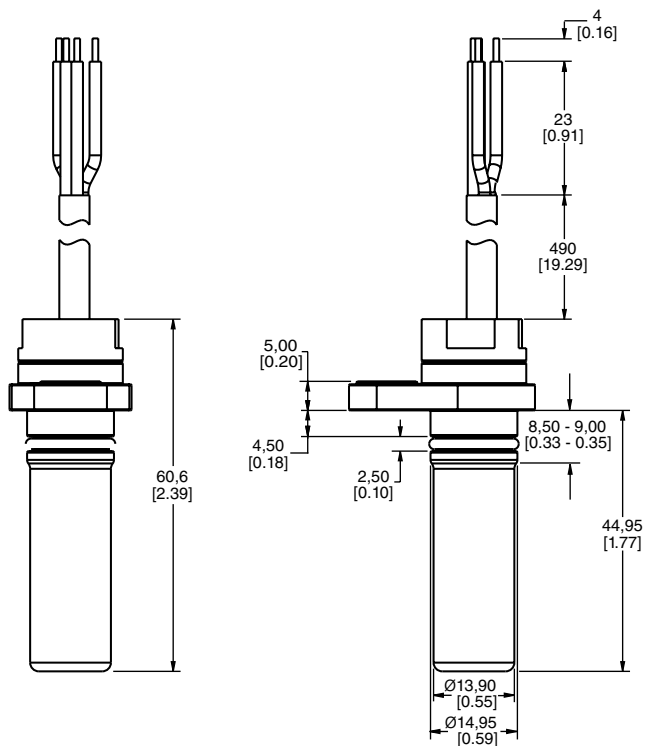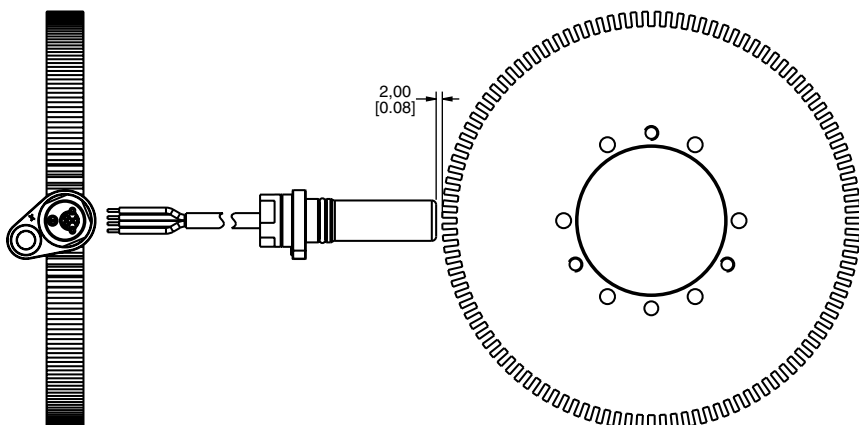

## Circuit Diagram

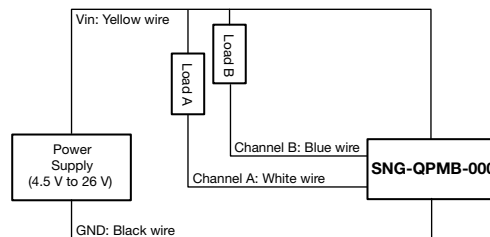

Note: The load resistor values should be such that the output current does not exceed the maximum load current of 40 mA.

Use Ohm's Law to calculate the load resistor based on the supply/load voltage used:

$$R = V / 0.04 \text{ A}$$

## Leadwire Assignment

Yellow	Black	White	Blue
Vsupply	ground	channel A	channel B

## ADDITIONAL INFORMATION

The following associated literature is available on the Honeywell web site at [sensing.honeywell.com](http://sensing.honeywell.com):

- Product Range Guide
- Product Line Guide
- Product Installation Instructions
- Technical Information

For SNG-QPLA-000, SNG-QPCA-001, SNG-QPRA-000  
(Available now.)

**⚠ WARNING**  
**PERSONAL INJURY**

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

**⚠ WARNING**  
**MISUSE OF DOCUMENTATION**

- The information presented in this datasheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

**WARRANTY/REMEDY**

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective.

**The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell website, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

**Find out more**

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office.

To learn more about Honeywell Sensing and Productivity Solutions' products, call **+1-815-235-6847** or **1-800-537-6945**, visit **sensing.honeywell.com**, or e-mail inquiries to **info.sc@honeywell.com**

For SNG-QPMB-000 (Coming soon.)

**NOTICE**  
**EVALUATION PRODUCTS**

**THESE PRODUCT ARE PROTOTYPE PREPRODUCTION ITEMS THAT HAVE YET TO COMPLETE ALL PHASES OR PRODUCT RELEASE TESTING AND ARE FOR CUSTOMER EVALUATION ONLY.**

**THESE ITEMS ARE SOLD "AS IS" WITHOUT WARRANTY EXPRESS OR IMPLIED, INCLUDING THAT OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.**

**IN NO EVENT WILL HONEYWELL BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL OR DIRECT DAMAGES.**

# Preliminary

This publication does not constitute a contract between Honeywell and its customers. The contents may be changed at any time without notice. It is the customer's responsibility to ensure safe installation and operation of the products. Detailed mounting drawings of all products illustrated are available upon request.

Sensing and Productivity Solutions  
Honeywell  
1985 Douglas Drive North  
Golden Valley, MN 55422  
**honeywell.com**

32304260-B-EN IL50  
January 2016  
© 2016 Honeywell International Inc. All rights reserved.

**Honeywell**



单击下面可查看定价，库存，交付和生命周期等信息

[>>Honeywell\(霍尼韦尔\)](#)