

1.5A 2MHz 5.5V Synchronous Buck Converter

DESCRIPTION

The BL8028 is a high-efficiency, DC to DC step-down switching regulators, capable of delivering up to 1.5A of output current. The device operates from an input voltage range of 2.6V to 5.5V and provides an output voltage from 0.6V to V_{IN} . Working at a fixed frequency of 2MHz allows the use of small external components, such as ceramic input and output caps, as well as small inductors, while still providing low output ripples. This low noise output along with its excellent efficiency achieved by the internal synchronous rectifier, making BL8028 an ideal replacement for large power consuming linear regulators. Internal soft-start control circuitry reduces inrush current. Short-circuit and thermal shutdown protection improves design reliability.

The BL8028 is available in SOT23-5, DFN2x2-6 and DFN1.6x1.6-6 package.


FEATURES

- High efficiency: up to 97%
- Up to 1.5A Max output current
- 2MHz switching frequency
- Low dropout 100% duty operation
- Internal compensation and soft-start
- Current mode control
- Reference 0.6V
- Logic control shutdown ($I_Q < 1\mu A$)
- Thermal shutdown, UVLO
- Available in SOT23-5, DFN2x2-6, DFN1.6x1.6-6


APPLICATIONS

- Cellular phones
- Digital cameras
- MP3 and MP4 players
- Set top boxes
- Wireless and DSL modems
- USB supplied devices in notebooks
- Portable devices

TYPICAL APPLICATION

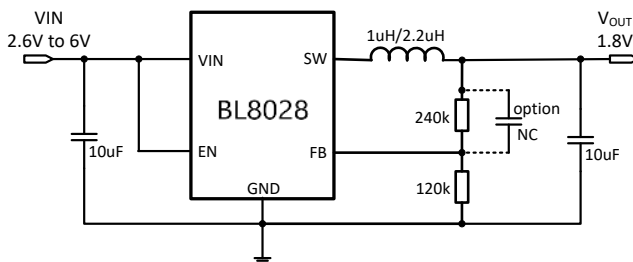


PIN OUT & MARKING

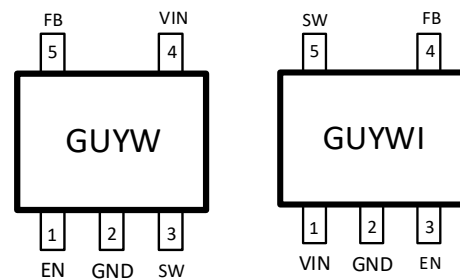

SOT23-5

SOT23-5(B)

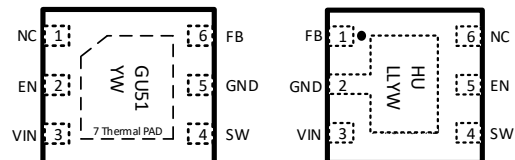

DFN2x2-6

DFN1.6x1.6-6

GU/GU51/HU: Product code

LL: Lot No.

YW: Date code (Year & Week)

ORDERING INFORMATION

Part No.	Package	Tape&Reel
BL8028CB5TR	SOT23-5	3000pcs/reel
BL8028CB5BTR	SOT23-5	3000pcs/reel
BL8028CKCTR	DFN2x2-6	3000pcs/reel
BL8028CKNTR	DFN1.6x1.6-6 ¹	3000pcs/reel
BL8028CKNTR	DFN1.6x1.6-6 ²	5000pcs/reel

Note: 1) The DFN1.6x1.6-6 package is packaged in Suzhou Good-ark Electronics Co., Ltd.

2) The DFN1.6x1.6-6 package is packaged in TRS Microelectronics Co., Ltd.

ABSOLUTE MAXIMUM RATING

Parameter		Value
Max input voltage		8V
Max operating junction temperature(T _J)		125°C
Operating ambient temperature(T _A)		-40°C – 85°C
Maximum power dissipation	SOT23-5	0.6W
	DFN2x2-6	1W
	DFN1.6x1.6-6	0.8W
Package thermal resistance (θ _{JA})	SOT23-5	200°C/W
	DFN2x2-6	80°C/W
	DFN1.6x1.6-6	125°C/W
Package thermal resistance (θ _{JC})	SOT23-5	100°C/W
	DFN2x2-6	18°C/W
	DFN1.6x1.6-6	30°C/W
Storage temperature(T _S)		-40°C - 150°C
Lead temperature & time		260°C, 10S
ESD (HBM)		>2000V

Note: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{IN}=5V, T_A=25°C, unless otherwise specified.)


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{IN}	Input voltage range		2.6		5.5	V
V _{OVP}	Input overvoltage threshold			6.1		V
V _{REF}	Feedback voltage	V _{IN} =5V	0.588	0.6	0.612	V
I _{FBI}	Feedback leakage current			0.1	1	uA
I _Q	Quiescent current	Active, V _{FB} =0.65, No Switching		80		uA
I _{SHUTDOWN}	Shutdown input current	EN=0V			1	uA
LNR	Line regulation	V _{IN} =2.6V to 5.5V		0.1	0.2	%/V
LDR	Load regulation	I _{OUT} =0.01 to 1A		0.1	0.2	%/A
F _{SOC}	Switching frequency			2		MHz
R _{DSON_P}	PMOS R _{DSON}			250	350	mΩ
R _{DSON_N}	NMOS R _{DSON}			150	250	mΩ
V _{UVLO}	Under voltage lockout		1.9	2.1	2.3	V

V _{UVLO_HY}	UVLO hysteresis		100		mV
I _{LIMIT}	Peak current limit		2.3		A
I _{NOLOAD}		V _{IN} =5V, V _{OUT} =3.3V, I _{OUT} =0A	80		uA
I _{SWLK}	SW leakage current	V _{IN} =6V, V _{SW} =0 or 6V, EN=0V		1	uA
I _{ENLK}	EN leakage current			1	uA
T _{SS}	Soft start time		0.3		ms
V _{H_EN}	EN input high voltage	1.2			V
V _{L_EN}	EN input low voltage			0.5	V
T _{SD}	Thermal shutdown temp		160		°C
T _{SH}	Thermal shutdown hysteresis		15		°C


ELECTRICAL PERFORMANCE

Tested under T_A=25°C, unless otherwise specified


Efficiency vs. Output Current (V_{out}=1.2V)

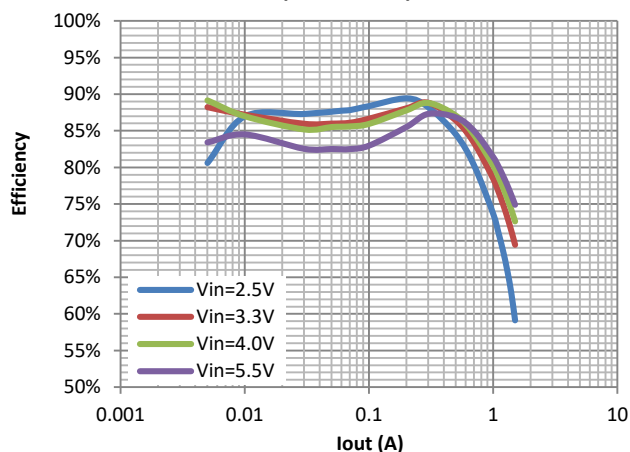


Efficiency vs. Output Current (V_{out}=1.8V)




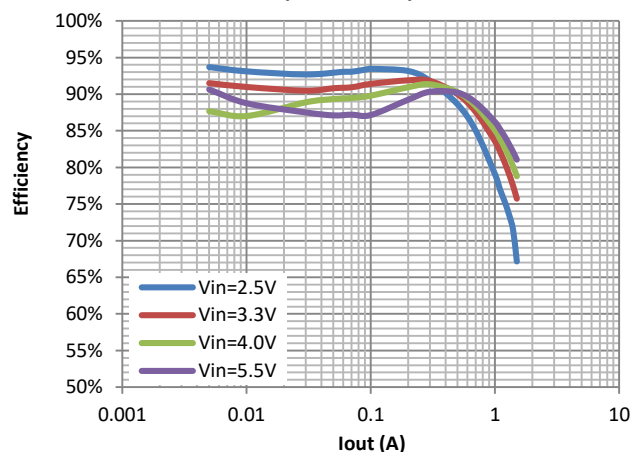


Efficiency vs. Output Current (V_{out}=3.3V)

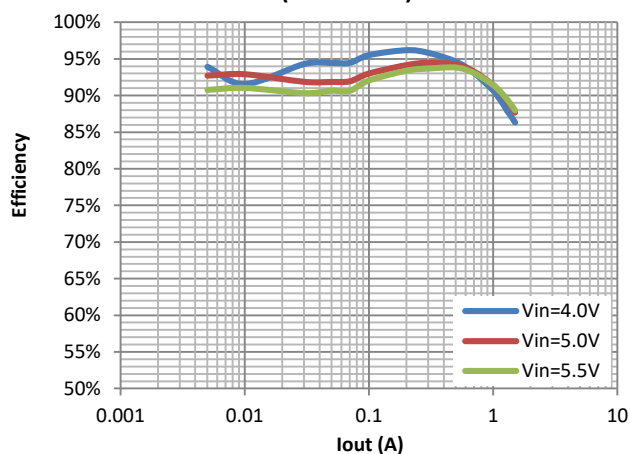

Output Ripple and SW at 1A load V_{in}=5V, V_{out}=1.8V

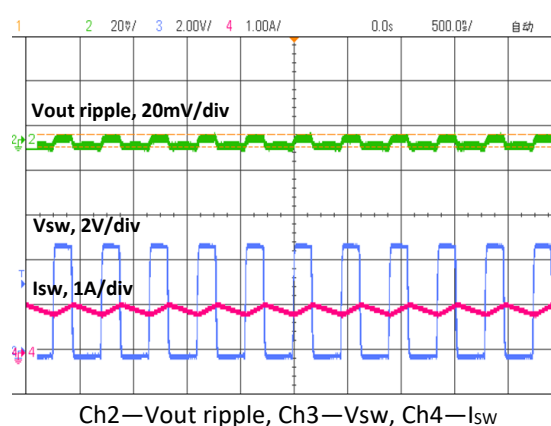

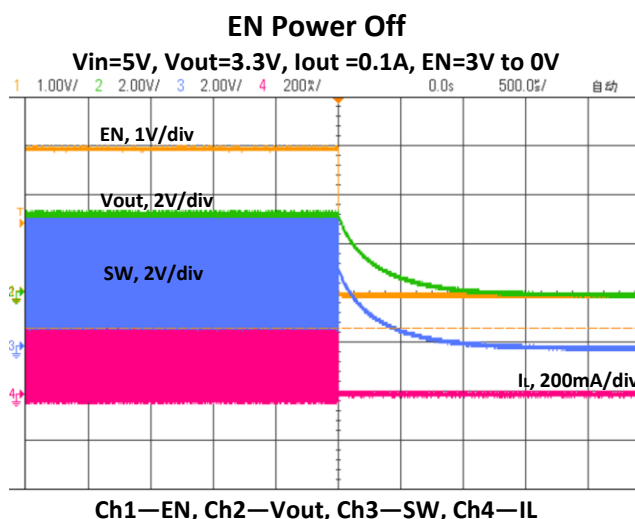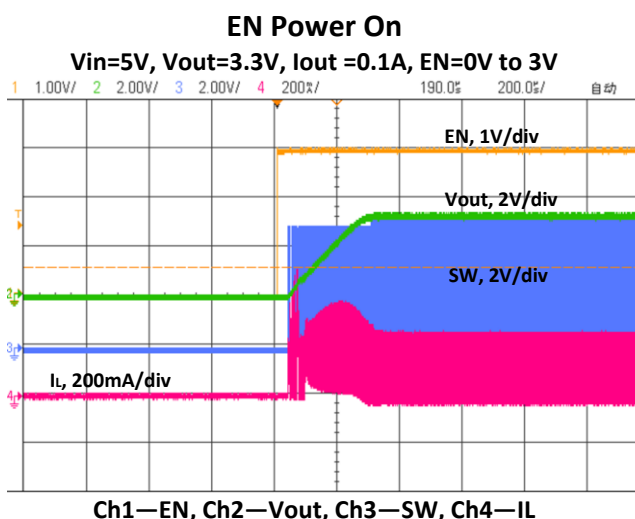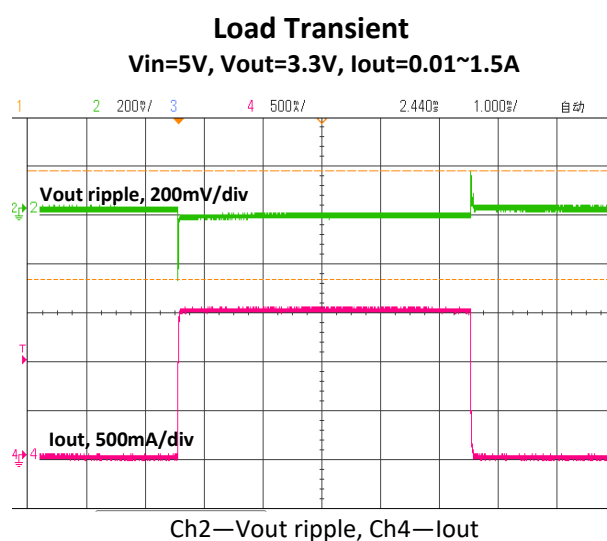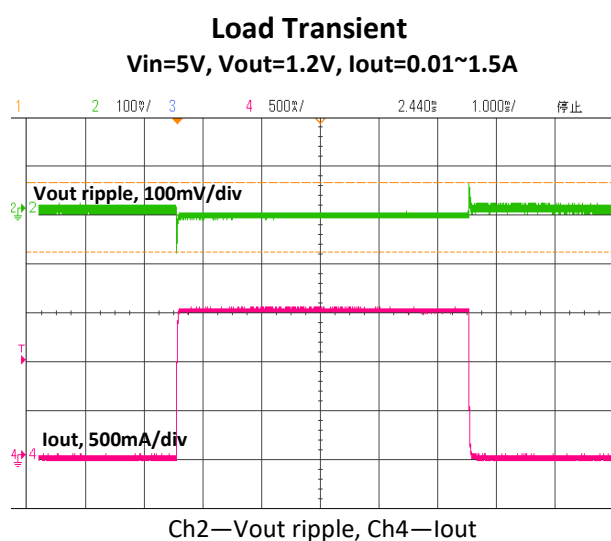


PIN DESCRIPTION

Name	Pin #				Description
	SOT23-5	SOT23-5(B)	DFN2x2-6	DFN1.6x1.6-6	
EN	1	3	2	5	Enable pin for the IC. Drive the pin to high to enable the part, and low to disable.
GND ¹	2	2	5	2	Ground
SW	3	5	4	4	Inductor connection. Connect an inductor between SW and the regulator output.
VIN	4	1	3	3	Supply voltage.
FB	5	4	6	1	Feedback input. Connect an external resistor divider from the output to FB and GND to set the output to a voltage between 0.6V and Vin.
NC	-	-	1	6	No connection.
Thermal PAD	-	-	7	-	Ground

Note: 1) The GND of the DFN1.6x1.6 package is connected to the Thermal PAD.

BLOCK DIAGRAM

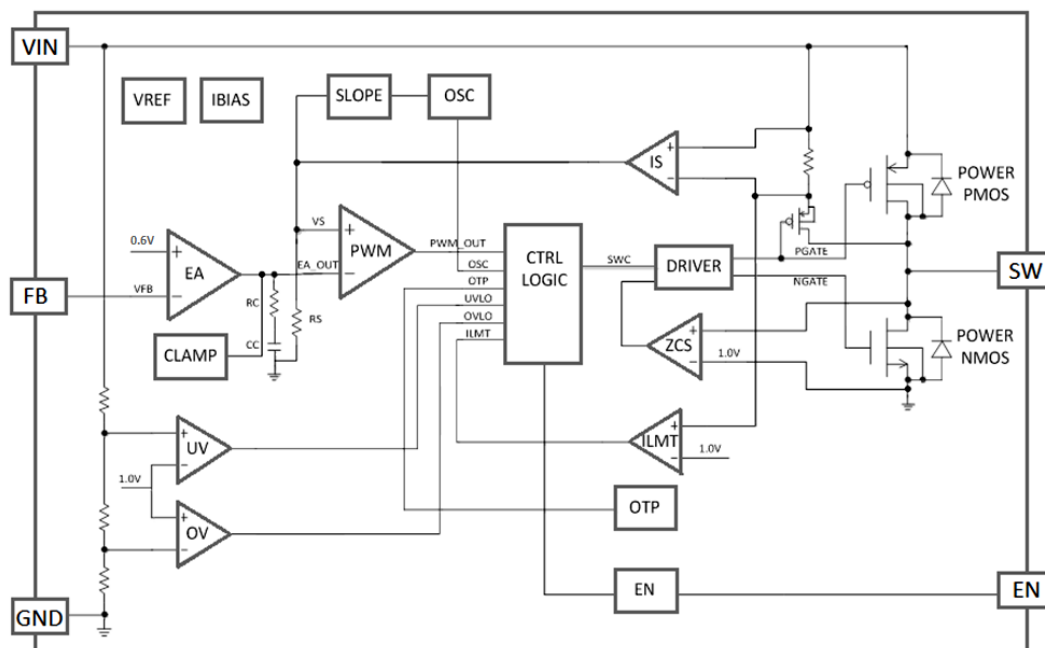

DETAILED DESCRIPTION

The BL8028 high-efficiency switching regulator is a small, simple, DC-to-DC step-down converter capable of delivering up to 1.5A of output current. The device operates in pulse-width modulation (PWM) at 2MHz from a 2.6V to 5.5V input voltage and provides an output voltage from 0.6V to V_{IN} , making the BL8028 ideal for on-board post-regulation applications. An internal synchronous rectifier improves efficiency and eliminates the typical Schottky free-wheeling diode. Using the on resistance of the internal high-side MOSFET to sense switching currents eliminates current-sense resistors, further improving efficiency and cost.

Loop operation

BL8028 uses a PWM current-mode control scheme. An open-loop comparator compares the integrated voltage-feedback signal against the sum of the amplified current-sense signal and the slope compensation ramp. At each rising edge of the internal clock, the internal high-side MOSFET turns on until the PWM comparator terminates the on cycle. During this on-time, current ramps up through the inductor, sourcing current to the output and storing energy in the inductor. The current mode feedback system regulates the peak inductor current as a function of the output voltage error signal. During the off cycle, the internal high-side P-channel

MOSFET turns off, and the internal low-side N-channel MOSFET turns on. The inductor releases the stored energy as its current ramps down while still providing current to the output.

Current sense

An internal current-sense amplifier senses the current through the high-side MOSFET during on time and produces a proportional current signal, which is used to sum with the slope compensation signal. The summed signal then is compared with the error amplifier output by the PWM comparator to terminate the on cycle.

Current limit

There is a cycle-by-cycle current limit on the high-side MOSFET of 2.3A (typ). When the current flowing out of SW exceeds this limit, the high-side MOSFET turns off and the synchronous rectifier turns on. BL8028 utilizes a frequency fold-back mode to prevent overheating during short-circuit output conditions. The device enters frequency fold-back mode when the FB voltage drops below 100mV, limiting the current to 2.3A (typ) and reducing power dissipation. Normal operation resumes upon removal of the short-circuit condition.

Soft-start

BL8028 has an internal soft-start circuitry to reduce supply inrush current during startup conditions. When the device exits under-voltage lockout (UVLO), shutdown mode, or restarts following a thermal shutdown event, the soft-start circuitry slowly ramps up current available at SW.

UVLO

If VIN drops below 2.1V, the UVLO circuit inhibits switching. Once VIN rises above 2.2V, the UVLO clears, and the soft-start sequence activates.

DESIGN PROCEDURE

Setting output voltages

Output voltages are set by external resistors. The FB threshold is 0.6V.

$$R_{TOP} = R_{BOTTOM} \times \left(\frac{V_{OUT}}{0.6} - 1 \right)$$

Input capacitor selection

The input capacitor in a DC-to-DC converter reduces current peaks drawn from the battery or other input power source and reduces switching noise in the controller. The impedance of the input capacitor at the switching frequency should be less than that of the input source so high-frequency switching currents do not pass through the input source. The output capacitor keeps output ripple small and ensures control-loop stability. The output capacitor must also have low impedance at the switching

Thermal shutdown

Thermal shutdown protection limits total power dissipation in the device. When the junction temperature exceeds $T_J = +160^\circ\text{C}$, a thermal sensor forces the device into shutdown, allowing the die to cool. The thermal sensor turns the device on again after the junction temperature cools by 15°C , resulting in a pulsed output during continuous overload conditions. Following a thermal-shutdown condition, the soft-start sequence begins.

frequency. Ceramic, polymer, and tantalum capacitors are suitable, with ceramic exhibiting the lowest ESR and high-frequency impedance. Output ripple with a ceramic output capacitor is approximately as follows:


$$\Delta I_L = \frac{V_{OUT}}{L \times f_S} \times \left(1 - \frac{V_{OUT}}{V_{IN}} \right)$$

$$\Delta V_{OUT} = \frac{V_{OUT}}{8 \times f_S^2 \times L \times C_{OUT}} \times \left(1 - \frac{V_{OUT}}{V_{IN}} \right)$$

If the capacitor has significant ESR, the output ripple component due to capacitor ESR is as follows:

$$\Delta V_{OUT} = \frac{V_{OUT}}{f_S \times L} \times \left(1 - \frac{V_{OUT}}{V_{IN}} \right) \times R_{ESR}$$

LAYOUT GUIDE

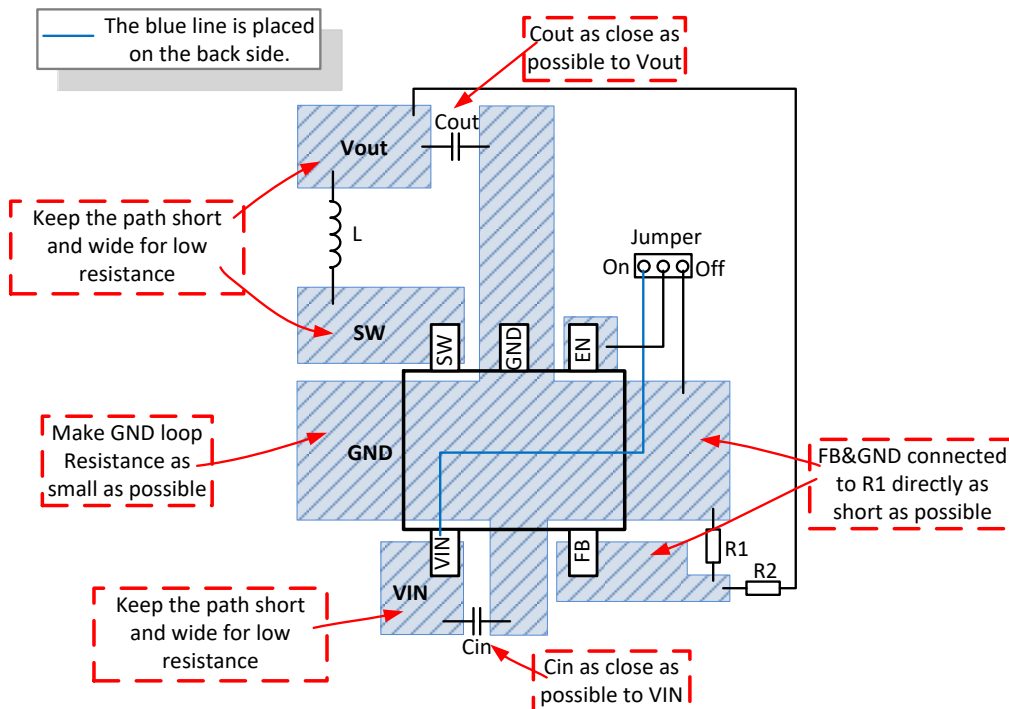


PACKAGE OUTLINE

Package	SOT23-5	Devices per reel	3000pcs
Package specification:			
<p>Dimensions (mm):</p> <ul style="list-style-type: none"> Total width: 2.9 ± 0.2 Pin 5 to Pin 4 distance: 1.9 ± 0.2 (0.95 to 0.95) Pin 5 width: 5 Pin 4 width: 4 Pin 1 to Pin 3 distance: 0.4 ± 0.1 Pin 1 width: 1 Pin 2 width: 2 Pin 3 width: 3 Package height: $1.6^{+0.2}_{-0.1}$ Package thickness: 2.8 ± 0.3 Pin 5 height: $1.1^{+0.2}_{-0.1}$ Pin 4 height: 0.8 ± 0.1 Pin 1 to Pin 3 height: 0 to 0.1 Pin 1 to Pin 3 length: $0.15^{+0.1}_{-0.05}$ Pin 1 to Pin 3 thickness: 0.2 MIN. 			
Unit: mm			

Package	DFN2x2 -6	Devices per reel	3000Pcs	Vendor	HuaTian Technology(Xi'an) Co., Ltd
---------	-----------	------------------	---------	--------	------------------------------------

Package dimension:

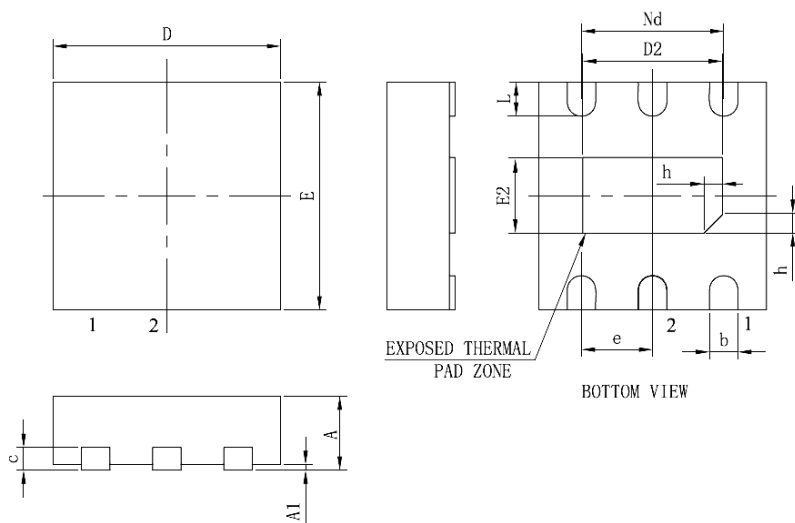


SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	—	0.02	0.05
b	0.25	0.30	0.35
c	0.18	0.20	0.25
D	1.95	2.00	2.05
D2	1.00	1.23	1.45
e	0.65BSC		
Nd	1.30BSC		
E	1.95	2.00	2.05
E2	0.50	0.68	0.85
L	0.25	0.30	0.40
h	0.10	0.15	0.20
载体尺寸 (mm)	63*43		

Unit: mm

Package	DFN2x2 -6	Devices per reel	3000Pcs	Vendor	Jiangxi S-core Microelectronics Corp, Ltd
---------	-----------	------------------	---------	--------	---

Package dimension:

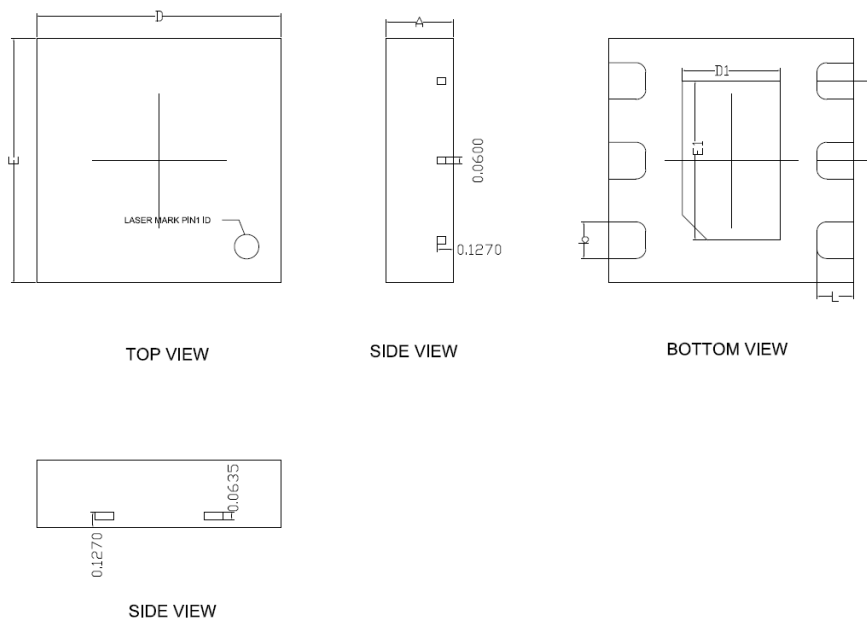


COMMON DIMENSION(MM)			
SYMBOL	MIN	NOM	MAX
A	0.50	0.55	0.60
b	0.25	0.30	0.35
D	1.90	2.00	2.10
E	1.90	2.00	2.10
D1	1.20	1.30	1.40
E1	0.70	0.80	0.60
e	0.650 REF.		
L	0.25	0.30	0.35


Unit: mm

Package	DFN1.6x1.6 -6	Devices per reel	3000Pcs	Vendor	Suzhou Good-ark Electronics Co., Ltd
---------	---------------	------------------	---------	--------	--------------------------------------


Package dimension:

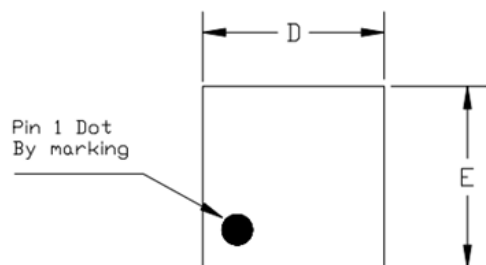

TOP VIEW

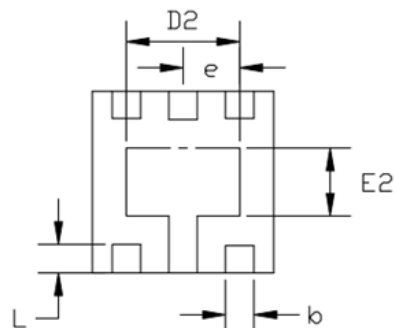

BOTTOM VIEW

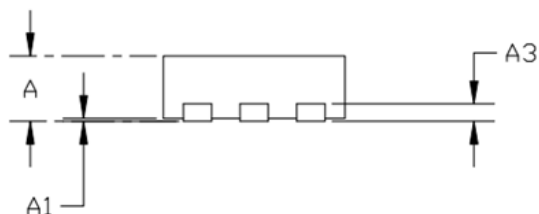


SIDE VIEW

PKG. REF.	COMMON DIMENSIONS(MM)		
	MIN.	NOM.	MAX.
A	0.50	0.55	0.60
A1	0.00	-	0.05
A3	0.15 REF.		
D	1.55	1.60	1.65
E	1.55	1.60	1.65
D2	0.85	1.00	1.10
E2	0.45	0.60	0.70
L	0.20	0.25	0.30
b	0.20	0.25	0.30
e	0.50 BSC		

Unit: mm

Package	DFN1.6x1.6 -6	Devices per reel	5000Pcs	Vendor	TRS Microelectronics Co., Ltd
---------	---------------	------------------	---------	--------	-------------------------------

Package dimension:

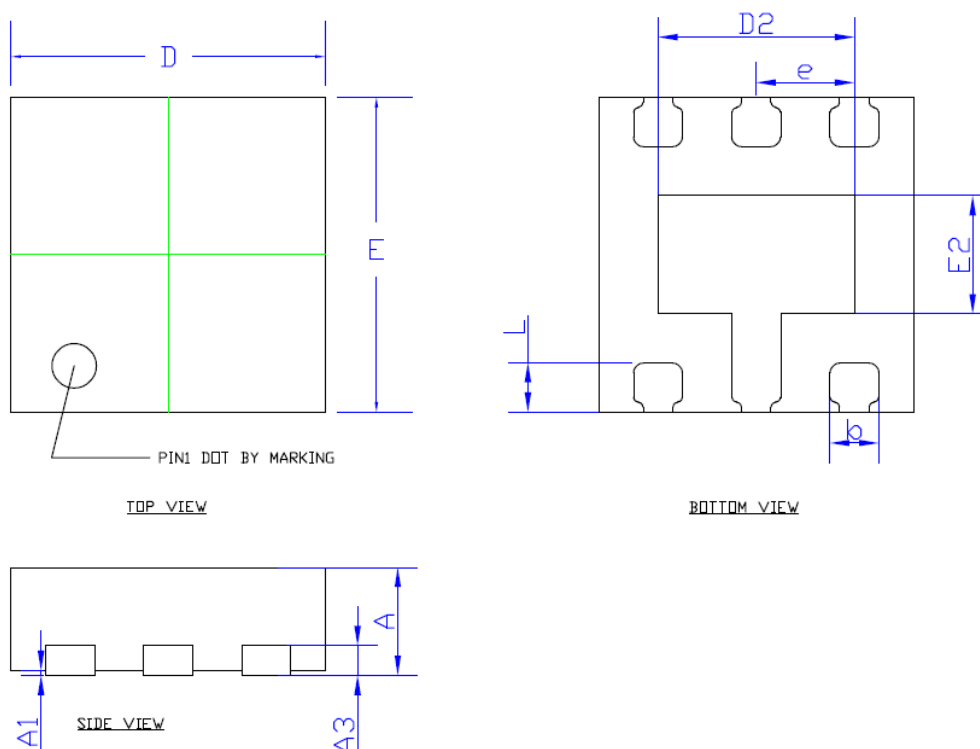

Symbol	DIMENSION In Millimeters (MM)			DIMENSION In Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	0.500	0.550	0.600	0.020	0.022	0.024
A3	0.152 REF			0.006 REF		
A1	0.000	--	0.050	0.000	--	0.002
D	1.550	1.600	1.650	0.061	0.063	0.065
E	1.550	1.600	1.650	0.061	0.063	0.065
D2	0.850	1.000	1.100	0.033	0.039	0.043
E2	0.450	0.600	0.700	0.018	0.024	0.028
L	0.200	0.250	0.300	0.008	0.010	0.012
b	0.200	0.250	0.300	0.008	0.010	0.012
e	0.500 BSC			0.020 BSC		

Unit: mm

单击下面可查看定价，库存，交付和生命周期等信息

[>>BELLING\(上海贝岭\)](#)