

SMPS Controller

Features

- Internal Regulator Provides a Stable 5V Reference Supply Trimmed to 5%
- Uncommitted Output TR for 200mA Sink or Source Current
- Output Control For Push-Pull or Single Ended Operation
- Variable Duty Cycle By Dead Time Control (Pin 4) Complete PWM Control Circuit
- On-Chip Oscillator With Master or Slave Operation
- Internal Circuit Prohibits Double Pulse at Either Output

16-DIP



SL494CN

16-SOP




SL494CNS

Description

The SL494CN is used for the control circuit of the PWM switching regulator. The SL494CN consists of 5V reference voltage circuit, two error amplifiers, a flip flop, an output control circuit, a PWM comparator, a dead time comparator and an oscillator. This device can be operated in the switching frequency of 1kHz to 300kHz.

Internal Block Diagram

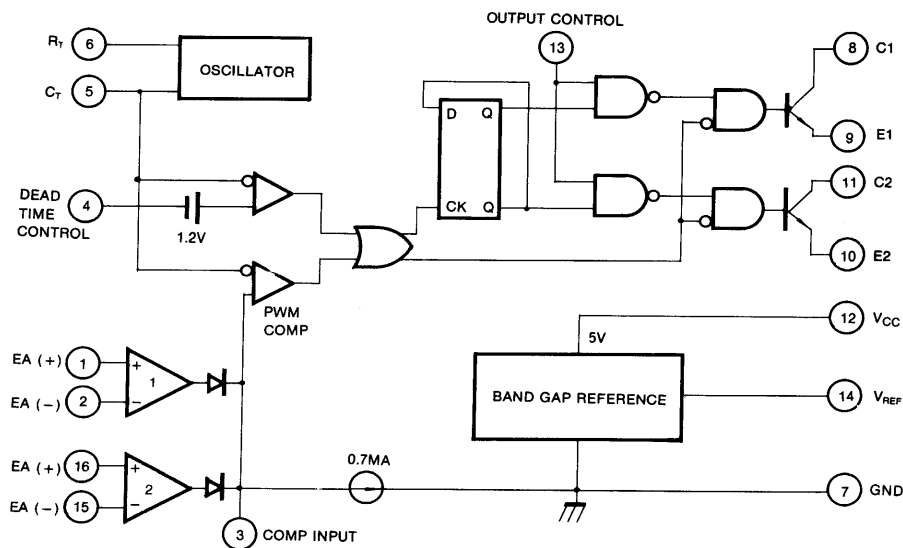

Absolute Maximum Ratings

| Parameter | Symbol | Value | Unit |
|---|------------------|-------------------------------|------|
| Supply Voltage | V _{CC} | 41 | V |
| Collector Supply Voltage | V _C | 41 | V |
| Output Current | I _O | 250 | mA |
| Amplifier Input Voltage | V _{IN} | V _{CC} +0.3 | V |
| Power Dissipation (T _A = 25°C) | P _D | 1 (SL494CN) 0.9 (SL494CNS) | W |
| Operating Temperature Range | T _{OPR} | 0 ~ +70 | °C |
| Storage Temperature Range | T _{STG} | -65 ~ +150 | °C |


Electrical Characteristics

(VCC = 20V, f = 10kHz, TA = 0°C to +70°C, unless otherwise specified)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---|----------|--------------------------------------|------|------|------|------|
| REFERENCE SECTION | | | | | | |
| Reference Output Voltage | VREF | IREF = 1mA | 4.75 | 5.0 | 5.25 | V |
| Line Regulation | ΔVREF | VCC = 7V to 40V | - | 2.0 | 25 | mV |
| Temperature Coefficient of VREF | ΔVREF/ΔT | TA = 0°C to 70°C | - | 0.01 | 0.03 | %/°C |
| Load Regulation | ΔVREF | IREF = 1mA to 10mA | - | 1.0 | 15 | mV |
| Short-Circuit Output Current | ISC | VREF = 0V | 10 | 35 | 50 | mA |
| OSCILLATOR SECTION | | | | | | |
| Oscillation Frequency | f | CT = 0.01μF, RT = 12kΩ | - | 10 | - | kHz |
| Frequency Change with Temperature | Δf/ΔT | CT = 0.01μF, RT = 12kΩ | - | - | 2 | % |
| DEAD TIME CONTROL SECTION | | | | | | |
| Input Bias Current | IBIAS | VCC = 15V, 0V ≤ V4 ≤ 5.25V | - | -2.0 | -10 | μA |
| Maximum Duty Cycle | D(MAX) | VCC = 15V, V4 = 0V O.C Pin = VREF | 45 | - | - | % |
| Input Threshold Voltage | VITH | Zero Duty Cycle | - | 3.0 | 3.3 | V |
| | | Max. Duty Cycle | 0 | - | - | |
| ERROR AMP SECTION | | | | | | |
| Input Offset Voltage | VIO | V3 = 2.5V | - | 2.0 | 10 | mV |
| Input Offset Current | IIO | V3 = 2.5V | - | 25 | 250 | mA |
| Input Bias Current | IBIAS | V3 = 2.5V | - | 0.2 | 1.0 | μA |
| Common Mode Input Voltage | VCM | 7V ≤ VCC ≤ 40V | -0.3 | - | VCC | V |
| Open-Loop Voltage Gain | GVO | 0.5V ≤ V3 ≤ 3.5V | 70 | 95 | - | dB |
| Unit-Gain Bandwidth (Note1) | BW | - | - | 650 | - | kHz |
| PWM COMPARATOR SECTION | | | | | | |
| Input Threshold Voltage | VITH | Zero Duty Cycle | - | 4 | 4.5 | V |
| Input Sink Current | ISINK | V3=0.7V | -0.3 | -0.7 | - | mV |
| OUTPUT SECTION | | | | | | |
| Output Saturation Voltage Common Emitter | VCE(SAT) | VE = 0, IC = 200mA | - | 1.1 | 1.3 | V |
| | VCC(SAT) | VC = 15V, IE = -200mA | - | 1.5 | 2.5 | |
| Collector Off-State Current | IC(OFF) | VCC = 40V, VCE = 40V | - | 2 | 100 | μA |
| Emitter Off-State Current | IE(OFF) | VCC = VC = 40V, VE = 0 | - | - | -100 | |
| TOTAL DEVICE | | | | | | |
| Supply Current | ICC | Pin 6 = VREF, VCC = 15V | - | 6 | 10 | mA |
| OUTPUT SWITCHING CHARACTERISTICS | | | | | | |
| Rise Time | tR | - | - | - | - | - |
| Common Emitter | - | - | - | 100 | 200 | ns |
| | | | | | | |
| Fall Time | tF | - | - | - | - | - |
| Common Emitter | - | - | - | 25 | 100 | ns |
| | | | | | | |

Typical Application


Pulse Width Modulated Step-down Converter

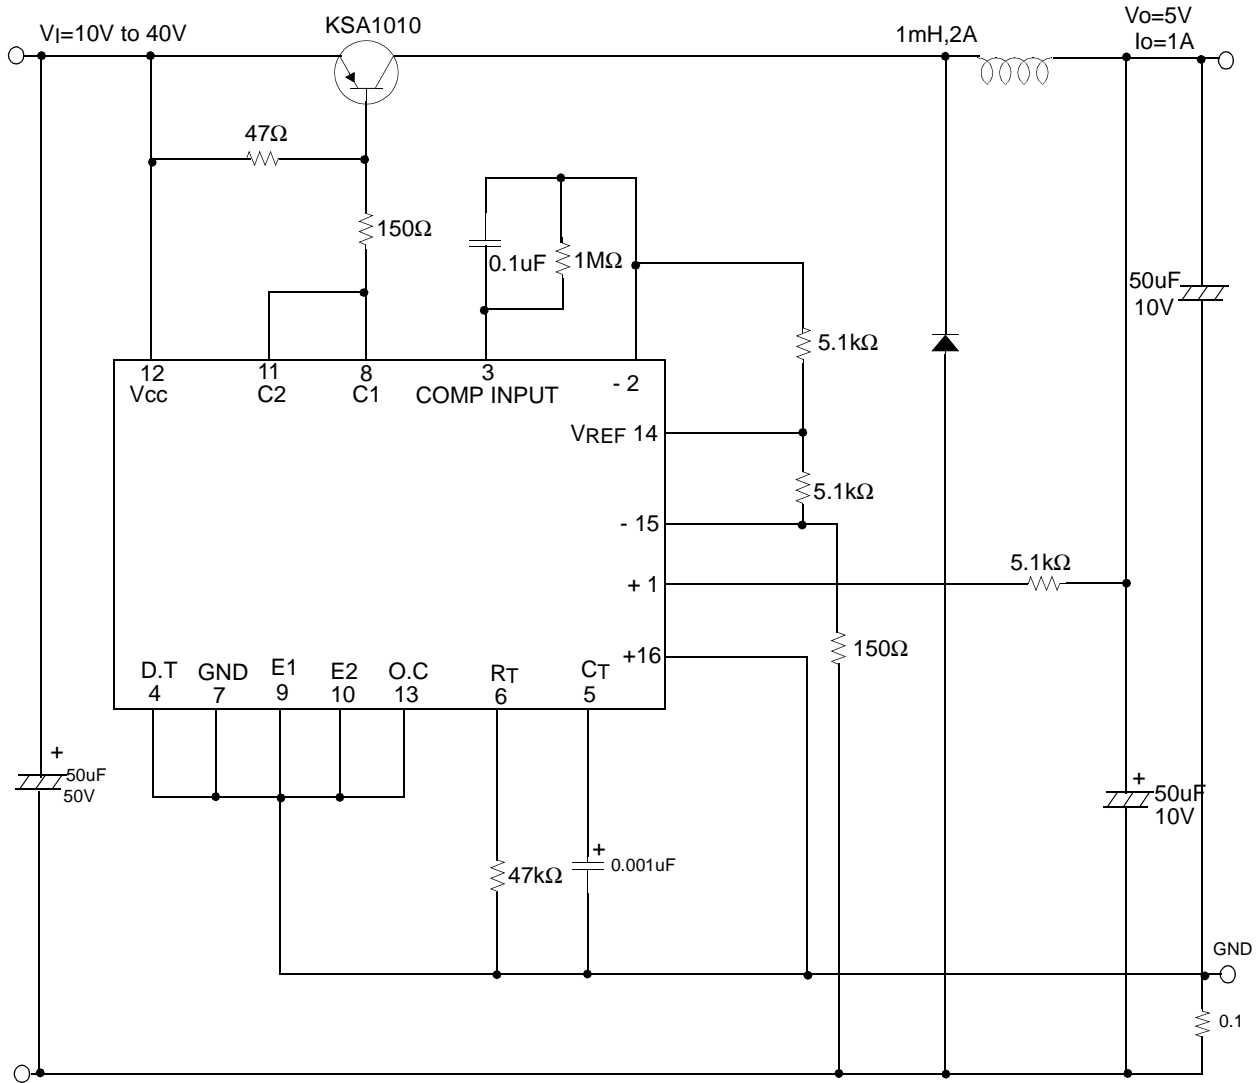

Mechanical Dimensions

Package


16-DIP

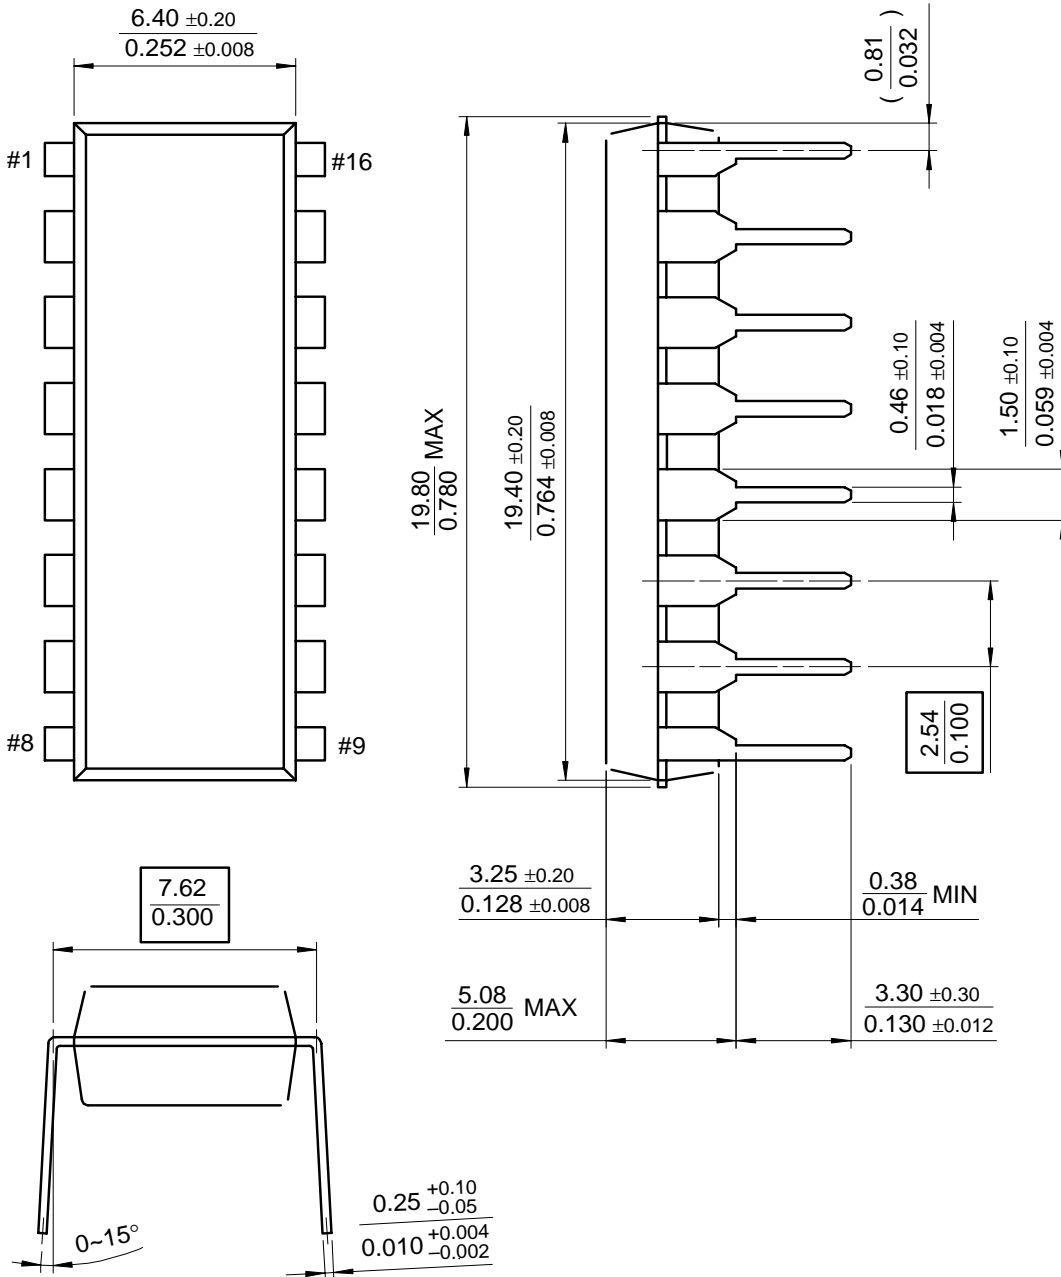

Mechanical Dimensions

Package

16-SOP

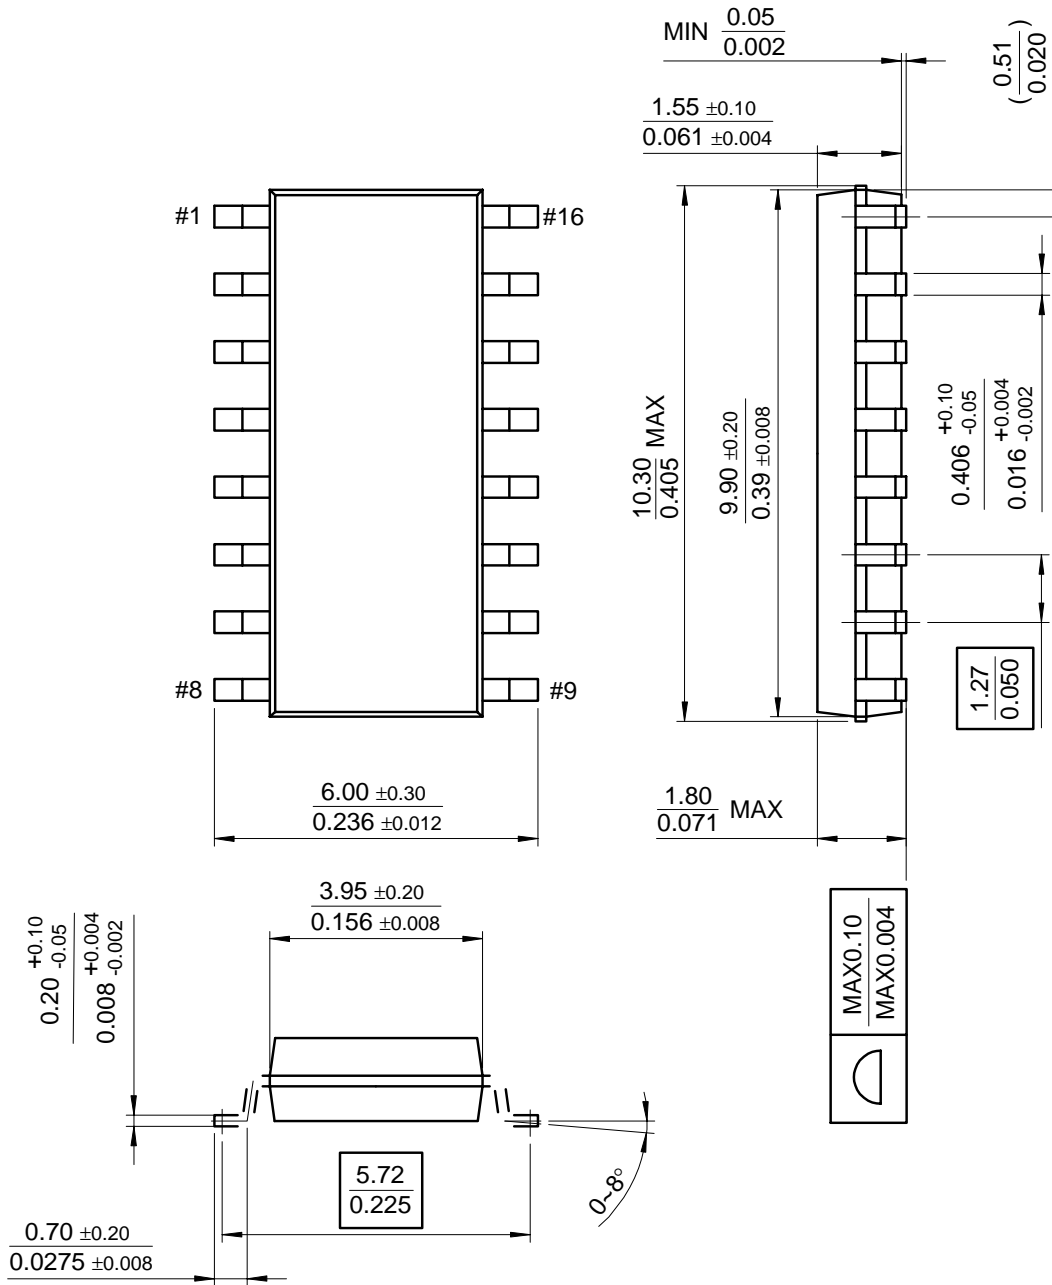

单击下面可查看定价，库存，交付和生命周期等信息

[>>Slkor\(萨科微\)](#)