



- +1500W continuous output power (no derating across full DC input range)
- 93% efficiency
- 12V main output
- 3.3V; 5V or 12V Standby Output Options
- 1U height: 2.15" x 12.65" x 1.57"
- > 35 Watts per cubic inch density
- N+1 redundancy, hot plug/swap (up to 8 modules in parallel)
- Active current sharing on 12V main output; Integral ORing /isolation device MOSFET
- Internal cooling fan (variable speed) Overvoltage, overcurrent, overtemperature protection
- PMBus™/I<sup>2</sup>C interface with LED status indicators
- RoHS compliant
- Two Year Warranty

## PRODUCT OVERVIEW

D1U54-D-1500-12-HxxC series are highly efficient 1500 watt, DC input front end power modules with a 12V main output and a choice of 3.3V, 5V or 12VDC (30W max) standby rail. The power module is able to current share with up to eight (8) other power modules of the same type operating in parallel or N+1 redundancy. The supplies may be hot plugged, and include integral output isolation devices.

The power modules are fully protected from overload and overvoltage and are able to auto-recover from overtemperature faults. A Status LED is provided on the front panel and additional control and status reporting is provided by hardware logic signals and via a PMBus™ digital interface.

A low profile sub 1U height enclosure with power density of >35W/in<sup>3</sup> make this an excellent choice for delivering reliable, efficient power to servers, workstations, storage systems and other 12V distributed power systems including direct operation from intermediate bus converters.

## ORDERING GUIDE

| Part Number          | Internal MPN | Power Output                   | Main Output | Standby Output | Airflow       |
|----------------------|--------------|--------------------------------|-------------|----------------|---------------|
| D1U54-D-1500-12-HC4C | M1900        | 1500W<br>-48 to -60Vdc<br>45°C | 12V         | 3.3V           | Back to Front |
| D1U54-D-1500-12-HA4C | M1897        |                                |             | 5V             |               |
| D1U54-D-1500-12-HB4C | M1903        |                                |             | 12V            |               |
| D1U54-D-1500-12-HC3C | M1901        |                                |             | 3.3V           | Front to Back |
| D1U54-D-1500-12-HA3C | M1898        |                                |             | 5V             |               |
| D1U54-D-1500-12-HB3C | M1902        |                                |             | 12V            |               |

## INPUT CHARACTERISTICS

| Parameter                        | Conditions   | Min | Typical | Max | Units |
|----------------------------------|--|-----|---------|-----|-------|
| DC Input Voltage Operating Range |  | -40 | -48/-60 | -72 |       |
| Turn-on Input Voltage            | Ramp Up  | -39 | -40     | -41 | Vdc   |
| Turn-off Input Voltage           | Ramp Down  | -35 | -36     | -37 |       |
| Maximum Current                  | 1500W, Vin = -48Vdc to -60Vdc                                      |     |         | 51  | Adc   |
| DC Input Inrush Peak Current     | Cold start between 0 to -48Vdc<br>200ms                            |     |         | 50  | Apk   |
|                                  |  |     |         | 100 |       |
| Efficiency (-48Vdc)              | 20% FL   |     | 92      |     | %     |
|                                  | 50% FL   |     | 93      |     |       |
|                                  | 100% FL  |     | 90      |     |       |
| Reverse polarity protection      | Withstand Reversed input cables; no internal/external fuse failure | +40 |         | +72 | Vdc   |

## OUTPUT VOLTAGE CHARACTERISTICS

| Output Voltage Parameter | Conditions                            | Min.                         | Typical | Max. | Units  |        |
|--------------------------|---------------------------------------|------------------------------|---------|------|--------|--------|
| Main 12V                 | Voltage Set Point                     |                              | 12      |      | Vdc    |        |
|                          | Line & Load Regulation                | Combined, measured at remote | -1      |      | +1.5   | %      |
|                          | Ripple & Noise <sup>1,2</sup>         | 20MHz Bandwidth              |         |      | 120    | mV P-P |
|                          | Output Current                        | -40Vdc to -72Vdc DC input    | 0       |      | 125A   | A      |
|                          | Load Capacitance                      |                              |         |      | 30,000 | µF     |
| 3.3VSB                   | Voltage Set Point                     |                              | 3.3     |      | Vdc    |        |
|                          | Line & Load Regulation                | Combined regulation          | 3.14    |      | 3.46   |        |
|                          | Ripple Voltage & Noise <sup>1,3</sup> | 20MHz Bandwidth              |         |      | 120    | mV P-P |
|                          | Output Current                        |                              | 0       |      | 4      | A      |
|                          | Load Capacitance                      |                              |         |      | 3,000  | µF     |
| 5VSB                     | Voltage Set Point                     |                              | 5.0     |      | Vdc    |        |
|                          | Line & Load Regulation                |                              | 4.76    |      | 5.24   |        |
|                          | Ripple Voltage & Noise <sup>1,3</sup> | 20MHz Bandwidth              |         |      | 120    | mV P-P |
|                          | Output Current                        |                              | 0       |      | 4      | A      |
|                          | Load Capacitance                      |                              |         |      | 3,000  | µF     |
| 12VSB                    | Voltage Set Point                     |                              | 12.0    |      | Vdc    |        |
|                          | Line & Load Regulation                |                              | 11.4    |      | 12.6   |        |
|                          | Ripple Voltage & Noise <sup>1,3</sup> | 20MHz Bandwidth              |         |      | 120    | mV P-P |
|                          | Output Current                        |                              | 0       |      | 2.5    | A      |
|                          | Load Capacitance                      |                              |         |      | 1,000  | µF     |

<sup>1</sup> Ripple and noise are measured with 0.1 µF of ceramic capacitance and 10 µF of tantalum capacitance on each of the power supply outputs. A short coaxial cable to the measurement 'scope input, is used.

<sup>2</sup> Minimum load 5A

<sup>3</sup> Minimum load 0.25A



Available now at: [www.murata-ps.com/en/3d/acdc.html](http://www.murata-ps.com/en/3d/acdc.html)



For full details go to [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)



Test Certificate and Test Report

| OUTPUT CHARACTERISTICS  |  |   |           |      |       |
|---|--|---|-----------|------|-------|
| Parameter   | Conditions   | Min.  | Typ.      | Max. | Units |
| Remote Sense (Main Output)  | Overall compensation at full load; +VE & -VE connections |   |           | 120  | mV    |
| Output Rise (Monotonic)   | 10% to 95% rise time                                     | No positive voltage excursion above set point |           |      |       |
| Startup Time  | DC Ramp Up   |   |           | 3    | s     |
|   | PS_ON activation   |   | 200       |      | ms    |
| Transient Response  | 12V, 10%-60% and 50-100% or 60%-10% and 100-50% step     |   | ±600      |      | mV    |
|   | 3.3/5VSB 50-100% or 100-50% step load 1A/μs slew rate    |   | ±165/±250 |      |       |
| Current Sharing Accuracy (between sharing modules; up to 8 in parallel) | At 100% load   |   |           | ±10  | %     |
| Hot Swap Transients   |  |   |           | 5    | %     |
| Hold Up Time <sup>2</sup>   | FL (Full Load); 48VDC nominal input prior to hold up     | 1   |           |      | ms    |
|   | HL (Half Load); 48VDC nominal input prior to hold up     | 2   |           |      | ms    |

<sup>2</sup> Assumes deployment within systems utilizing dual redundant "A" and "B" DC input feeds

| ENVIRONMENTAL CHARACTERISTICS                     |   |      |      |            |         |
|---|---|------|------|------------|---------|
| Parameter   | Conditions  | Min. | Typ. | Max.       | Units   |
| Storage Temperature Range                         | Non-Condensing  | -40  |      | 70         | °C      |
| Operating Temperature Range                       | 1500W Output Power; See Derating Curves   | -5   |      | 45         |         |
| Operating Humidity                                | Non-Condensing  | 5    |      | 90         | %       |
| Storage Humidity                                  |   | 5    |      | 95         |         |
| Altitude (no derating at 40°C)                    |   | 3000 |      |            | m       |
| Shock   | Non-Operating   |      |      | 30         | G       |
| Sinusoidal Vibration                              | Non-operating, 0.5G; 5-500Hz  |      |      |            | K Hours |
| MTBF (Target)                                     | Telcordia SR-332 M1C1 @ 40°C  | 452  |      |            |         |
| Safety Approvals (Standards) – Pending Submission | CAN/CSA C22.2 No 60950-1-07, Am.1:2011, Am 2:2014   |      |      |            |         |
|   | ANSI/UL 60950-1-2014  |      |      |            |         |
|   | IEC60950-1:2005 (2nd Ed.), Am 1:2009 + Am 2:2013  |      |      |            |         |
|   | CQC – GB17625.1-2012; GB4943.1-2011; GB/T9254-2008(Class A)<br>BIS – IS13252 (part 1); 2010+A1:2013+A2:2015/IEC60950-1:2005+A1:2009+A2:2013 |      |      |            |         |
| Input Fusing                                      | Internal 60A/170VDC fast blow fuse on the DC line input   |      |      |            |         |
| Weight  |   |      |      | 2.314/1.05 | lbs/kg  |

| PROTECTION CHARACTERISTICS |                  |   |      |      |      |       |
|----------------------------|------------------|---|------|------|------|-------|
| Output Voltage             | Parameter        | Conditions  | Min. | Typ. | Max. | Units |
| N/A                        | Over-Temperature | Air inlet temperature; Auto re-start  | 60   |      | 70   | °C    |
|                            | Over-Voltage     | Latching; toggle PS_ON or recycle DC input to reset   | 13   |      | 14   | V     |
| 12V (Main)                 | Over-Current     | For slow overload events a constant current will be sustained for 1sec followed by a latch off that will auto reset in 5secs.<br>For hard (short circuit) events the output will shut down within 50ms and auto restart within 200ms. This cycle will be repeated ten times at which point the output will permanently latch off. The power module will require to be reset by recycling the incoming DC source or by "toggling" PS_ON. | 140  |      | 160  | A     |
| 3.3VSB                     | Over-Voltage     | Latching; toggle PS_ON or recycle DC input to reset   | 3.4  |      | 4.0  | V     |
|                            | Over-Current     | Shutdown followed by auto-recovery  | 4.5  |      | 6    | A     |
| 5VSB                       | Over-Voltage     | Latching; toggle PS_ON or recycle DC input to reset   | 5.4  |      | 6.0  | V     |
|                            | Over-Current     | Shutdown followed by auto-recovery  | 4.5  |      | 6    | A     |
| 12VSB                      | Over-Voltage     | Latching; toggle PS_ON or recycle DC input to reset   | 13.0 |      | 14.5 | V     |
|                            | Over-Current     | Shutdown followed by auto-recovery  | 2.75 |      | 3.75 | A     |

| ISOLATION CHARACTERISTICS             |                            |      |      |      |       |
|---------------------------------------|----------------------------|------|------|------|-------|
| Parameter                             | Conditions                 | Min. | Typ. | Max. | Units |
| Insulation Safety Rating/Test Voltage | Input to Outputs           |      | 1500 |      | Vdc   |
| Isolation                             | Output to Chassis (Ground) |      | 500  |      | Vdc   |

**EMISSIONS AND IMMUNITY**

| Characteristic                            | Standard                               | Compliance                                  |
|---|--|---|
| Conducted Emissions                       | FCC 47 CFR Part 15<br>CSIPR 22/EN55022 | Class A with 6dB margin                     |
| ESD Immunity                              | IEC/EN 61000-4-2;                      | Level 4; Criteria A                         |
| Radiated Field Immunity                   | IEC/EN 61000-4-3                       | Level 2; Criteria B                         |
| Electrical Fast Transients/Burst Immunity | IEC/EN 61000-4-4                       | Level 2; Criteria A                         |
| Surge Immunity                            | IEC/EN 61000-4-5                       | Level 2; Criteria A                         |
| RF Conducted Immunity                     | IEC/EN 61000-4-6                       | Level 2; Criteria A                         |
| Magnetic Field Immunity                   | IEC/EN 61000-4-8                       | 3A/m; Criteria B                            |
| Voltage Dips & Interruptions              | NEBS GR-1089-CORE Issue                | Relevant sections and compliance levels TBD |

**STATUS INDICATORS**

| Conditions   | GREEN (Power) LED Status | AMBER (Fault) LED Status |
|--|--------------------------|--------------------------|
| No incoming DC supply present; power module is completely off.                               | LED not illuminated      | LED not illuminated      |
| Standby Rail ON; Main Output OFF; DC input present & correct                                 | Blinking                 | LED not illuminated      |
| Standby Rail ON; Main Output ON  | Solid Green              | LED not illuminated      |
| Main Output overcurrent; undervoltage, overvoltage warning                                   | LED not illuminated      | Solid Amber              |
| FAN_FAULT; overtemperature; standby rail overcurrent, Main Output overcurrent or overvoltage | LED not illuminated      | Solid Amber              |
| Power Module Warning Event   | LED not illuminated      | Blinking                 |

**ADDR ADDRESS SELECTION** [link to additional ADDR signal details](#)

| ADDR pin (A3) resistor to GND<br>(K-ohm)* | Power Supply Main Controller<br>(Serial Communications Slave Address) | Power Supply External EEPROM<br>(Serial Communications Slave Address) |
|---|---|---|
| 0.82                                      | 0xB0  | 0xA0  |
| 2.7                                       | 0xB2  | 0xA2  |
| 5.6                                       | 0xB4  | 0xA4  |
| 8.2                                       | 0xB6  | 0xA6  |
| 15  | 0xB8  | 0xA8  |
| 27  | 0xBA  | 0xAA  |
| 56  | 0xBC  | 0xAC  |
| 180                                       | 0xBE  | 0xAE  |


\* The resistor shall be +/-5% tolerance

| STATUS AND CONTROL SIGNALS          |                    |  | Interface Details  |
|-------------------------------------|--------------------|--|--|
| Signal Name                         | I/O                | Description  | Interface Details  |
| INPUT_OK (DC Source)                | Output             | The signal output is driven high when the input source is available and within acceptable limits. The output is driven low to indicate loss of input power. There is a minimum of 0.5ms pre-warning time before the signal is driven low prior to the PWR_OK signal going low. The power supply must ensure that this interface signal provides accurate status when input source is lost.   | Pulled up internally via 10K to VDD <sup>1</sup> .<br>A logic high >2.0Vdc<br>A logic low <0.8Vdc<br>Driven low by internal CMOS buffer (open drain output). |
| PW_OK (Output OK)                   | Output             | The signal is asserted (driven high) by the power supply to indicate that all outputs are valid. If any of the outputs fail then this output will be hi-Z or driven low. The output is driven low to indicate that the Main output is outside of lower limit of regulation (1.4Vdc).   | Pulled up internally via 10K to VDD <sup>1</sup> .<br>A logic high >2.0Vdc<br>A logic low <0.8Vdc<br>Driven low by internal CMOS buffer (open drain output). |
| SMB_ALERT (FAULT/WARNING)           | Output             | The signal output is driven low to indicate that the power supply has detected a warning or fault and is intended to alert the system. This output must be driven high when the power is operating correctly (within specified limits). The signal will revert to a high level when the warning/fault stimulus (that caused the alert) is removed.   | Pulled up internally via 10K to VDD <sup>1</sup> .<br>A logic high >2.0Vdc<br>A logic low <0.8Vdc<br>Driven low by internal CMOS buffer (open drain output). |
| PRESENT_L (Power Supply Absent)     | Output             | The signal is used to detect the presence (installed) of a module by the host system. The signal is connected to PSU logic SGND within the power module.   | Passive connection to +VSB_Return.<br>A logic low <0.8Vdc  |
| PS_ON (Power Supply Enable/Disable) | Input              | This signal is pulled up internally to the internal housekeeping supply (within the power supply). The power supply main 12Vdc output will be enabled when this signal is pulled low to +VSB_Return. In the low state the signal input shall not source more than 1mA of current. The 12Vdc output will be disabled when the input is driven higher than 2.4V, or open circuited. Cycling (toggling) this signal shall clear latched fault conditions.   | Pulled up internally via 10K to VDD <sup>1</sup> .<br>A logic high >2.0Vdc<br>A logic low <0.8Vdc<br>Input is via CMOS Schmitt trigger buffer.               |
| PS_KILL                             | Input              | This signal is used during hot swap to disable the main output during hot swap extraction. The input is pulled up internally to the internal housekeeping supply (within the power supply). The signal is provided on a short (lagging pin) and should be connected to +VSB_Return.  | Pulled up internally via 10K to VDD <sup>1</sup> .<br>A logic high >2.0Vdc<br>A logic low <0.8Vdc<br>Input is via CMOS Schmitt trigger buffer.               |
| ADDR (Address Select)               | Input              | An analog input that is used to set the address of the internal slave devices (EEPROM and microprocessor) used for digital communications. <a href="#">Connection of a suitable resistor</a> to +VSB_Return, in conjunction with an internal resistor divider chain, will configure the required address.  | DC voltage between the limits of 0 and +3.3Vdc.  |
| SCL (Serial Clock)                  | Both               | A serial clock line compatible with PMBus™ Power Systems Management Protocol Part 1 – General Requirements Rev 1.1. No additional internal capacitance is added that would affect the speed of the bus. The signal is provided with a series isolator device to disconnect the internal power supply bus in the event that the power module is unpowered.  | VIL is 0.8V maximum<br>VOL is 0.4V maximum when sinking 3mA<br>VIH is 2.1V minimum   |
| SDA (Serial Data)                   | Both               | A serial data line compatible with PMBus™ Power Systems Management Protocol Part 1 – General Requirements Rev 1.1. The signal is provided with a series isolator device to disconnect the internal power supply bus in the event that the power module is unpowered,   | VIL is 0.8V maximum<br>VOL is 0.4V maximum when sinking 3mA<br>VIH is 2.1V minimum   |
| V1_SENSE<br>V1SENSE_RTN             | Input              | Remote sense connections intended to be connected at and sense the voltage at the point of load. The voltage sense will interact with the internal module regulation loop to compensate for voltage drops due to connection resistance between the output connector and the load. If remote sense compensation is not required then the voltage can be configured for local sense by:<br>1. V1_SENSE directly connected to power blades 6 to 10 (inclusive)<br>2. V1_SENSE_RTN directly connected to power blades 1 to 5 (inclusive)   | Compensation for up to 0.12Vdc total connection drop (output and return connections).  |
| ISHARE                              | Bi-Directional Bus | The current sharing signal is connected between sharing units (forming an ISHARE bus). It is an input and/or an output (bi-directional bus) as the voltage on the line controls the current share between sharing units. A power supply will respond to a change in this voltage; however a power supply can also change the voltage depending on the load drawn from it. On a single unit the voltage on the pin (and the common ISHARE bus would read 8VDC at 100% load (module capability). For two identical units sharing the same 100% load this would read 4VDC for perfect current sharing (i.e. 50% module load capability per unit). | Analogue voltage:<br>+8V maximum; 10K to +12V_RTN  |

<sup>1</sup> VDD is an internal voltage rail derived from VSB and an internal housekeeping rail (“diode ORed”); this rail is compatible with the voltage levels of TTL and CMOS logic families.

**TIMING SPECIFICATIONS**

Turn-On Delay & Output Rise Time:

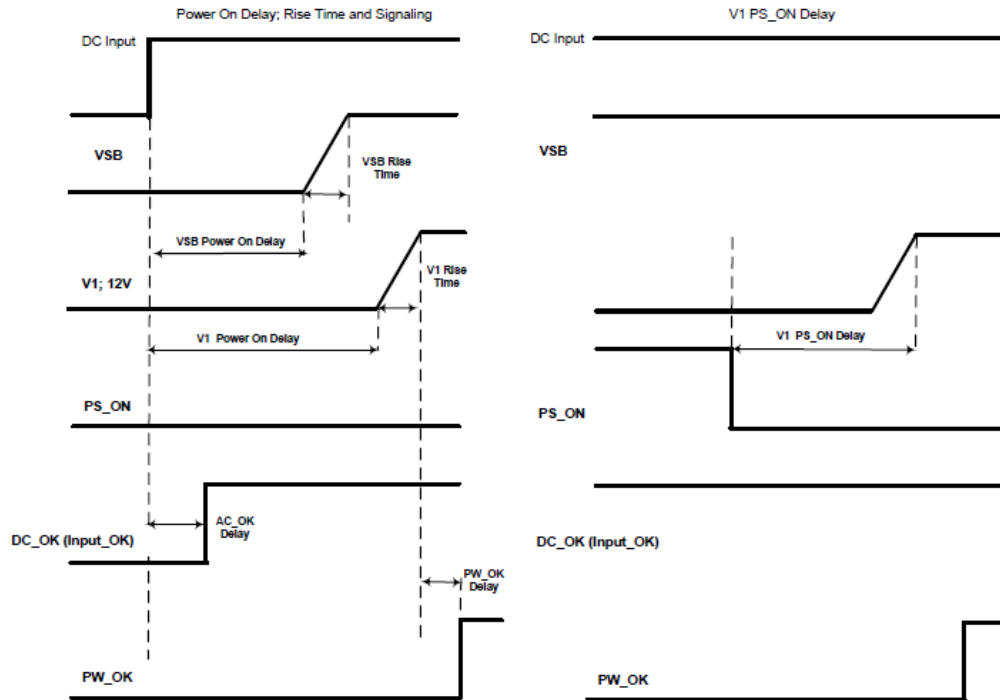


1. The turn-on delay after application of DC input within the operating range shall as defined in the following tables.
2. The output rise times shall be measured from 10% of the nominal output to the lower limit of the regulation band as defined in the following tables.

| Time                 | Min   | Max    |
|----------------------|-------|--------|
| Vsb Rise time        | 20ms  | 150ms  |
| V1 Rise time         | 120ms | 220ms  |
| Vsb Power-on-delay   | 400ms | 1200ms |
| V1 Power-on-delay    | 500ms | 1500ms |
| V1 PS_ON delay       | 100ms | 300ms  |
| V1 PWOK delay        | 300ms | 450ms  |
| DC_OK (Input) detect | 500ms | 1500ms |

**TIMING SPECIFICATIONS**


Turn-Off (Shutdown by PS\_ON)

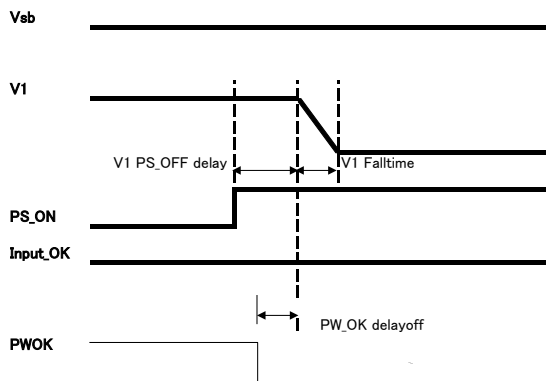

| Turn-Off Timing | Min   | Max | Notes             |
|-----------------|-------|-----|-------------------|
| V1 Fall time    | -     | -   | Must be monotonic |
| V1 PS_OFF delay | 0ms   | 6ms |                   |
| PW_OK delay off | 1.0ms |     |                   |


TIMING SPECIFICATIONS

Power Removal Holdup

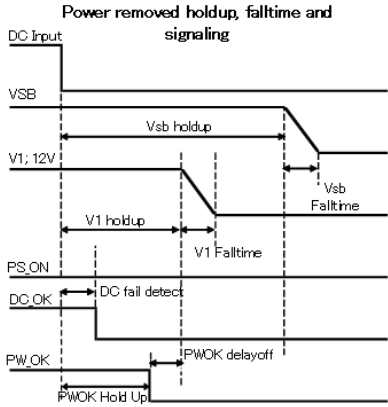


| Power Removal Timing        | Min   | Max    | Notes          |
|-----------------------------|-------|--------|----------------|
| Vsb holdup                  | 3ms   | 25ms   | +VSB Full Load |
| V1 holdup (Total Effective) | 1ms   | -      | 100% load      |
| DC (Input) fail detect      | 400µs | 1000µs |                |
| PWOK delay off              | -     | 0.8ms  | 100% load      |
| PWOK Hold Up                | -     | 2.2ms  |                |

DERATING CURVES

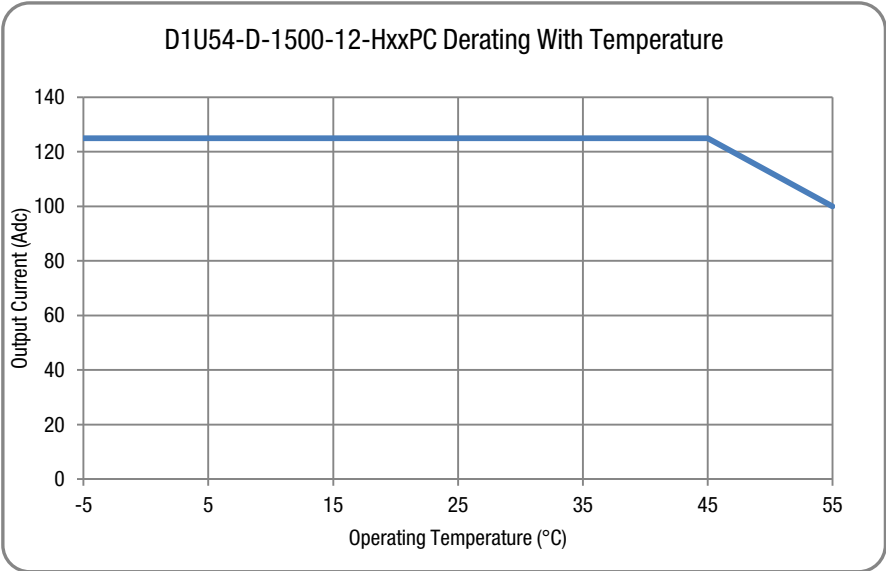

NOTE: The D1U54-D-1500-12-HxxPC power supply has an integral fan; the fan speed is adjusted to achieve the required cooling airflow based on prevailing operating temperature/conditions and output loading.

OUTPUT CONNECTOR AND SIGNAL INTERFACE; FCI 10122460-005LF or Equivalent

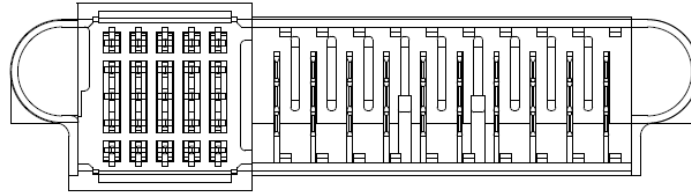

| PART NUMBER                 | ROWS | SIGNALS |   |   |   |   | POWERS |   |   |   |   |   |   |   |   |    |
|-----------------------------|------|---------|---|---|---|---|--------|---|---|---|---|---|---|---|---|----|
|                             |      | 1       | 2 | 3 | 4 | 5 | 1      | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| 10122460-005LF<br>25S + 10P | E    |         |   |   |   |   |        |   |   |   |   |   |   |   |   |    |
|                             | D    |         |   |   |   |   |        |   |   |   |   |   |   |   |   |    |
|                             | C    |         |   |   |   |   |        |   |   |   |   |   |   |   |   |    |
|                             | B    |         |   |   |   |   |        |   |   |   |   |   |   |   |   |    |
|                             | A    |         |   |   |   |   |        |   |   |   |   |   |   |   |   |    |

- 1) With respect to signals columns 5, "3" refers to the shortest level signal pin; the "shortest" pins are the "last to make, first to break" in the mating sequence.
- 2) Actual connector may not appear exactly as shown above. Refer to the manufacturer's datasheet for details

**PIN ASSIGNMENTS: D1U54-D-1500-12-HxxC**

FCI 10122460-005LF or Equivalent (Power Supply)

| Pin            | Function      | Description   |
|----------------|---------------|---|
| 6, 7, 8, 9, 10 | V1 (+12VOUT)  | +12V Main Output  |
| 1, 2, 3, 4, 5  | +12V RTN/PGND | +12V Main Output Return   |
| A1             | +VSB          | Standby Output  |
| B1             | +VSB          | Standby Output  |
| C1             | +VSB          | Standby Output  |
| D1             | +VSB          | Standby Output  |
| E1             | +VSB          | Standby Output  |
| A2             | +VSB_Return   | Standby Output Return   |
| B2             | +VSB_Return   | Standby Output Return   |
| C2             | Unused        | No End User Connection  |
| D2             | Unused        | No End User Connection  |
| E2             | Unused        | No End User Connection  |
| A3             | ADDR          | I2C Address Protocol Selection (Select by appropriate pull down resistor) |
| B3             | Unused        | No End User Connection  |
| C3             | SDA           | I2C Serial Data Line  |
| D3             | V1_SENSE_R    | Remote Sense Return (-VE)   |
| E3             | V1_SENSE      | Remote Sense (+VE)  |
| A4             | SCL           | I2C Serial Clock Line   |
| B4             | PS_ON_L       | Remote On/Off (Enable/Disable)  |
| C4             | SMB_ALERT     | Alert signal to host system   |
| D4             | Unused        | No End User Connection  |
| E4             | DC_OK         | DC Input Source Present & "OK"  |
| A5             | PS_KILL       | Power Supply "kill"; short pin  |
| B5             | ISHARE        | Current Share bus; short pin  |
| C5             | PW_OK         | Power "OK"; short pin   |
| D5             | Unused        | No End User Connection  |
| E5             | PRESENT_L     | Power Module Present; short pin   |

**POWER SUPPLY INPUT TERMINAL BLOCK**


| Supplier                                 | P/N           |
|--|---------------|
| Dinkle Enterprise (Input Terminal Block) | DT-7C-B14W-02 |

**MATING CONNECTORS**

| Function | Supplier               | Part               | Additional Detail |
|----------|------------------------|--------------------|-------------------|
| output   | TE Connectivity (Tyco) | 2-1926739-5        |                   |
| Output   | FCI Connect            | 10108888-R10253SLF |                   |

WIRING DIAGRAM


..... Dotted lines show optional remote sense connections.  
 Optional remote sense lines can be attached to a load that is a distance away from the power supply to improve regulation at the load.

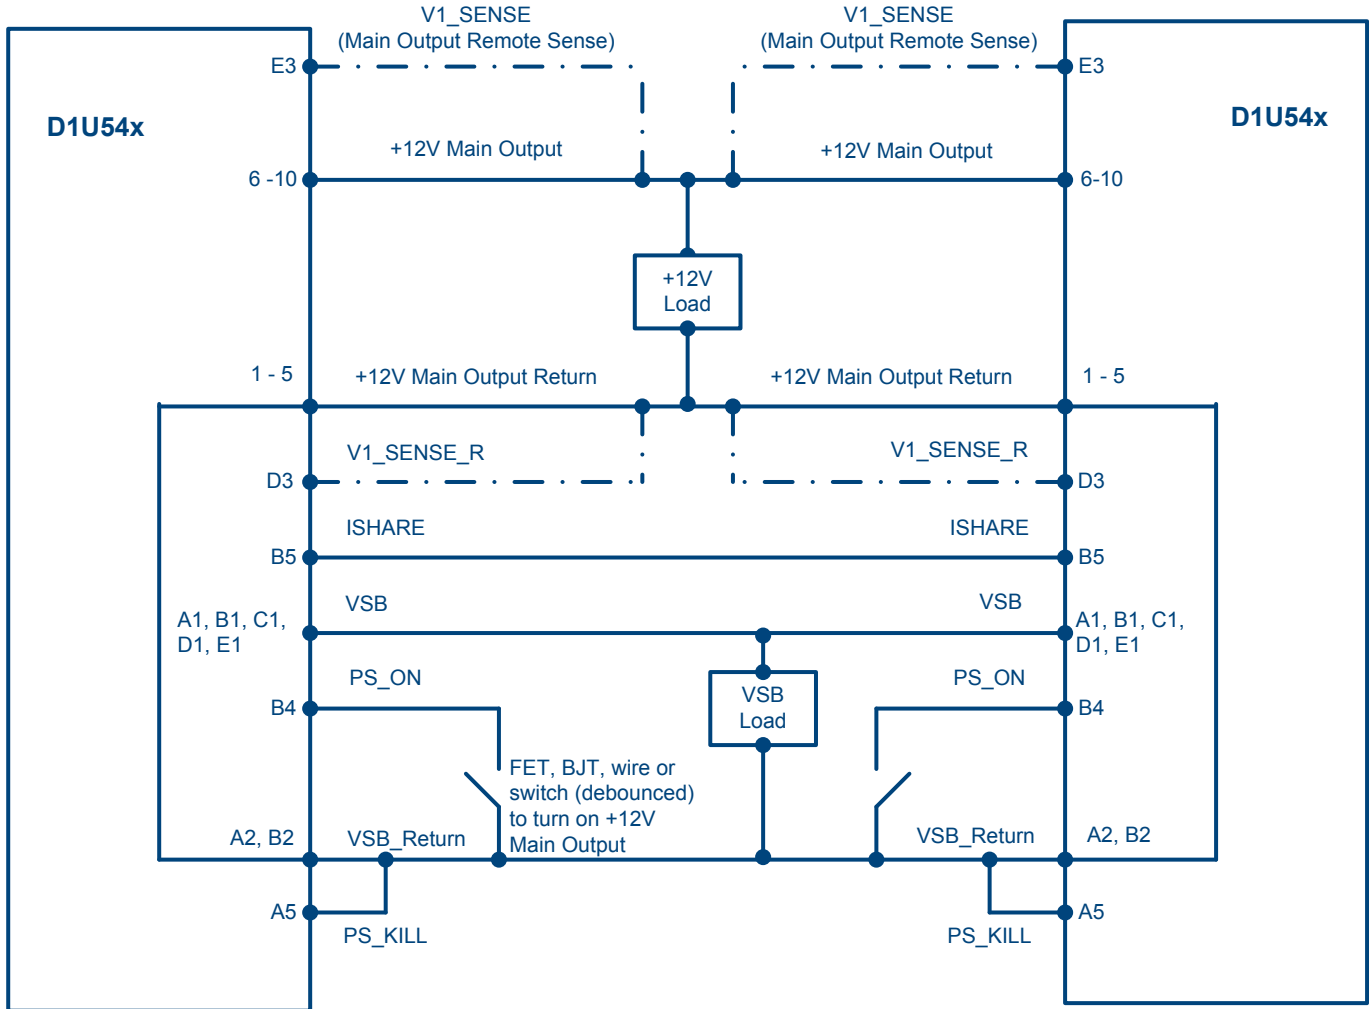


1. Main 12VDC Output: Active share bus. The ISHARE bus (Pin B5 or D4) must be connected on all sharing modules. It is not required that the SENSE signals are connected to the remote load for current share to operate correctly.
2. Up to eight (8) power modules can be connected in parallel (non-redundant) or N+1 configuration. The current share bus is bi-directional (can source or sink current from the ISHARE bus).  
 The voltage of the bus would measure 8VDC for a single power module at 100% load; for two (2) modules sharing a common load the ISHARE bus voltage would be 4V for a perfect 50/50 current share scenario.
3. The VSB (Standby Output) output of the power module can also be connected in parallel; internal output isolation devices are provided however the combined available power is limited to that available from a single power module (3.3V @ 13.2W or 5V @ 20W; 12V @ 30W) irrespective of the number of modules connected in parallel.



MECHANICAL DIMENSIONS

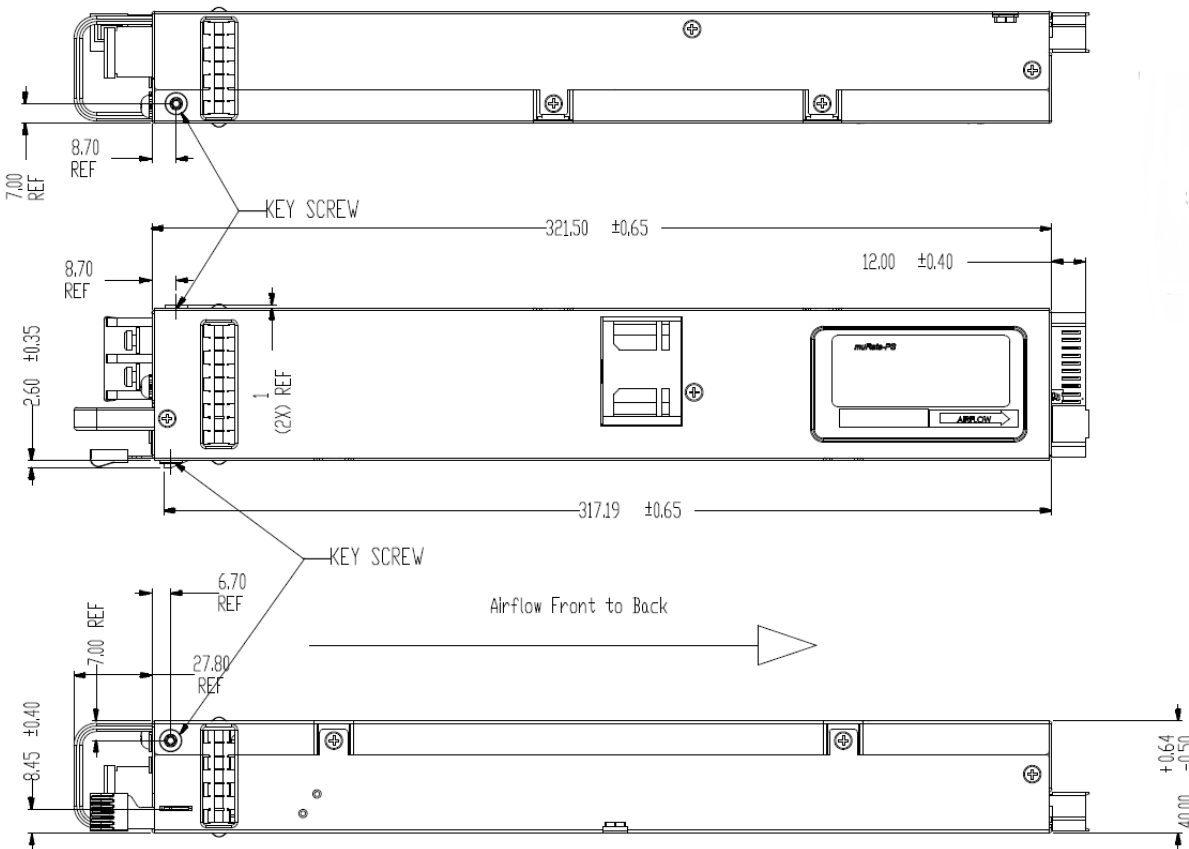

KEY SCREW DIMENSIONS

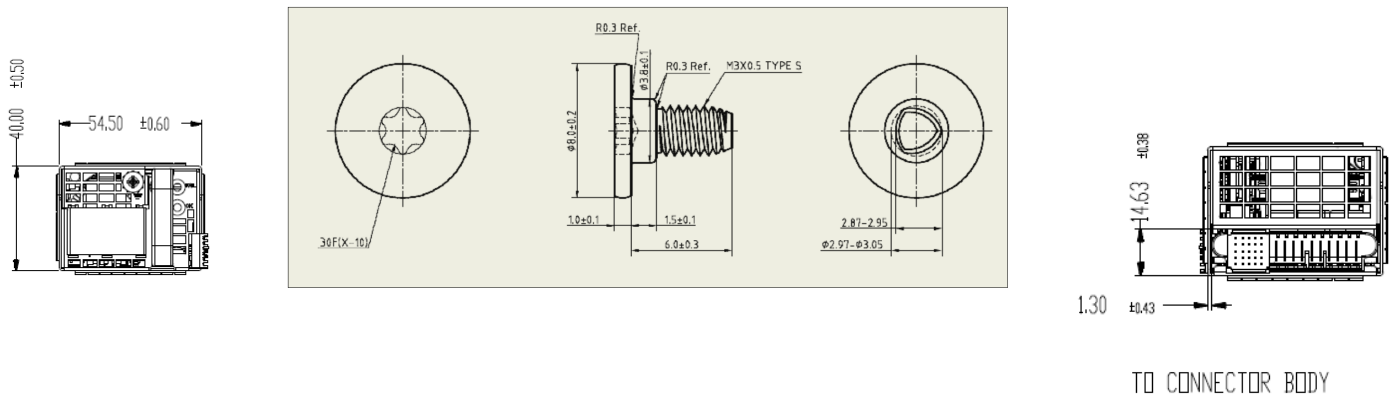

1. Input Terminal Block is a Dinkle Enterprise DT-7C-B14W-02
2. Dimensions: 1.57" x 12.66" x 2.15" (40.0 x 321.5mm x 54.5mm)
3. Safety earth/ground connection via separate dedicated M4 pan head screw (located above terminal block)
4. This drawing is a graphical representation of the product and may not show all fine details.
5. Reference File: D1U54-D-1500-12-HC3C (M1930)\_Drawing for Product Datasheet\_20171124\_DL

| OPTIONAL ACCESSORIES                           |                |
|--|----------------|
| Description                                    | Part Number    |
| D1U54P-12-CONC Output Interface Connector Card | D1U54P-12-CONC |

| APPLICATION NOTES |  |   |
|-------------------|--|---|
| Document Number   | Description                                    | Link  |
| ACAN-64           | D1U54P-12-CONC Output Interface Connector Card | <a href="http://power.murata.com/datasheet/?data/apnotes/acan-64.pdf">http://power.murata.com/datasheet/?data/apnotes/acan-64.pdf</a> |
| ACAN-67           | D1U54-D-12 Communications Protocol             | <a href="http://power.murata.com/datasheet/?data/apnotes/acan-67.pdf">http://power.murata.com/datasheet/?data/apnotes/acan-67.pdf</a> |

Murata Power Solutions, Inc.  
 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.  
 ISO 9001 and 14001 REGISTERED



**This product is subject to the following operating requirements and the Life and Safety Critical Application Sales Policy:**

Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2016 Murata Power Solutions, Inc.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Murata\(村田\)](#)