

To \_\_\_\_\_

No. A767-040403M-01

Date 3rd Apr. '04

Type No.  
**PRDA2**

Data Sheet

<b>PCS1900 Rx SAW Filter</b>	
Application	: Rx Filter for PCS1900
Center Frequency	: 1960MHz
Size	: 2.0x1.4mm, 5pin-layout
Impedance	: 50-50ohms unbalance-unbalance
Part No.	: EFCH1960TCD1

Issued *A. Tsunekawa*  
Check *K. Nishimura*

CIRCUIT COMPONENTS BUSINESS UNIT  
**MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD**  
KADOMA, OSAKA, JAPAN

**PCS1900 Rx SAW Filter**

----- Unbalanced input and unbalanced output -----

Part No. :

Design No. : T1960T5D2

Parameter	Frequency	Your request			Our Specification			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Passband					1930 ... 1990			MHz
Insertion loss	1930 ... 1990MHz					1.7	2.8	dB
Ripple in passband	1930 ... 1990MHz					0.6	1.7	dB
Attenuation	Att1	DC ... 1830MHz				29	36	dB
	Att2	1830... 1910MHz				13	16	dB
	Att3	2010 ... 2070MHz				13	17	dB
	Att4	2070 ... 2500MHz				26	28	dB
	Att5	2500 ... 4000MHz				24	28	dB
	Att6	4000 ... 6000MHz				20	38	dB
VSWR	Input	1930... 1990MHz				2.0	2.2	
	Output	1930 ... 1990MHz				2.0	2.2	
Input impedance(Single ended)					50			Ohm
Output impedance(Single ended)					50			Ohm
Maximum drive level							15	dBm
Maximum DC voltage							5	V
ESD							50	V
Operating temperature					-10		+80	deg. C
Storage temperature					-40		+85	deg. C



# PCS1900 Rx SAW Filter

----- Unbalanced input and unbalanced output -----

Part No. :

Design No. : T1960T5D2

Jig Loss = 0.2dB

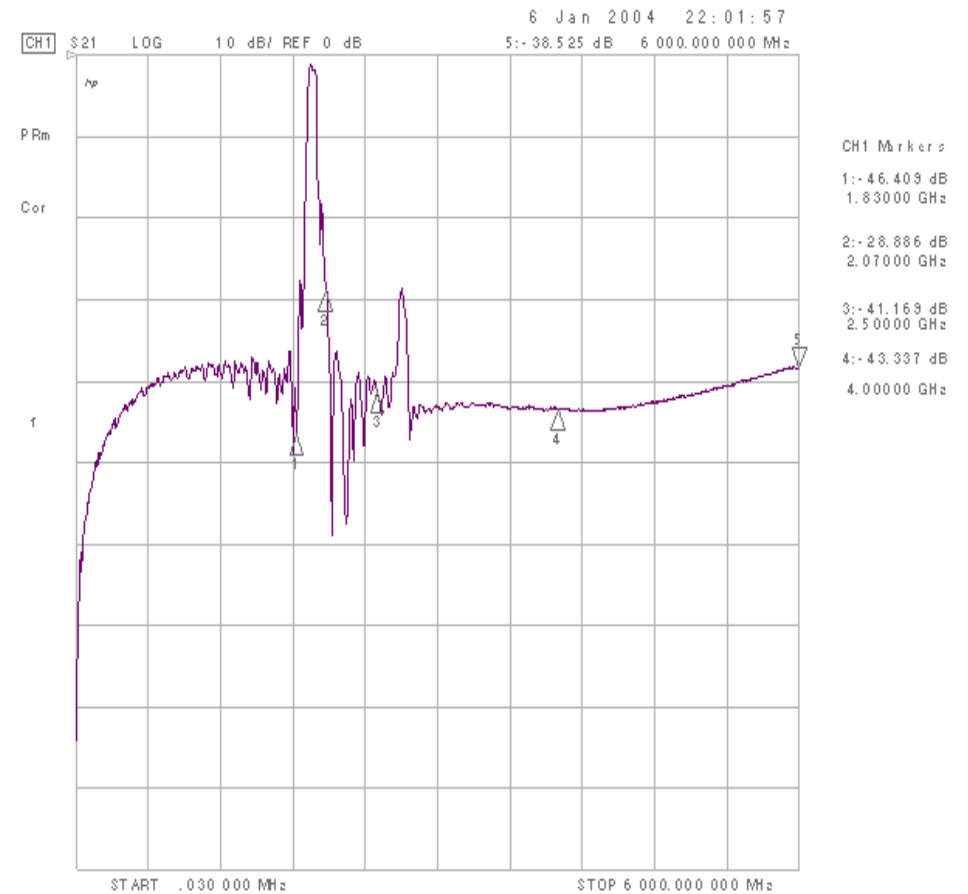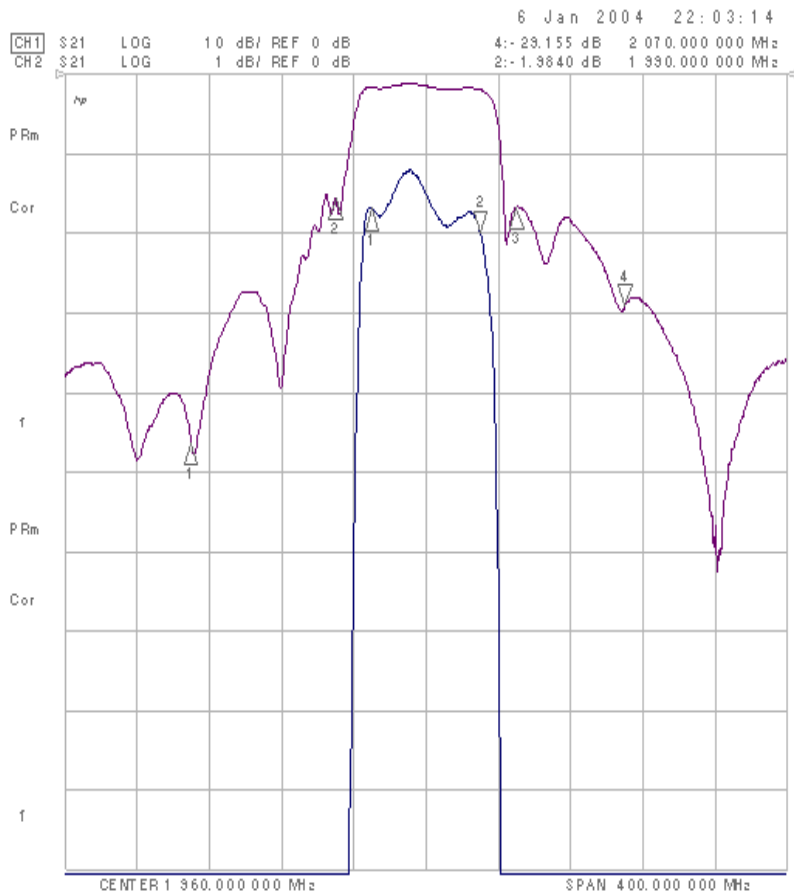


# PCS1900 Rx SAW Filter

----- Unbalanced input and unbalanced output -----

Part No. :


Design No. : T1960T5D2

Jig Loss = 0.2dB

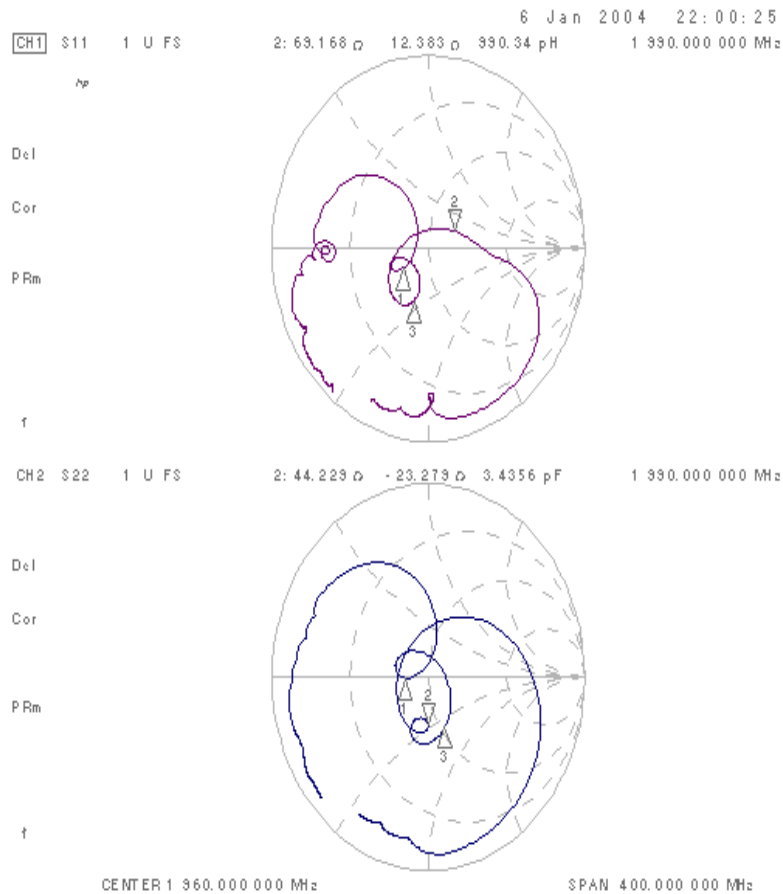

CH1 Markers  
1: 35.445  $\rho$   
-7.5463  $\rho$   
1.93000 GHz  
3: 36.119  $\rho$   
-21.438  $\rho$   
1.96000 GHz

CH2 Markers  
1: 37.051  $\rho$   
-417.97 m $\rho$   
1.93000 GHz  
3: 53.303  $\rho$   
-29.773  $\rho$   
1.96000 GHz

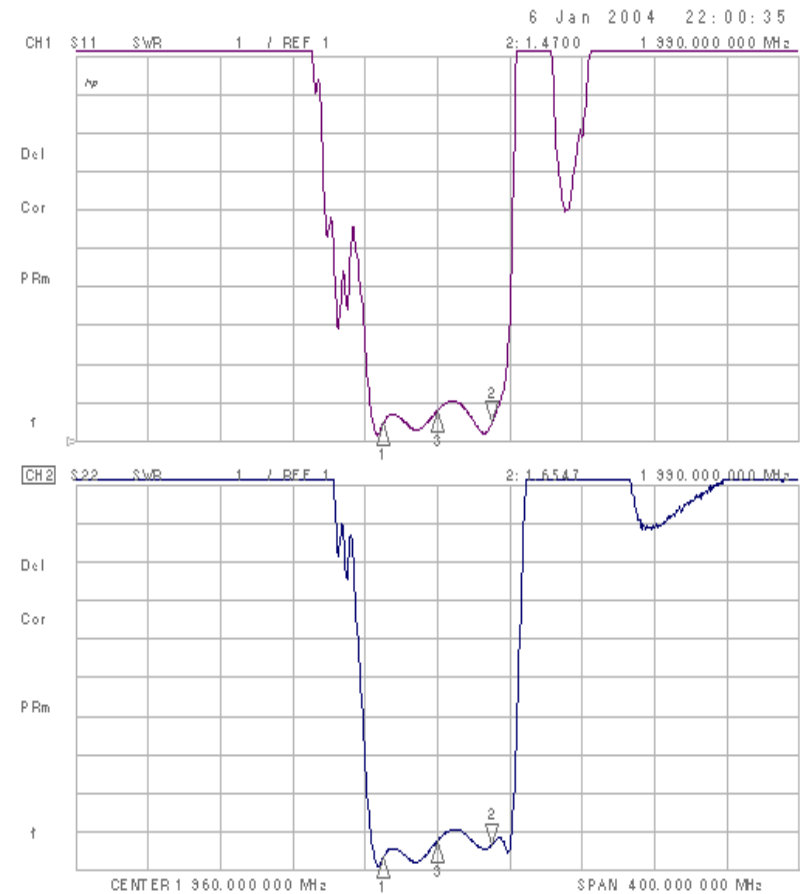




CH1 Markers  
1: 1.4726  
1.93000 GHz  
3: 1.8110  
1.96000 GHz

CH2 Markers  
1: 1.3500  
1.93000 GHz  
3: 1.7743  
1.96000 GHz

THIRD ANGLE PROJECTION

Tolerance : +/-0.05

*Under Development*

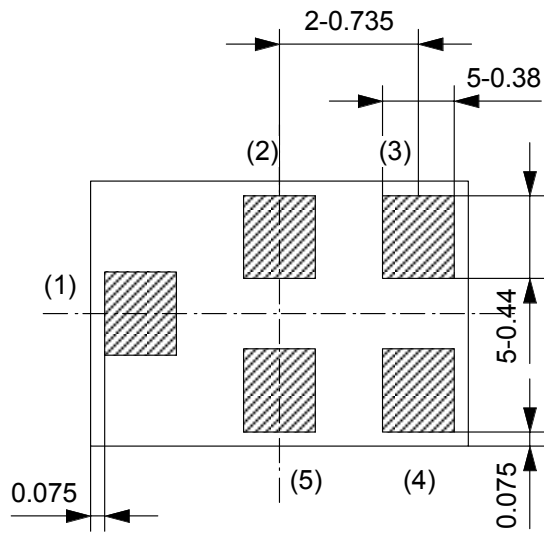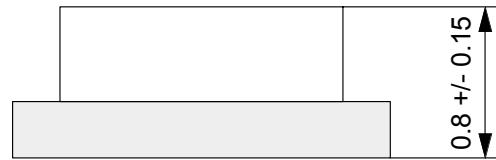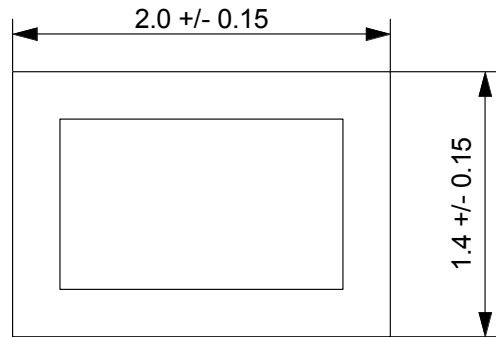

- (1) Input
- (2) GND
- (3) GND
- (4) Output
- (5) GND

**Note :**  
The design manufacturing process,  
and Specification of this device  
are subject to change without  
notice.

UNLESS OTHERWISE SPECIFIED		
BASIC DIMENSIONS		TOLERANCE
UP TO	INCL	
TO	INCL	
TO	INCL	
TO	INCL	
ABOVE		

--	--	--

ISSUE	REVISIONS	DATE
MATERIAL	FINISH	SCALE
DESIGN		
DRAW		
CHECK		
APPROVAL		
DRAWING NO.		

DO NOT SCALE DRAWING


REVISIONS INDICATED BY Δ

ALL DIMENSIONS ARE IN MILLIMETERS

NAME	TYPE NO.
SAW Filter	

CERAMIC BUSINESS UNIT, LCR DEVICE COMPANY  
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD.  
KADOMA, OSAKA, JAPAN

THIRD ANGLE PROJECTION

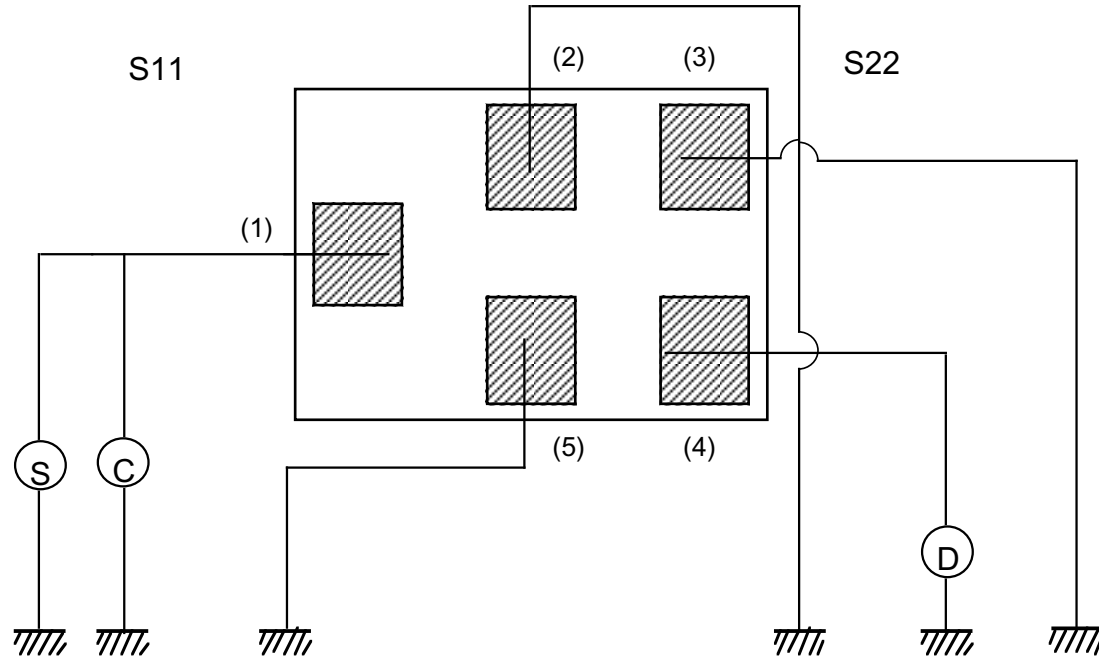

0 Level

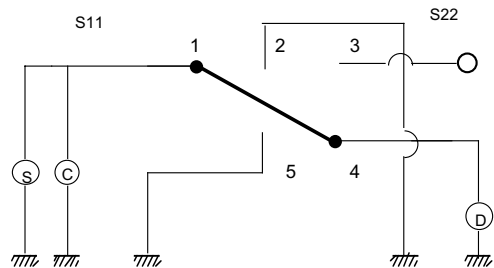


Fig. 2

S : Standard Signal Generator  
(Output Impedance 50 ohm)  
C : Frequency Counter  
D : Detector  
(Input Impedance 50 ohm)

UNLESS OTHERWISE SPECIFIED

BASIC DIMENSIONS		TOLERANCE
UP TO	INCL	
TO	INCL	
TO	INCL	
TO	INCL	
ABOVE		

--	--	--

ISSUE	REVISIONS		DATE
MATERIAL	FINISH	SCALE	
DESIGN			
DRAW			
CHECK			
APPROVAL			
DRAWING NO.			

NAME	TYPE NO.
SAW filter	

CERAMIC BUSINESS UNIT , LCR DEVICE COMPANY  
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD.  
KADOMA, OSAKA, JAPAN

DO NOT SCALE DRAWING      REVISIONS INDICATED BY      ALL DIMENSIONS ARE IN MILLIMETERS



单击下面可查看定价，库存，交付和生命周期等信息

[>>Panasonic\(松下\)](#)