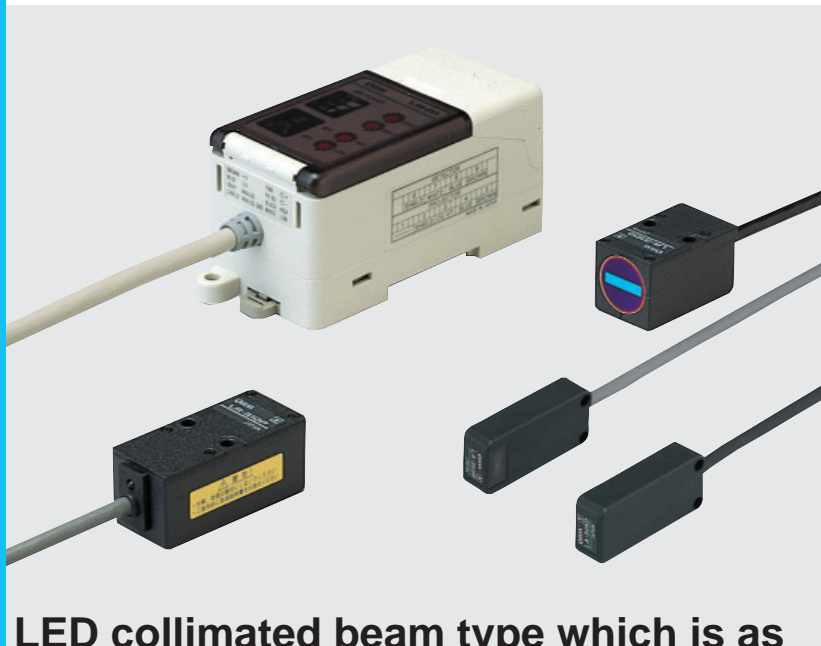


# LA-300 SERIES

Related Information

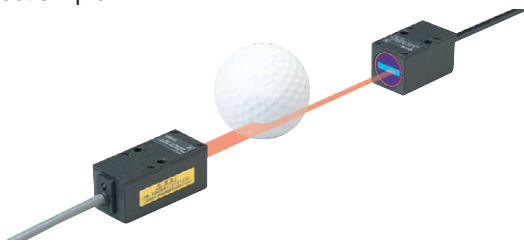
- General terms and conditions..... P.1
- Sensor selection guide .....P.11~ / P.833~
- CA2.....P.793~
- General precautions..... P.1027



**LED collimated beam type which is as accurate as a laser sensor, but much safer**

### Safe red LED beam

Since a red LED, harmless to your eyes, has been incorporated as the beam source, you are free from strict laser safety regulations. Moreover, due to the red LED beam source, the measuring spot is visible, which makes positioning of the object simple.



### Compact size

Its emitter and receiver are much smaller compared to those of the amplifier built-in type (LA-510). Hence, they can be installed even in a narrow space inside an automatic assembly machine, etc.

#### Long sensing range type / LA-310



- Emitter: W20 × H20 × D45 mm  
W0.787 × H0.787 × D1.772 in
- Receiver: W20 × H20 × D35 mm  
W0.787 × H0.787 × D1.378 in

#### Slim type / LA-305



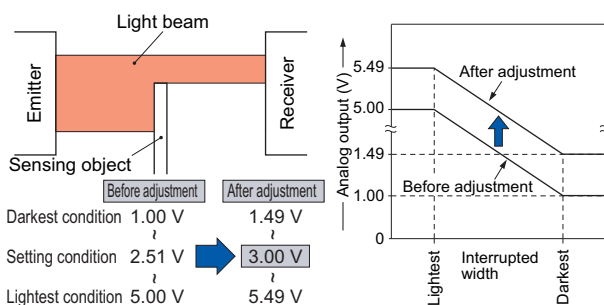
- Emitter: W18 × H40 × D10 mm  
W0.709 × H1.575 × D0.394 in
- Receiver: W18 × H40 × D10 mm  
W0.709 × H1.575 × D0.394 in

## FUNCTIONS

### Span & shift adjustment

For the analog output, in addition to the span adjustment function, a convenient shift function which enables the analog voltage to be shifted by ±0.5 V has been incorporated.

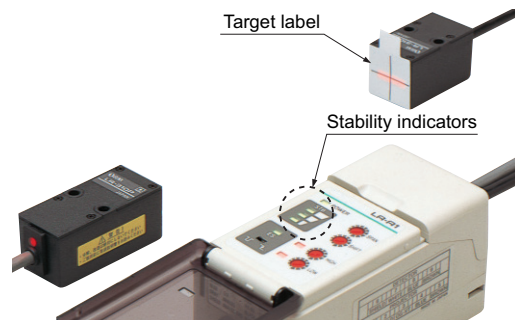
Example: To shift the analog voltage from 2.51 V to 3.00 V with a certain amount of beam interruption



## MOUNTING

### Simple beam alignment

Beam alignment is easy by using the target label (accessory). Further, the 3-stage stability indicators on the amplifier indicate the incident beam level at a glance.




- Selection Guide
- Laser Displacement
- HL-C2
- HL-C1
- LM10
- Magnetic Displacement
- GP-X
- GP-A
- Collimated Beam Sensors
- HL-T1
- LA-300
- LA
- Other Products


- FIBER SENSORS
- LASER SENSORS
- PHOTOELECTRIC SENSORS
- MICRO PHOTOELECTRIC SENSORS
- AREA SENSORS
- SAFETY COMPONENTS
- PRESSURE SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC CONTROL DEVICES
- LASER MARKERS

ORDER GUIDE  
P.900SPECIFICATIONS  
P.901~I/O CIRCUIT DIAGRAMS  
P.903SENSING CHARACTERISTICS  
P.904PRECAUTIONS FOR PROPER USE  
P.904~DIMENSIONS  
P.905~**APPLICATIONS****Detecting unseated wafers**


Two sensors inspect vertical and lateral displacement of wafers.

**Inspecting burrs on workpieces**

If burrs are present, they increase the width of beam interruption.

**Detecting glass bottles**

Even clear glass bottles are reliably detected.

**ORDER GUIDE****Sensor heads**

Type	Appearance	Sensing range	Sensing width	Minimum sensing object	Model No. (Note)
Long sensing range		500 mm 19.685 in	10 mm 0.394 in	ø0.1 mm ø0.004 in opaque object	<b>LA-310</b>
Slim		300 mm 11.811 in	5 mm 0.197 in	ø0.05 mm ø0.002 in opaque object	<b>LA-305</b>


Order for the long sensing range type **LA-310** will be stopped by December, 2007.Note: The model No. with suffix "P" shown on the label affixed to the product is the emitter, "D" shown on the label is the receiver.  
(e.g.) Emitter of **LA-305**: **LA-305P**, Receiver of **LA-305**: **LA-305D****Amplifiers**

Type	Appearance	Model No.	Output
NPN output		<b>LA-A1</b>	NPN open-collector transistor (Comparative outputs) Analog voltage • Output voltage: 1 to 5 V
PNP output		<b>LA-A1P</b>	PNP open-collector transistor (Comparative outputs) Analog voltage • Output voltage: 1 to 5 V


Always use the sensor head and the amplifier together as a set.

**Accessories**

- **MS-LA3-1**  
(Sensor head mounting bracket for **LA-310**)  
(Note)

Two M3 (length 25 mm 0.984 in)  
screws with washers are attached.

- **MS-LA3-2**  
(Sensor head mounting bracket for **LA-305**)  
(Note)

Two M3 (length 15 mm 0.591 in)  
screws with washers are attached.

Note: 2 sets are required to mount the emitter / receiver.

FIBER  
SENSORSLASER  
SENSORSPHOTO-  
ELECTRIC  
SENSORSMICRO  
PHOTO-  
ELECTRIC  
SENSORSAREA  
SENSORSSAFETY  
COMPONENTSPRESSURE  
SENSORSINDUCTIVE  
PROXIMITY  
SENSORSPARTICULAR  
USE  
SENSORSSENSOR  
OPTIONSWIRE-  
SAVING  
SYSTEMSMEASURE-  
MENT  
SENSORSSTATIC  
CONTROL  
DEVICESLASER  
MARKERSSelection  
GuideLaser  
Displacement**HL-C2****HL-C1****LM10**Magnetic  
Displacement**GP-X****GP-A**Collimated  
Beam Sensors**HL-T1****LA-300****LA**Other  
Products

**OPTIONS****Digital panel controller**• **CA2-T2**

Designation	Model No.	Description
Digital panel controller (Note)	<b>CA2-T2</b>	<p>This is a very small controller which allows two independent threshold level settings.</p> <ul style="list-style-type: none"> <li>• Supply voltage: 24 V DC <math>\pm</math> 10 %</li> <li>• Output: NPN open-collector transistor</li> <li>• No. of inputs: 1 No. (sensor input)</li> <li>• Input range: 1 to 5 V DC</li> <li>• Main functions: Threshold value setting function, zero-adjust function, scale setting function, hysteresis setting function, start / hold function, auto-reference function, power supply ON-delay function, etc.</li> </ul>

Note: If analog voltage output of **LA-A1** or **LA-A1P** is shifted, the input range may be exceeded. In that case, use **CA2-T5** (input range -10 to +10 V). For further details, refer to p.793- for the ultra-compact digital panel controller **CA2** series.

**SPECIFICATIONS****Sensor heads**

Item	Type	Long sensing range	Slim
	Model No.	<b>LA-310</b>	<b>LA-305</b>
Applicable amplifiers		<b>LA-A1, LA-A1P</b>	
Beam width		10 mm <b>0.394 in</b>	5 mm <b>0.197 in</b>
Sensing range		500 mm <b>19.685 in</b>	300 mm <b>11.811 in</b>
Min. sensing object		$\varnothing$ 0.1 mm <b><math>\varnothing</math>0.004 in</b> opaque object	$\varnothing$ 0.05 mm <b><math>\varnothing</math>0.002 in</b> opaque object
Repeatability		Perpendicular to sensing axis: 0.01 mm <b>0.0004 in</b> or less	
Temperature characteristics		0.1 % F.S./ $^{\circ}$ C or less	0.2 % F.S./ $^{\circ}$ C or less
Emission indicator		Red LED (lights up when emitting)	—
Environmental resistance	Pollution degree	3 (Industrial environment)	
	Ambient temperature	0 to +40 $^{\circ}$ C <b>+32 to +104 <math>^{\circ}</math>F</b> (No dew condensation), Storage: -20 to +70 $^{\circ}$ C <b>-4 to +158 <math>^{\circ}</math>F</b>	
	Ambient humidity	35 to 85 % RH, Storage: 35 to 85 % RH	
	Ambient illuminance	Incandescent light: 10,000 lx at the light-receiving face	
	EMC	EN 61000-6-2, EN 61000-6-4	
	Voltage withstandability	1,000 V AC for one min. between all supply terminals connected together and enclosure	
	Insulation resistance	20 M $\Omega$ , or more, with 250 V DC megger between all supply terminals connected together and enclosure	
	Vibration resistance	10 to 150 Hz frequency, 0.75 mm <b>0.030 in</b> amplitude in X, Y and Z directions for two hours each	
Shock resistance	500 m/s <sup>2</sup> acceleration (50 G approx.) in X, Y and Z directions for three times each		
Emitting element	Red LED (Peak emission wavelength 670 nm <b>0.026 mil</b> , modulated)	Red LED (Peak emission wavelength 650 nm <b>0.026 mil</b> , modulated)	
Material	Enclosure: Die-cast zinc alloy Top face: Aluminum	Enclosure: Heat-resistant ABS Cover: Heat-resistant ABS, Front cover: Glass	
Cable	0.22 mm <sup>2</sup> 3-core composite cable, 2 m <b>6.562 ft</b> long	0.18 mm <sup>2</sup> 3-core composite cable, 2 m <b>6.562 ft</b> long	
Cable extension	Extension up to total 10 m <b>32.808 ft</b> is possible, for both emitter and receiver, with 0.22 mm <sup>2</sup> , or more, cable. (Shield wire must be extended with shield wire.)	Extension up to total 10 m <b>32.808 ft</b> is possible, for both emitter and receiver, with 0.18 mm <sup>2</sup> , or more, cable. (Shield wire must be extended with shield wire.)	
Net weight	Emitter: 110 g approx., Receiver: 100 g approx.	Emitter: 70 g approx., Receiver: 70 g approx.	
Accessories	<b>MS-LA3-1</b> (Sensor head mounting bracket): 1 set for emitter and receiver, Target label: 2 pcs.	<b>MS-LA3-2</b> (Sensor head mounting bracket): 1 set for emitter and receiver, Target label: 2 pcs.	

Order for the long sensing range type **LA-310** will be stopped by December, 2007.

Note: Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20  $^{\circ}$ C **+68  $^{\circ}$ F**.

**SPECIFICATIONS****Amplifiers**

Item	Type	NPN output type	PNP output type
	Model No.	LA-A1	LA-A1P
Applicable sensor heads	LA-310, LA-305		
Supply voltage	12 to 24 V DC $\pm$ 10 % Ripple P-P 10 % or less		
Current consumption	120 mA or less (including sensor heads)		
Comparative outputs (HIGH, LOW)		NPN open-collector transistor <ul style="list-style-type: none"> <li>Maximum sink current: 100 mA</li> <li>Applied voltage: 30 V DC or less (between comparative output and 0 V)</li> <li>Residual voltage: 1.5 V or less (at 100 mA sink current) 0.5 V or less (at 16 mA sink current)</li> </ul>	PNP open-collector transistor <ul style="list-style-type: none"> <li>Maximum source current: 100 mA</li> <li>Applied voltage: 30 V DC or less (between comparative output and +V)</li> <li>Residual voltage: 1.5 V or less (at 100 mA source current) 0.5 V or less (at 16 mA source current)</li> </ul>
	Utilization category	DC-12 or DC-13	
	Response time	0.5 ms or less	
	Output operation	HIGH output: ON when the received beam level is equal to or lower than HIGH (Over-dark) level LOW output: ON when the received beam level is equal to or higher than LOW (Under-dark) level	
	Short-circuit protection	Incorporated	
Analog output		Analog voltage <ul style="list-style-type: none"> <li>Output voltage: 1 V (Darkest) to 5 V (Lightest)</li> <li>Output impedance: 75 <math>\Omega</math></li> </ul>	
	Slew rate	8 V/ms or more	
	Temperature characteristics	0.05 % F.S./ $^{\circ}$ C or less	
External synchronization	Incorporated (Either gate trigger or edge trigger is selectable)		
Indicators	Power	Green LED (lights up when the power is ON)	
	Stable incident beam	Three green LEDs (light up in three stages in proportion to the amount of beam received)	
	Operation	Two orange LEDs (light up when High and Low comparative outputs are ON, respectively)	
	External synchronization	Green LED (lights up when the comparative outputs are effective)	
Adjusters	Span	15-turn adjuster sets the span for the analog output voltage	
	Shift	15-turn adjuster sets the offset for the analog output voltage	
	HIGH (Over-dark) level	15-turn adjuster sets the HIGH output threshold level (Over-dark level)	
	LOW (Under-dark) level	15-turn adjuster sets the LOW output threshold level (Under-dark level)	
Environmental resistance	Pollution degree	3 (Industrial environment)	
	Ambient temperature	0 to +50 $^{\circ}$ C +32 to +122 $^{\circ}$ F (No dew condensation), Storage: -20 to +70 $^{\circ}$ C -4 to +158 $^{\circ}$ F	
	Ambient humidity	35 to 85 % RH, Storage: 35 to 85 % RH	
	EMC	EN 61000-6-2, EN 61000-6-4	
	Voltage withstandability	1,000 V AC for one min. between all supply terminals connected together and enclosure	
	Insulation resistance	20 M $\Omega$ , or more, with 250 V DC megger between all supply terminals connected together and enclosure	
	Vibration resistance	10 to 150 Hz frequency, 0.75 mm 0.030 in amplitude in X, Y and Z directions for two hours each	
Shock resistance	500 m/s <sup>2</sup> acceleration (50 G approx.) in X, Y and Z directions for three times each		
Material	Enclosure: Heat-resistant ABS, Terminal cover: Heat-resistant ABS, Front cover: Polycarbonate		
Cable	0.22 mm <sup>2</sup> (shield wire: 0.15 mm <sup>2</sup> ) 7-core composite cabtyre cable, 2 m 6.562 ft long		
Cable extension (Note 2)	Extension up to total 50 m 164.042 ft is possible with 0.22 mm <sup>2</sup> , or more, cable. (Shield wire must be extended with 0.15 mm <sup>2</sup> , or more, shield wire.)		
Weight	Net weight: 200 g approx.		
Accessory	Adjusting screwdriver: 1 pc.		

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20  $^{\circ}$ C +68  $^{\circ}$ F.

2) This product is CE compliant and complies with EMC directives. EN 61000-6-2 is the applicable standard that covers immunities relating to use of this product, but in order to comply with this standard, the following conditions must be satisfied.

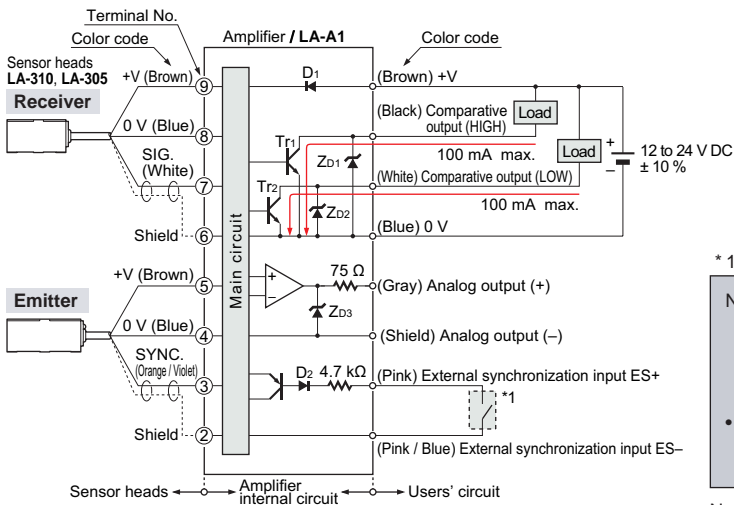
**Conditions**

- The amplifier should be connected less than 10 m 32.808 ft from the power supply.
- The signal line to connect with the amplifier should be less than 30 m 98.425 ft.

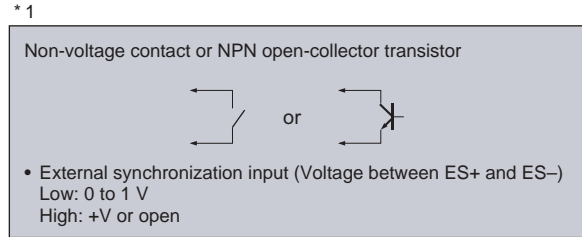
- FIBER SENSORS
- LASER SENSORS
- PHOTO-ELECTRIC SENSORS
- MICRO PHOTO-ELECTRIC SENSORS
- AREA SENSORS
- SAFETY COMPONENTS
- PRESSURE SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC CONTROL DEVICES
- LASER MARKERS

**I/O CIRCUIT DIAGRAMS**

**LA-A1** NPN output type

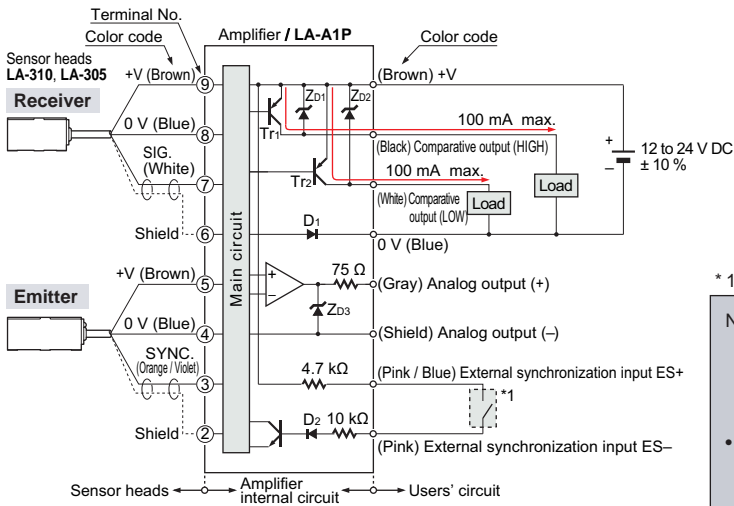


Symbols ... D1: Reverse supply polarity protection diode  
 D2: Input protection diode  
 ZD1, ZD2, ZD3: Surge absorption zener diode  
 Tr1, Tr2: NPN output transistor

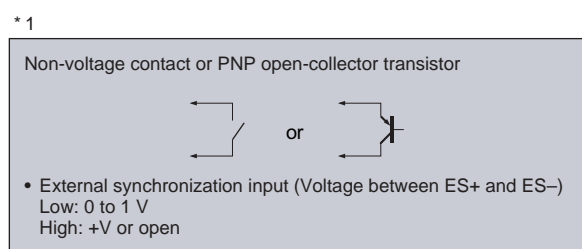


Notes: 1) When ES+ (pink) and ES- (pink / blue) of external synchronization input are connected, both HIGH and LOW comparative outputs are triggered in the mode selected by the external synchronization selection switch.  
 If the external synchronization function is not used, always short-circuit ES+ and ES- and set the external synchronization selection switch to gate trigger.  
 2) To use the analog output (gray), choose a device with an input impedance of 1 MΩ, or more, and connect the shield wire of the analog output to 0 V (common input) of the device.  
 3) Insulate all unused wires individually to avoid miscontact.

**LA-A1P** PNP output type



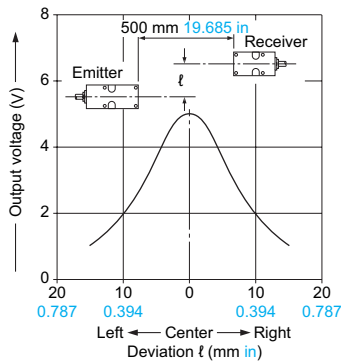
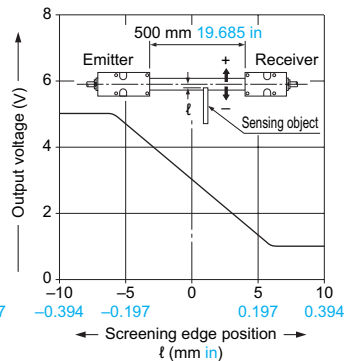
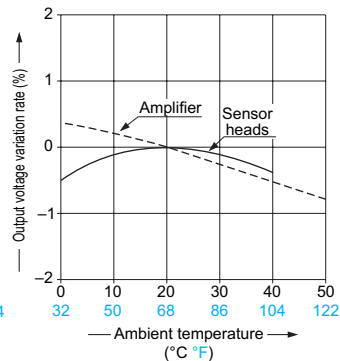
Symbols ... D1: Reverse supply polarity protection diode  
 D2: Input protection diode  
 ZD1, ZD2, ZD3: Surge absorption zener diode  
 Tr1, Tr2: PNP output transistor



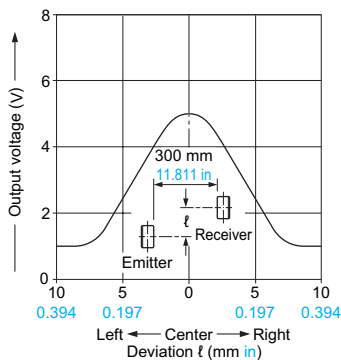
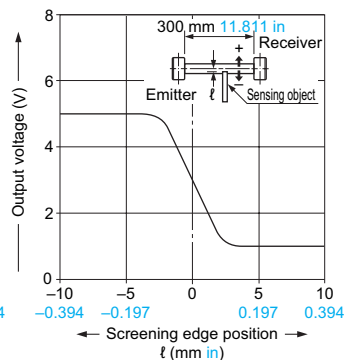
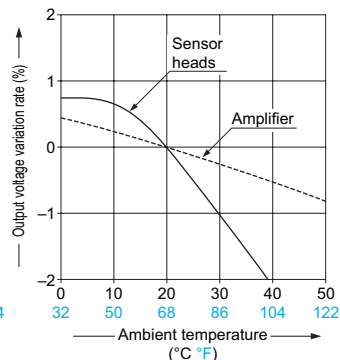
Notes: 1) When ES+ (pink / blue) and ES- (pink) of external synchronization input are connected, both HIGH and LOW comparative outputs are triggered in the mode selected by the external synchronization selection switch.  
 If the external synchronization function is not used, always short-circuit ES+ and ES- and set the external synchronization selection switch to gate trigger.  
 2) To use the analog output (gray), choose a device with an input impedance of 1 MΩ, or more, and connect the shield wire of the analog output to 0 V (common input) of the device.  
 3) Insulate all unused wires individually to avoid miscontact.

**SENSING CHARACTERISTICS (TYPICAL)****LA-310**

Long sensing range type

**Correlation between transverse deviation and output voltage****Correlation between interrupted beam width and output voltage****Correlation between ambient temperature and output voltage variation rate****LA-305**

Slim type

**Correlation between transverse deviation and output voltage****Correlation between interrupted beam width and output voltage****Correlation between ambient temperature and output voltage variation rate****PRECAUTIONS FOR PROPER USE**

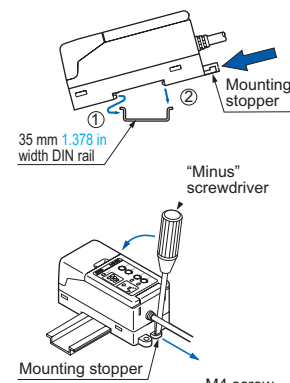
Refer to p.1027 for general precautions.




- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.

**Mounting****Amplifier****<Mounting on DIN rail>**



- ① Make sure that the mounting stopper is latched inside. Hook the front side of the controller mounting section on the 35 mm 1.378 in width DIN rail.
  - ② Snap the controller down on the 35 mm 1.378 in width DIN rail.
- \*To remove, insert a "minus" screwdriver into the mounting stopper and pull out.

**<Mounting with screws>**


- Use two commercially available M4 screws. The tightening torque should be 1.2 N·m or less.

**Sensor heads**


- The projected LED beam has a directionality. Hence, take care of emitter and receiver mounting direction.

**LA-310****LA-305**

- The tightening torque should be 0.5 N·m or less.

**LA-310**

Sensor head mounting bracket for LA-310 MS-LA3-1 (Accessory)

**LA-305**

Sensor head mounting bracket for LA-305 MS-LA3-2 (Accessory) (Note)

Note: When carrying out high accuracy sensing with LA-305, install the mounting bracket on the front face as shown in the above figure.

FIBER SENSORS  
LASER SENSORS  
PHOTO-ELECTRIC SENSORS  
MICRO PHOTO-ELECTRIC SENSORS  
AREA SENSORS  
SAFETY COMPONENTS  
PRESSURE SENSORS  
INDUCTIVE PROXIMITY SENSORS  
PARTICULAR USE SENSORS  
SENSOR OPTIONS  
WIRE- SAVING SYSTEMS  
MEASUREMENT SENSORS  
STATIC CONTROL DEVICES  
LASER MARKERS

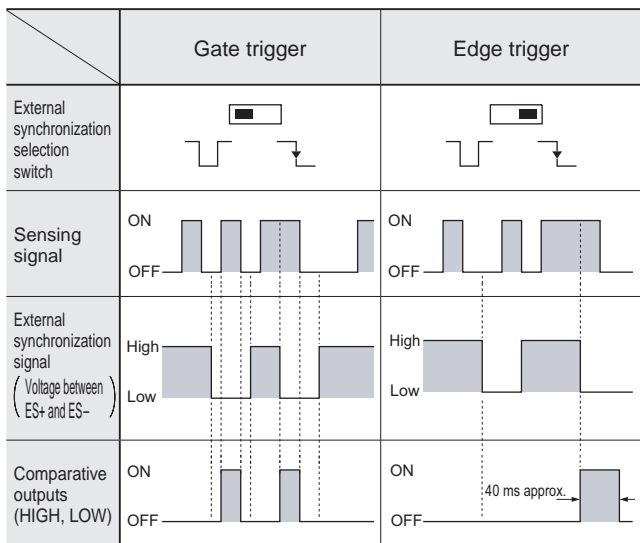
Selection Guide  
Laser Displacement  
HL-C2  
HL-C1  
LM10  
Magnetic Displacement  
GP-X  
GP-A  
Collimated Beam Sensors  
HL-T1  
LA-300  
LA  
Other Products

**PRECAUTIONS FOR PROPER USE**

Refer to p.1027 for general precautions.

**External synchronization**

- The external synchronization input controls the timing or the effective duration of the two comparative outputs. Either edge or gate trigger is selectable.



External synchronization input signal: Low ... 0 to 1 V, High ... +V or open

Note: If external synchronization is not used, set the external synchronization selection switch on "Gate trigger" and short-circuit the external synchronization inputs (ES+ and ES-).

**Others**

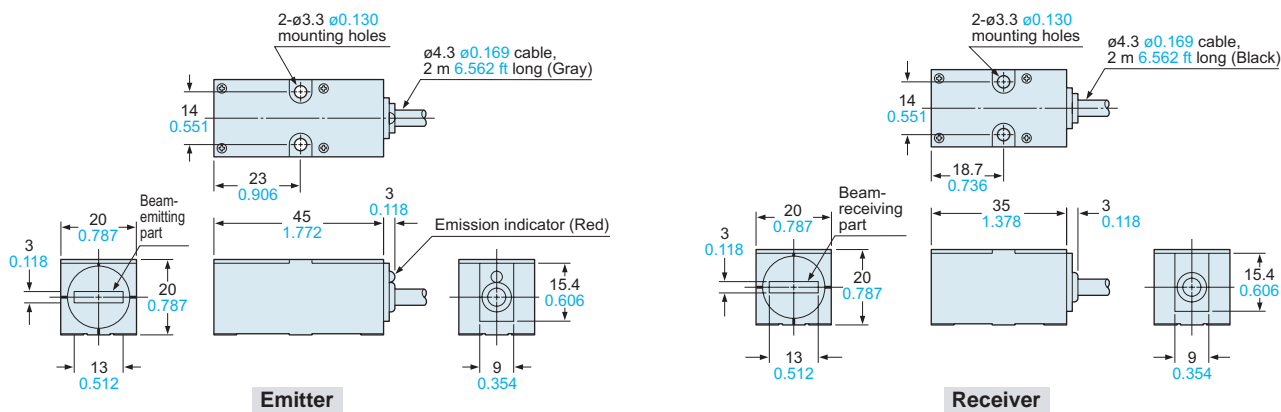
- The sensor's output is proportional to the amount of the LED light received. Since there is some variation in the light intensity at the center and the periphery of the sensing area, take care that "output = dimension" may not hold.
- For stable operation, use the sensor 10 min., or more, after switching on the power supply.
- Keep the front faces of the sensor heads free of dust, dirt, metal powder, etc. Should the faces be covered with it, deteriorating its performance, wipe them clean with a soft cloth or blown air.

**DIMENSIONS (Unit: mm in)**

The CAD data in the dimensions can be downloaded from the SUNX website.

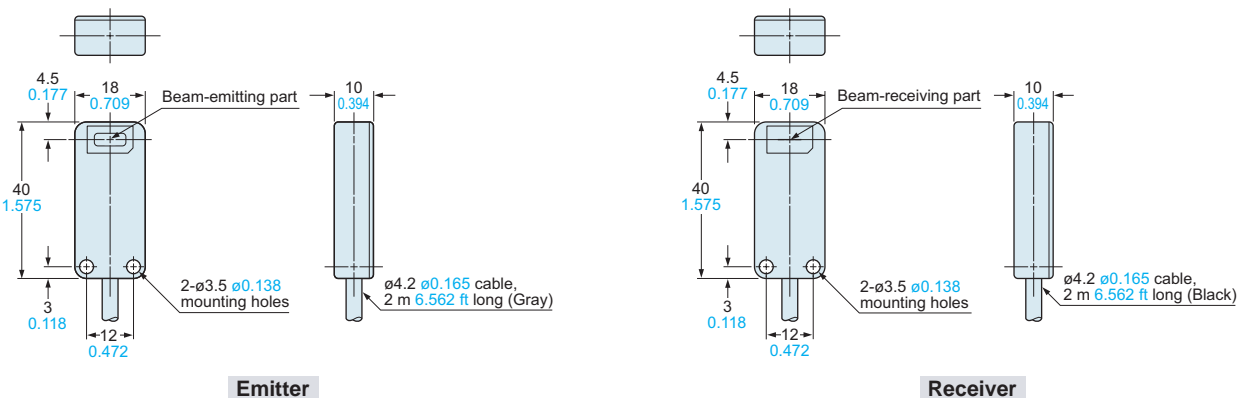
**LA-310**

**Sensor head**



**LA-305**

**Sensor head**

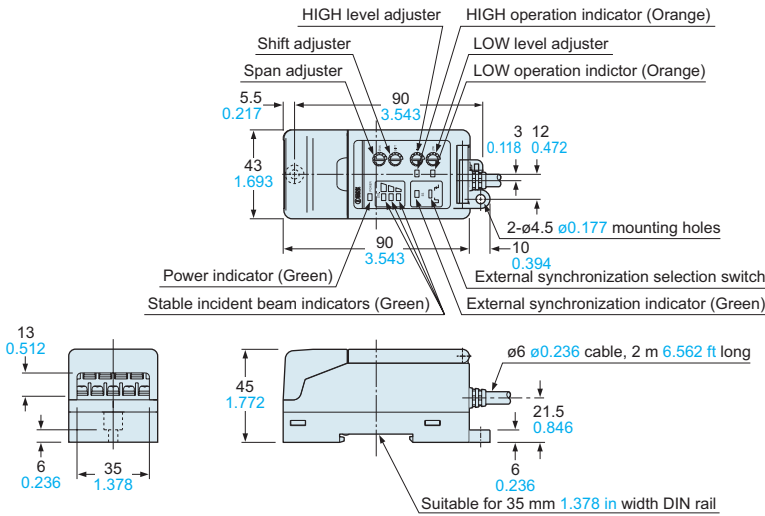


**DIMENSIONS (Unit: mm in)**

The CAD data in the dimensions can be downloaded from the SUNX website.

LA-A1 LA-A1P

Amplifier

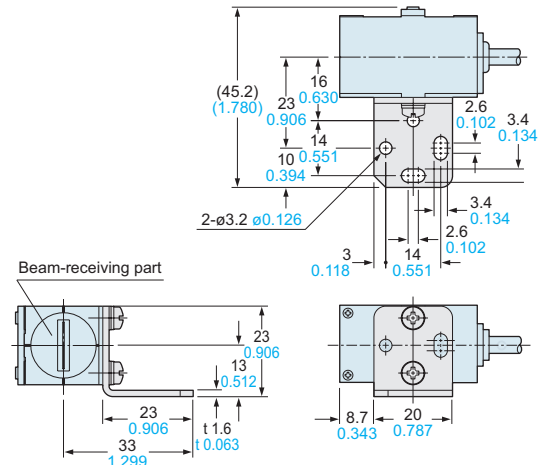
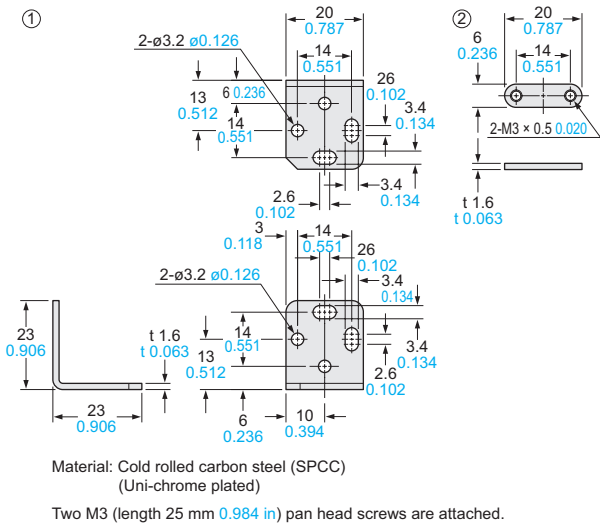


MS-LA3-1

Sensor head mounting bracket for LA-310 (Accessory for LA-310)

**Assembly dimensions**

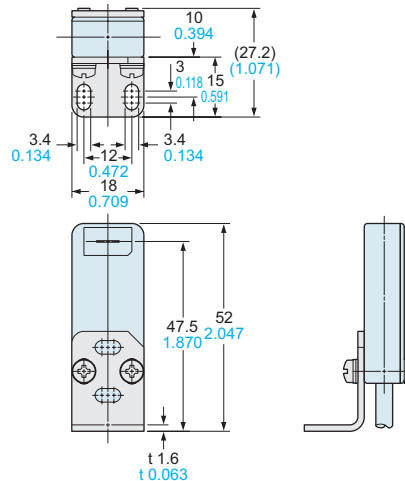
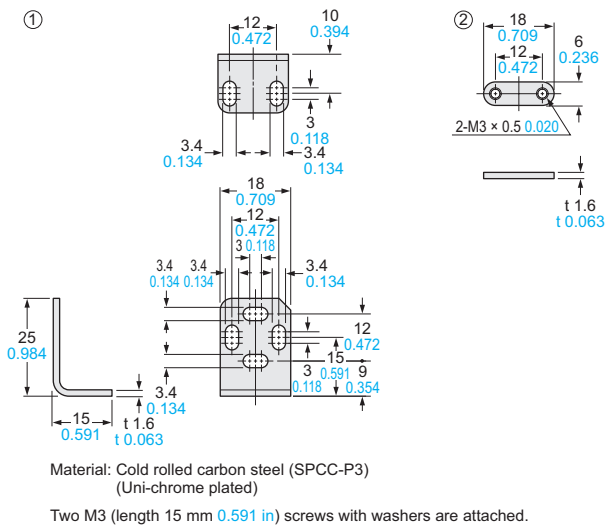
Mounting drawing with the receiver



MS-LA3-2

Sensor head mounting bracket for LA-305 (Accessory for LA-305)

**Assembly dimensions**



- FIBER SENSORS
- LASER SENSORS
- PHOTO-ELECTRIC SENSORS
- MICRO PHOTO-ELECTRIC SENSORS
- AREA SENSORS
- SAFETY COMPONENTS
- PRESSURE SENSORS
- INDUCTIVE PROXIMITY SENSORS
- PARTICULAR USE SENSORS
- SENSOR OPTIONS
- WIRE-SAVING SYSTEMS
- MEASUREMENT SENSORS
- STATIC CONTROL DEVICES
- LASER MARKERS
- Selection Guide
- Laser Displacement
- HL-C2
- HL-C1
- LM10
- Magnetic Displacement
- GP-X
- GP-A
- Collimated Beam Sensors
- HL-T1
- LA-300
- LA
- Other Products



单击下面可查看定价，库存，交付和生命周期等信息

[>>Panasonic\(松下\)](#)