



CMOS/ 1.8V to 5.0V/ 5.0×3.2mm



RoHS Compliant

**Features**

- Wide operating voltage range 1.6 to 5.5V
- ±25×10<sup>-6</sup> available
- Highly reliable with seam welding
- Miniature ceramic package
- CMOS output

**Table 1**

Freq. Code	Tol. × 10 <sup>-6</sup>	Operating Temperature Range (°C)	Note
0	± 50		Standard specifications
S	± 30	-10 to +70	Please contact us for available frequencies.
U	± 25		
F	±100	-40 to +85	
G	± 50	-40 to +105	
6	± 50	-40 to +105	

**How to Order**

KC5032A 25.0000 C M □ E 00  
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series
- ② Output Frequency
- ③ Output Type (CMOS)
- ④ Supply Voltage (1.8V, 2.5V, 3.3V, 5V Compatible)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/ INH Function (45/ 55%, Stand-by)
- ⑦ Individual Specification (STD Specification is "00")  
Packaging (Tape & Reel 1000 pcs./ reel)


**Specifications**

Item	Symbol	Conditions	Min.	Max.	Units	
Output Frequency Range	fo		1.8	50	MHz	
Frequency Tolerance	f <sub>tol</sub>	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @25°C), Shock and vibration	Op. Temp.: -40 to +85°C	-100	+100	×10 <sup>-6</sup>
			Op. Temp.: -10 to +70°C/ -40 to +85°C/ -40 to +105°C	-50	+50	
			Op. Temp.: -10 to +70°C	-30	+30	
Storage Temperature Range	T <sub>stg</sub>		-55	+125	°C	
Operating Temperature Range	T <sub>use</sub>	Standard Specification	-10	+70	°C	
		Extend (Option)	-40	+85		
Max. Supply Voltage	—		-40	+105		
Supply Voltage	V <sub>CC</sub>		-0.6	+6.5	V	
Current Consumption (Loaded) (1.6<V <sub>CC</sub> ≤2.0V)	I <sub>CC</sub>	1.8≤fo≤20MHz	—	3.5	mA	
		20<fo≤40MHz	—	4.5		
		40<fo≤50MHz	—	5.0		
Current Consumption (Loaded) (2.0<V <sub>CC</sub> ≤2.8V)	I <sub>CC</sub>	1.8≤fo≤20MHz	—	4.0	mA	
		20<fo≤40MHz	—	5.0		
		40<fo≤50MHz	—	6.0		
Current Consumption (Loaded) (2.8<V <sub>CC</sub> ≤3.63V)	I <sub>CC</sub>	1.8≤fo≤20MHz	—	5.0	mA	
		20<fo≤40MHz	—	6.0		
		40<fo≤50MHz	—	7.0		
Current Consumption (Loaded) (3.63<V <sub>CC</sub> ≤5.5V)	I <sub>CC</sub>	1.8≤fo≤20MHz	—	7.0	mA	
		20<fo≤40MHz	—	8.0		
		40<fo≤50MHz	—	9.5		
Stand-by Current	I <sub>std</sub>		—	10	μA	
Symmetry	SYM	@50% V <sub>CC</sub>	45	55	%	
		1.6≤V <sub>CC</sub> ≤2V	—	8		
Rise/ Fall Time (10% V <sub>CC</sub> to 90% V <sub>CC</sub> Maximum Loaded)	tr/ tf	2<V <sub>CC</sub> ≤2.8V	—	7	ns	
		2.8<V <sub>CC</sub> ≤3.63V	—	6		
		4.5≤V <sub>CC</sub> ≤5.5V	—	5		
			—	5		
Low Level Output Voltage	V <sub>OL</sub>	I <sub>OL</sub> = 4mA	—	10% V <sub>CC</sub>	V	
High Level Output Voltage	V <sub>OH</sub>	I <sub>OH</sub> = -4mA	90% V <sub>CC</sub>	—	V	
Output Load	L <sub>CMOS</sub>	1.6≤V <sub>CC</sub> ≤5.5V	—	15	pF	
Input Voltage Range	V <sub>IN</sub>		0	V <sub>CC</sub>	V	
Low Level Input Voltage	V <sub>IL</sub>		—	30% V <sub>CC</sub>	V	
High Level Input Voltage	V <sub>IH</sub>		70% V <sub>CC</sub>	—	V	
Disable Time	t <sub>dis</sub>		—	150	ns	
Enable Time	t <sub>ena</sub>		—	5	ms	
Start-up Time	t <sub>str</sub>	@Minimum operating voltage to be 0 sec.	—	10	ms	
1 Sigma Jitter	J <sub>Sigma</sub>	Measured with Wavecrest SIA-3000	1.8≤fo≤40MHz	—	8	ps
			40<fo≤50MHz	—	5	
Peak to Peak Jitter	J <sub>PK-PK</sub>	Measured with Wavecrest SIA-3000	1.8≤fo≤40MHz	—	80	ps
			40<fo≤50MHz	—	50	

Note: All electrical characteristics are defined at the maximum load and operating temperature range. Please contact us for inquiry about operating temperature range, available frequencies and other conditions.


**Dimensions**

(Unit: mm)

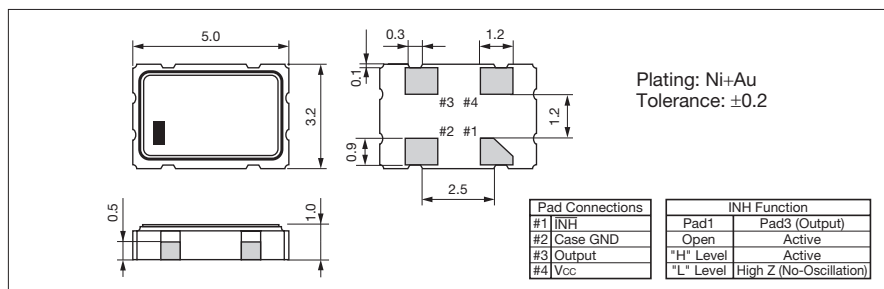

**Recommended Land Pattern**

(Unit: mm)

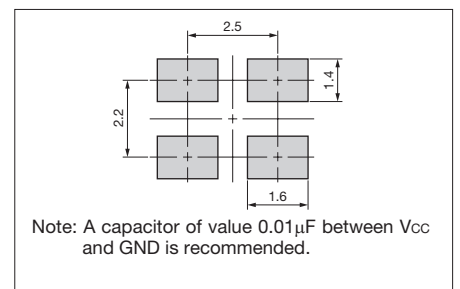

单击下面可查看定价，库存，交付和生命周期等信息

[>>Kyocera\(京瓷\)](#)