

## Low-Power, Slew-Rate-Limited RS-485/RS-422 Transceivers


### General Description

The MAX485 is low-power transceivers for RS-485 and RS-422 communication. IC contains one driver and one receiver. The driver slew rates of the MAX485 is not limited, allowing them to transmit up to 2.5Mbps.

These transceivers draw between 120µA and 500µA of supply current when unloaded or fully loaded with disabled drivers. All parts operate from a single 5V supply. Drivers are short-circuit current limited and are protected against excessive power dissipation by thermal shutdown circuitry that places the driver outputs into a high-impedance state. The receiver input has a fail-safe feature that guarantees a logic-high output if the input is open circuit. The MAX485 is designed for half-duplex applications.

### Features

- Low Quiescent Current: 300µA
- -7V to +12V Common-Mode Input Voltage Range
- Three-State Outputs
- 30ns Propagation Delays, 5ns Skew
- Full-Duplex and Half-Duplex Versions Available
- Operate from a Single 5V Supply
- Allows up to 32 Transceivers on the Bus
- Data rate: 2,5 Mbps
- Current-Limiting and Thermal Shutdown for Driver Overload Protection



**ABSOLUTE MAXIMUM RATINGS**

Supply Voltage ( $V_{CC}$ ) 12V  
 Control Input Voltage -0.5V to ( $V_{CC} + 0.5V$ )  
 Driver Input Voltage (DI) -0.5V to ( $V_{CC} + 0.5V$ )  
 Driver Output Voltage (A, B) -8V to +12.5V  
 Receiver Input Voltage (A, B) -8V to +12.5V  
 Receiver Output Voltage (RO) -0.5V to ( $V_{CC} + 0.5V$ )

Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ )  
 8-Pin Plastic DIP (derate 9.09mW/ $^\circ\text{C}$  above +70 $^\circ\text{C}$ ) 727mW  
 8-Pin SO (derate 5.88mW/ $^\circ\text{C}$  above +70 $^\circ\text{C}$ ) 471mW  
 Operating Temperature Ranges 0 $^\circ\text{C}$  to +70 $^\circ\text{C}$   
 Storage Temperature Range -65 $^\circ\text{C}$  to +160 $^\circ\text{C}$   
 Lead Temperature (soldering, 10sec) +300 $^\circ\text{C}$

**DC ELECTRICAL CHARACTERISTICS**

( $V_{CC} = 5V \pm 5\%$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.) (Notes 1, 2)

| PARAMETER   | SYMBOL          | CONDITIONS                                | MIN            | TYP | MAX     | UNITS         |
|---|-----------------|---|----------------|-----|---------|---------------|
| Differential Driver Output (no load)  | $V_{OD1}$       |   |                |     | 5       | V             |
| Differential Driver Output (with load)  | $V_{OD2}$       | R = 50 $\Omega$ (RS-422)                  | 2              |     |         | V             |
|   |                 | R = 27 $\Omega$ (RS-485), Figure 4        | 1.5            |     | 5       |               |
| Change in Magnitude of Driver Differential Output Voltage for Complementary Output States | $\Delta V_{OD}$ | R = 27 $\Omega$ or 50 $\Omega$ , Figure 4 |                |     | 0.2     | V             |
| Driver Common-Mode Output Voltage   | $V_{OC}$        | R = 27 $\Omega$ or 50 $\Omega$ , Figure 4 |                |     | 3       | V             |
| Change in Magnitude of Driver Common-Mode Output Voltage for Complementary Output States  | $\Delta V_{OD}$ | R = 27 $\Omega$ or 50 $\Omega$ , Figure 4 |                |     | 0.2     | V             |
| Input High Voltage  | $V_{IH}$        | DE, DI, $\overline{RE}$                   | 2.0            |     |         | V             |
| Input Low Voltage   | $V_{IL}$        | DE, DI, $\overline{RE}$                   |                |     | 0.8     | V             |
| Input Current   | $I_{IN1}$       | DE, DI, $\overline{RE}$                   |                |     | $\pm 2$ | $\mu\text{A}$ |
| Input Current (A, B)  | $I_{IN2}$       | DE = 0V;<br>$V_{CC} = 0V$ or 5.25V,       | $V_{IN} = 12V$ |     | 1.0     | mA            |
|   |                 |   | $V_{IN} = -7V$ |     | -0.8    |               |
| Receiver Differential Threshold Voltage   | $V_{TH}$        | $-7V \leq V_{CM} \leq 12V$                | -0.2           |     | 0.2     | V             |
| Receiver Input Hysteresis   | $\Delta V_{TH}$ | $V_{CM} = 0V$                             |                | 70  |         | mV            |
| Receiver Output High Voltage  | $V_{OH}$        | $I_o = -4mA$ , $V_{ID} = 200mV$           | 3.5            |     |         | V             |
| Receiver Output Low Voltage   | $V_{OL}$        | $I_o = 4mA$ , $V_{ID} = -200mV$           |                |     | 0.4     | V             |
| Three-State (high impedance) Output Current at Receiver                                   | $I_{OZR}$       | $0.4V \leq V_o \leq 2.4V$                 |                |     | $\pm 1$ | $\mu\text{A}$ |
| Receiver Input Resistance   | $R_{IN}$        | $-7V \leq V_{CM} \leq 12V$                |                |     |         | k $\Omega$    |

**DC ELECTRICAL CHARACTERISTICS (continued)**

 (V<sub>CC</sub> = 5V ±5%, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted.) (Notes 1, 2)

| PARAMETER                          | SYMBOL            | CONDITIONS                            | MIN | TYP | MAX | UNITS |
|------------------------------------|-------------------|---------------------------------------|-----|-----|-----|-------|
| No-Load Supply Current<br>(Note 3) | I <sub>CC</sub>   | DE = V <sub>CC</sub>                  |     | 500 | 900 |       |
|                                    |                   | RE = 0V or V <sub>CC</sub>            |     | 300 | 500 | μA    |
|                                    |                   | DE = 0V                               |     |     |     |       |
| Driver Short-Circuit Current,      |                   |                                       |     |     |     |       |
|                                    | I <sub>OSD1</sub> | -7V ≤ V <sub>O</sub> ≤ 12V (Note 4)   | 35  |     | 250 | mA    |
| V <sub>O</sub> = High              |                   |                                       |     |     |     |       |
| Driver Short-Circuit Current,      |                   |                                       |     |     |     |       |
|                                    | I <sub>OSD2</sub> | -7V ≤ V <sub>O</sub> ≤ 12V (Note 4)   | 35  |     | 250 | mA    |
| V <sub>O</sub> = Low               |                   |                                       |     |     |     |       |
| Receiver Short-Circuit Current     | I <sub>OSR</sub>  | 0V ≤ V <sub>O</sub> ≤ V <sub>CC</sub> | 7   |     | 95  | mA    |

**SWITCHING CHARACTERISTICS**

 (V<sub>CC</sub> = 5V ±5%, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted.) (Notes 1, 2)

| PARAMETER  | SYMBOL            | CONDITIONS   | MIN | TYP | MAX | UNITS |
|--|-------------------|--|-----|-----|-----|-------|
| Driver Input to Output                             | t <sub>PLH</sub>  | R <sub>DIFF</sub> = 54Ω  | 10  | 30  | 60  | ns    |
|  | t <sub>PHL</sub>  | C <sub>L1</sub> = C <sub>L2</sub> = 100pF                          | 10  | 30  | 60  |       |
| Driver Output Skew to Output                       | t <sub>SKEW</sub> | R <sub>DIFF</sub> = 54Ω, C <sub>L1</sub> = C <sub>L2</sub> = 100pF |     | 5   | 10  | ns    |
| Driver Enable to Output High                       | t <sub>ZH</sub>   | C <sub>L</sub> = 100pF, S2 closed                                  |     | 40  | 70  | ns    |
| Driver Enable to Output Low                        | t <sub>ZL</sub>   | C <sub>L</sub> = 100pF, S1 closed                                  |     | 40  | 70  | ns    |
| Driver Disable Time from Low                       | t <sub>LZ</sub>   | C <sub>L</sub> = 15pF, S1 closed                                   |     | 40  | 70  | ns    |
| Driver Disable Time from High                      | t <sub>HZ</sub>   | C <sub>L</sub> = 15pF, S2 closed                                   |     | 40  | 70  | ns    |
| t <sub>PLH</sub> - t <sub>PHL</sub>   Differential | t <sub>SKD</sub>  | R <sub>DIFF</sub> = 54Ω  |     | 13  |     | ns    |
| Receiver Skew                                      |                   | C <sub>L1</sub> = C <sub>L2</sub> = 100pF                          |     |     |     |       |
| Receiver Enable to Output Low                      | t <sub>ZL</sub>   | C <sub>RL</sub> = 15pF, S1 closed                                  |     | 20  | 50  | ns    |
| Receiver Enable to Output High                     | t <sub>ZH</sub>   | C <sub>RL</sub> = 15pF, S2 closed                                  |     | 20  | 50  | ns    |
| Receiver Disable Time from Low                     | t <sub>LZ</sub>   | C <sub>RL</sub> = 15pF, S1 closed                                  |     | 20  | 50  | ns    |
| Receiver Disable Time from High                    | t <sub>HZ</sub>   | C <sub>RL</sub> = 15pF, S2 closed                                  |     | 20  | 50  | ns    |
| Maximum Data Rate                                  | f <sub>MAX</sub>  |  | 2.5 |     |     | Mbps  |

Operation timing diagrams of MAX 485

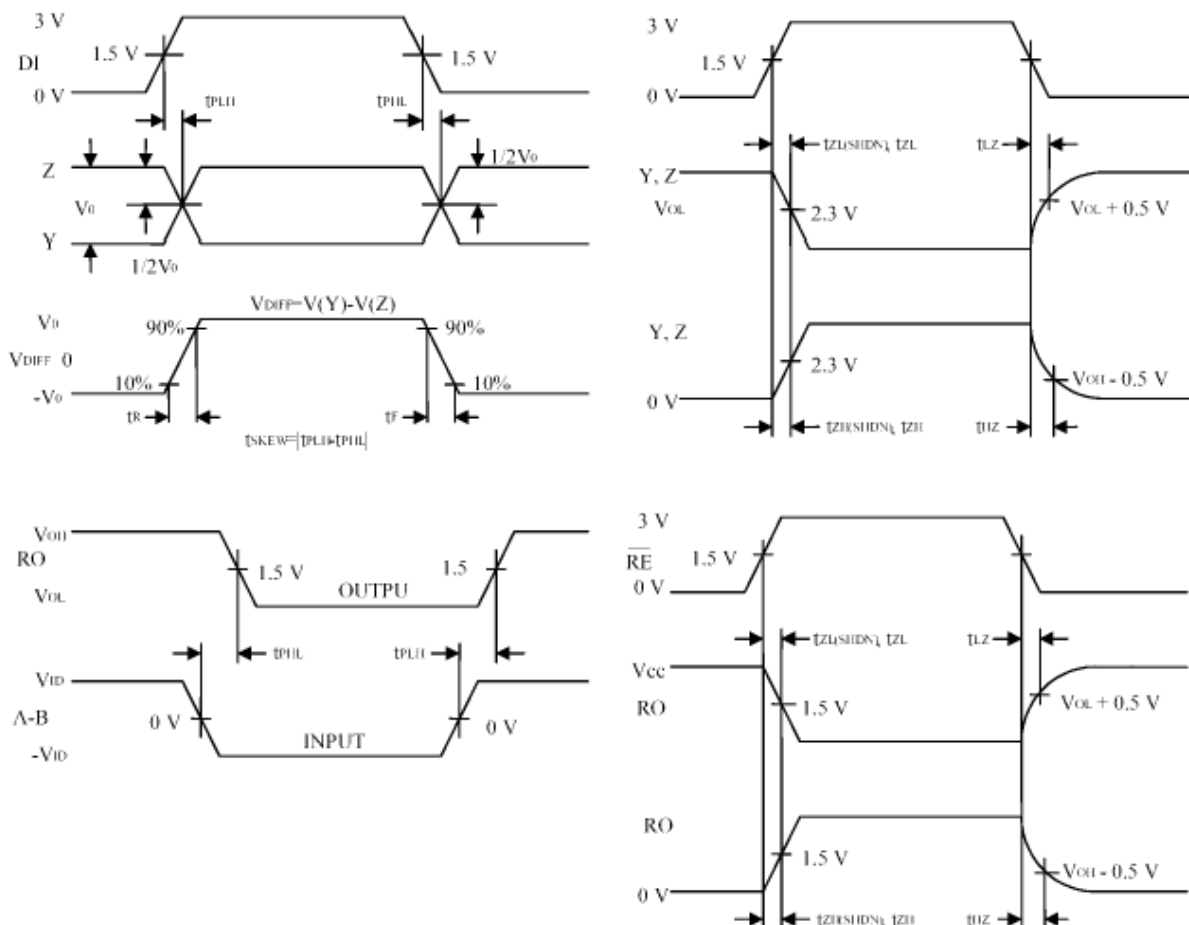


Table of MAX 485 operation

| Transmission |    |    |           |   | Receipt |    |       |         |
|--------------|----|----|-----------|---|---------|----|-------|---------|
| Inputs       |    |    | Outputs X |   | Inputs  |    |       | Outputs |
| RE           | DE | DI | Z         | Y | RE      | DE | A-B   | RO      |
| X            | 1  | 1  | 0         | 1 | 0       | 0  | +0.2V | 1       |
| X            | 1  | 0  | 1         | 0 | 0       | 0  | -0.2V | 0       |
| 0            | 0  | X  | Z         | Z | 0       | 0  | open  | 1       |
| 1            | 0  | X  | Z         | Z | 1       | 0  | X     | Z       |

X-don't care  
Z-high resistance

单击下面可查看定价，库存，交付和生命周期等信息

[>>UMW\(友台半导体\)](#)