

SS41F6 SENSOR IC

006010
Issue 1

High Voltage and ESD Protection Bipolar Hall-Effect Digital Position Sensor ICs

DESCRIPTION


The SS41F6 sensor ICs are versatile digital Hall-effect devices operated by the magnetic field from a permanent magnet or an electromagnet, and are designed to respond to alternating North and South poles. The built-in regulator provides enhanced operation stability from 4.5 Vdc to 60 Vdc supply voltage range, and internal circuitry is designed to prevent sensor damage in case the supply voltage polarity is accidentally reversed. Output short circuit protection is enabled when the output load current exceeds the rated load current specified in Table 1. The open-collector, sinking output voltage can be easily interfaced with a wide variety of electronic circuits. These products are available in a flat TO-92-style package with straight leads in bulk packaging.

FEATURES

- ESD protected +16 kV (HBM - Human Body Model)
- Enhanced supply voltage range of 4.5 Vdc to 60 Vdc allows use in a wide variety of applications
- Current consumption of only 5 mA max. at 4.5 Vdc provides energy efficiency
- Output short circuit protection
- Bipolar magnetics for ring magnet applications with alternating North and South poles
- Temperature range of -40°C to 150°C [-40°F to 302°F]
- RoHS-compliant materials meet Directive 2002/95/EC
- Small, leaded, flat TO-92-style package allows for a compact PCB layout

POTENTIAL APPLICATIONS

- **Transportation:** Speed and RPM sensing, electric motor commutation and control
- **Industrial and Commercial:** Flow-rate sensing for appliances, tachomotor counter pickup, brushless dc motor commutation, motor and fan control
- **Medical:** Equipment or instruments that use electric motors

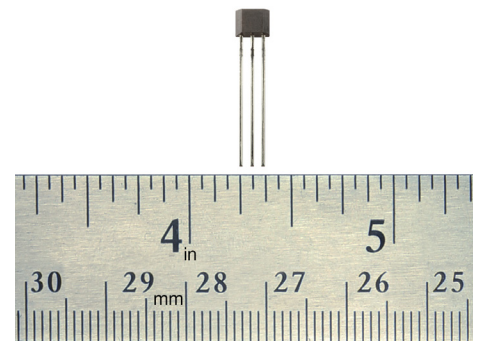

PORTFOLIO

Click here for other bipolar digital position sensor ICs

which include:

- SS30AT, SS40A, SS50AT
- SS311PT, SS411P
- SS40F, SS40AF
- SS400 Series, SS500 Series (selected catalog listings)
- SS41, SS41-L, SS41-T2, SS41-T3, SS41-S, SS41-SP

Honeywell

BIPOLAR HALL-EFFECT DIGITAL POSITION SENSOR ICs

SS41F6

TABLE 1. PERFORMANCE SPECIFICATIONS
(At $V_S = 4.5\text{ V to }60\text{ V}$, $T_A = -40^\circ\text{C to }150^\circ\text{C}$ [$-40^\circ\text{F to }302^\circ\text{F}$], $I_O = 15\text{ mA}$, except where otherwise specified.)

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage	V_S	— -40°C to 125°C [-40°F to 257°F] 150°C [302°F]	4.5 4.5 4.5	— — —	60.0 60.0 24.0	V
Supply current	I_S	—	—	3.6	10.0	mA
Output voltage (ON)	V_{SAT}	$I_O = 15\text{ mA}$	—	0.215	0.600	V
Output leakage current	I_{OH}	—	—	—	10.0	μA
Output current limit ¹	$I_{O(SCP)}$	short circuit protection ¹	40	—	—	mA
Output switching time:						
rise time	t_r	$T_A = 25^\circ\text{C}$ [77°F]	—	—	1.5	μs
fall time	t_f	$T_A = 25^\circ\text{C}$ [77°F]	—	—	1.5	μs
ESD (Human Body Model)	V_{ESD}	per JEDEC JS-001-2014	-16	—	16	kV
Operating temperature	T_A	—	-40 [-40]	—	150 [302]	°C [°F]
Junction temperature	T_J	—	-40 [-40]	—	165 [329]	°C [°F]
Storage temperature	T_S	—	-40 [-40]	—	150 [302]	°C [°F]
Thermal resistance	$R_{\theta JA}$	—	—	—	233	°C/W
Soldering time and temperature	—	3 s max.	250 [482]	—	260 [500]	°C [°F]

¹ Output short circuit protection is enabled when the output load current exceeds the rated load current.

TABLE 2. MAGNETIC CHARACTERISTICS
(At $V_S = 4.5\text{ V to }60\text{ V}$, $T_A = -40^\circ\text{C to }150^\circ\text{C}$ [$-40^\circ\text{F to }302^\circ\text{F}$], except where otherwise specified.)

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Unit
Operate	B_{OP}	— $T_A = 25^\circ\text{C}$ [75°F]	— —	25 25	115 65	Gauss
Release	B_{RP}	— $T_A = 25^\circ\text{C}$ [75°F]	-115 -65	-25 -25	— —	Gauss
Differential	B_{DIF}	—	30	—	—	Gauss

NOTICE

These Hall-effect sensor ICs may have an initial output in either the ON or OFF state if powered up with an applied magnetic field in the differential zone (applied magnetic field $>B_{RP}$ and $<B_{OP}$). Honeywell recommends allowing 10 μs after supply voltage has reached 4.5 V for the output voltage to stabilize.

NOTICE

The magnetic field strength (Gauss) required to cause the switch to change state (operate and release) will be as specified in the magnetic characteristics (see Table 2). To test the switch against the specified limits, the switch must be placed in a uniform magnetic field.



TABLE 3. ABSOLUTE MAXIMUM SPECIFICATIONS

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage	V_S	—	-0.5	—	60.0	V
Output voltage	V_O	—	-0.5	—	60.0	V
Output current	I_O	—	—	—	N/A ¹	mA
Magnetic flux	B	—	—	—	no limit	Gauss

¹ Output short circuit protection is enabled when the output load current exceeds the rated load current shown in Table 1.

NOTICE

Absolute maximum ratings are the extreme limits the device will momentarily withstand without damage to the device. Electrical and mechanical characteristics are not guaranteed if the rated voltage and/or currents are exceeded, nor will the device necessarily operate at absolute maximum ratings.

BIPOLAR HALL-EFFECT DIGITAL POSITION SENSOR ICs SS41F6

FIGURE 1. MAGNETIC CHARACTERISTICS VS TEMPERATURE

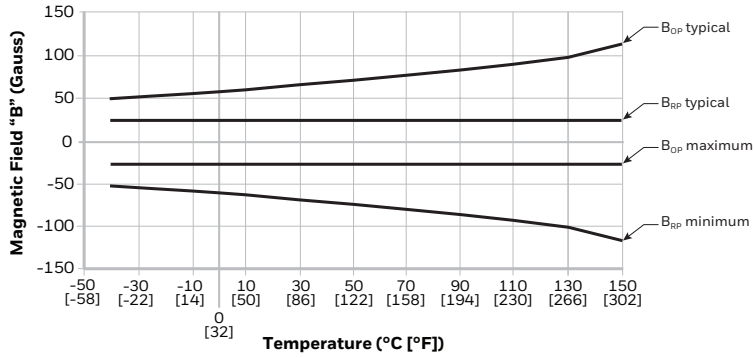


FIGURE 2. POWER DERATING CURVE

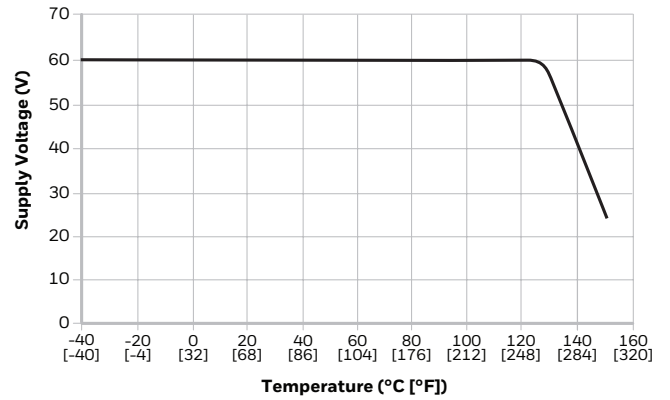


FIGURE 3. TRANSFER CHARACTERISTICS

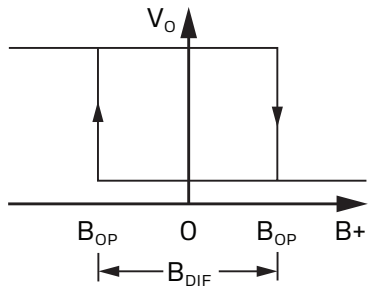


FIGURE 4. TRANSFER CHARACTERISTICS DEFINITION

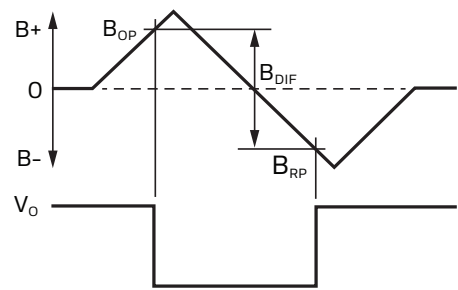


FIGURE 5. CURRENT SINKING OUTPUT BLOCK DIAGRAM



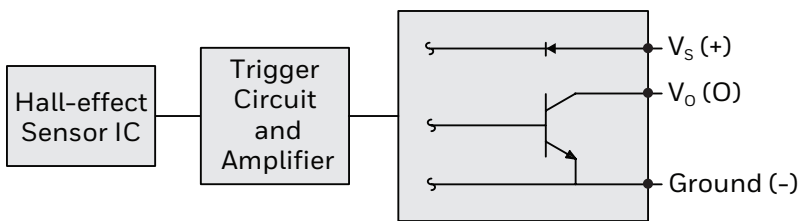


FIGURE 6. BASIC APPLICATION CIRCUIT

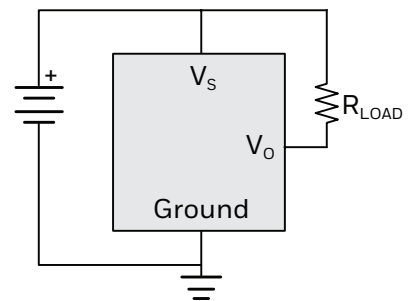

BIPOLAR HALL-EFFECT DIGITAL POSITION SENSOR ICs SS41F6

FIGURE 7. MOUNTING AND DIMENSIONAL DRAWINGS (FOR REFERENCE ONLY: MM/[IN])

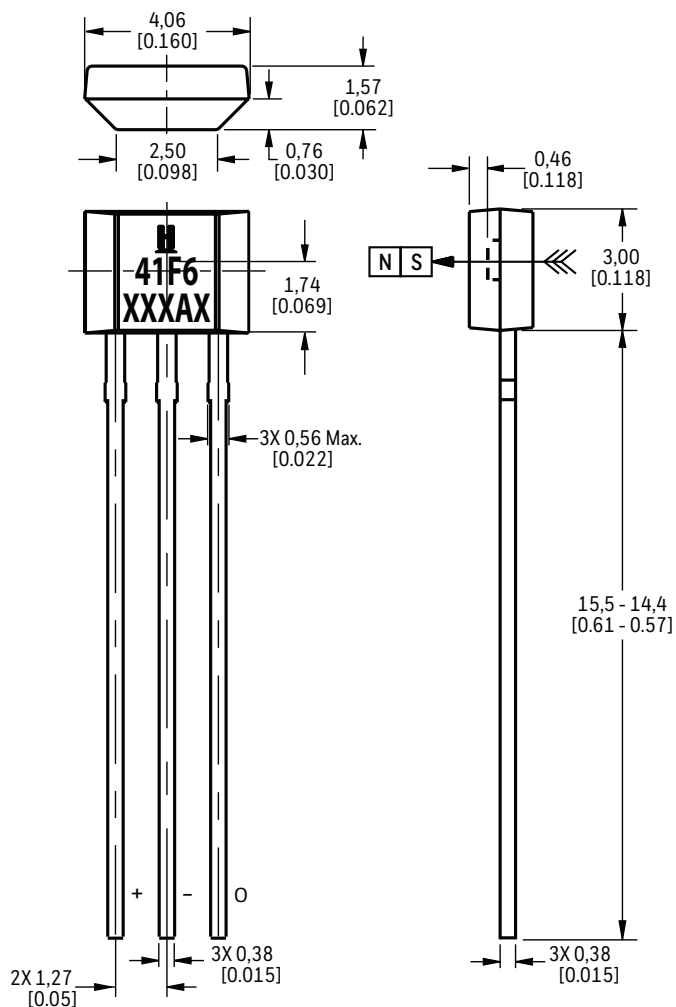

Note: Ensure the minimum hole size in the PCB is 0,68 mm [0.027] dia. based on the IPC 2222 Level B standard.

TABLE 4. ORDER GUIDE

Catalog Listing	Description
SS41F6	Bipolar Hall-Effect Digital Position Sensor, 4.5 Vdc to 60 Vdc supply voltage range, flat TO-92-style, straight standard leads, bulk pack, 1000 units/bag



WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective. The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.

While Honeywell may provide application assistance personally, through our literature and the Honeywell web site, it is buyer's sole responsibility to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

FOR MORE INFORMATION

Honeywell Sensing and Safety Technologies services its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or the nearest Authorized Distributor, visit [our website](#) or call:

USA/Canada	+1 302 613 4491
Latin America	+1 305 805 8188
Europe	+44 1344 238258
Japan	+81 (0) 3-6730-7152
Singapore	+65 6355 2828
Greater China	+86 4006396841

Honeywell Sensing and Safety Technologies

830 East Arapaho Road
Richardson, TX 75081
sps.honeywell.com/ast

006010-1-EN | 1 | 07/22
© 2022 Honeywell International Inc. All rights reserved.

WARNING PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

Honeywell

单击下面可查看定价，库存，交付和生命周期等信息

[>>Honeywell\(霍尼韦尔\)](#)