

General Description

The SY5072 is a constant voltage BCM boost controller with Power Factor Correction (PFC) function. Constant ON Time control is applied to achieve high PF and low THD without multiplier. It drives the Boost converter in the Quasi-Resonant mode for high efficiency and better EMI performance. It adopts special design to achieve quick start up and reliable protection for safety requirement.

Features

- Valley Turn-on to Achieve Low Switching Losses
- Frequency Reduce in Light Load
- Internal High Current MOSFET Driver: 75mA Sourcing and 400mA Sinking
- MOSFET Over-Current Protection(OCP)
- Internal THD Optimization to Achieve Low THD
- Internal Transition Optimization
- RoHS Compliant and Halogen Free
- Compact Package: SOT23-6

Ordering Information

SY5072 □(□□)□
 □ Temperature Code
 □ Package Code
 □ Optional Spec Code

| Ordering Number | Package type | Note |
|-----------------|--------------|------|
| SY5072ABC | SOT23-6 | ---- |

Applications

- AC/DC Adapters
- Pre-stage for Two-stage AC/DC Converter
- LED Lighting

Typical Applications


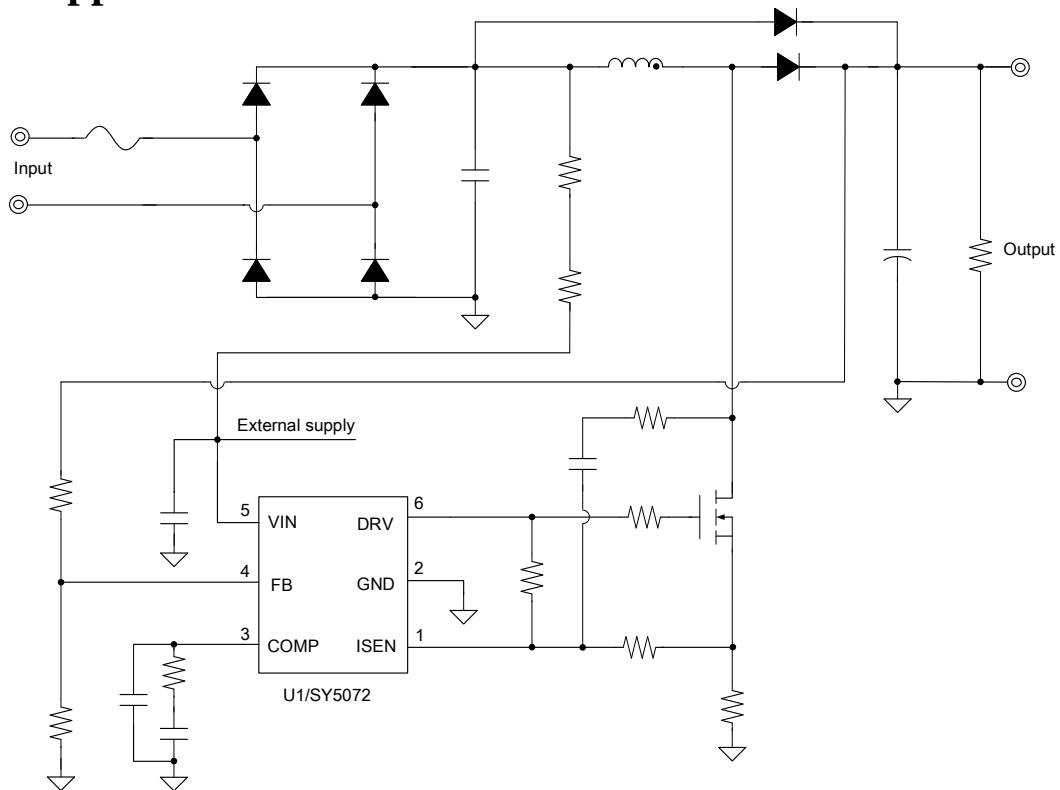


Figure 1. Schematic Diagram

Pinout (top view)

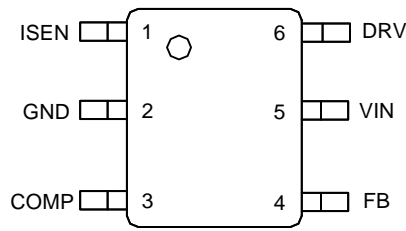

(SOT23-6)

Top Mark: dQ xyz (device code: dQ, x=year code, y=week code, z= lot number code)

| Pin | Name | Description |
|-----|------|---|
| 1 | ISEN | Current limit and Zero-crossing sense PIN. |
| 2 | GND | Ground pin. |
| 3 | COMP | Loop compensation pin. Connect a RC network across this pin and ground to stabilize the control loop. |
| 4 | FB | Feedback pin. This pin receives output feedback voltage. The internal reference is 1.25V. |
| 5 | VIN | Power supply pin. |
| 6 | DRV | Gate driver pin. Connect this pin to the gate of primary MOSFET with a resistor. |

Absolute Maximum Ratings (Note 1)

| | |
|---|------------------|
| VIN | -0.3V to 28V |
| DRV | -0.3V to 25V |
| ISEN, COMP, FB | 3.6V |
| Power Dissipation, @ T _A = 25 °C SOT23-6 | 0.6W |
| Package Thermal Resistance (Note 2) | |
| SOT23-6,θ _{JA} | 170 °C/W |
| SOT23-6,θ _{JC} | 130 °C/W |
| Temperature Range | -40 °C to 150 °C |
| Lead Temperature (Soldering, 10 sec.) | 260 °C |
| Storage Temperature Range | -65 °C to 150 °C |

Recommended Operating Conditions (Note 3)

| | |
|------------------------|------------------|
| VIN, DRV | 9V~22V |
| Absolute maximum range | -40 °C to 150 °C |

Block Diagram

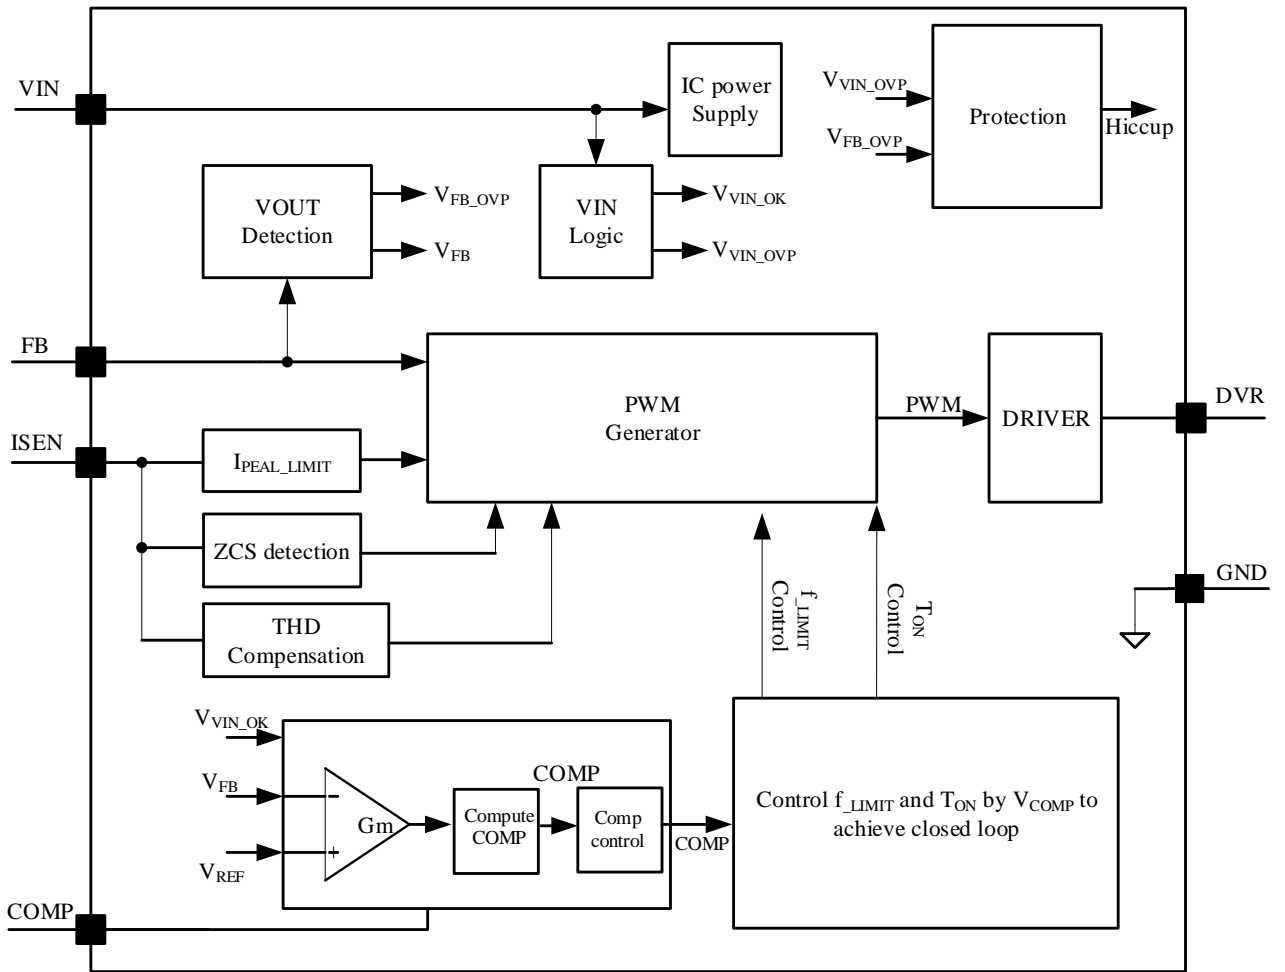


Figure2. Block Diagram

Electrical Characteristics

($V_{IN} = 12V$ (Note 3), $T_A = 25\text{ }^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|--------------------------------------|-------------------|--------------------------|-------|-------|-------|------------------|
| Power Supply Section | | | | | | |
| VIN Turn-on Threshold | V_{VIN_ON} | | | 14.6 | | V |
| VIN Turn-off Threshold | V_{VIN_OFF} | | | 7.5 | | V |
| VIN OVP Voltage | V_{VIN_OVP} | | | 24.5 | | V |
| Start up Current | I_{ST} | $V_{VIN} < V_{VIN_ON}$ | | 1.9 | | μA |
| Quiescent Current | I_Q | No Switching | | 0.45 | | mA |
| Discharge Current in Protection Mode | I_{VIN_P} | $V_{VIN} > V_{VIN_OVP}$ | | 5.0 | | mA |
| Error Amplifier Section | | | | | | |
| Current Limit Voltage | V_{ISEN_LIMIT} | | | 1.00 | | V |
| V_{FB} at Fast Start up | V_{FB_LOW} | | | 1.10 | | V |
| Internal Reference Voltage | V_{REF} | | 1.225 | 1.250 | 1.275 | V |
| OVP Voltage Threshold | V_{FB_OVP} | | | 1.35 | | V |
| Gate Driver Voltage | V_{Gate} | | | 12 | | V |
| Typical Source Current | I_{SOURCE} | | | 75 | | mA |
| Typical Sink Current | I_{SINK} | | | 400 | | mA |
| Max ON Time | T_{ON_MAX} | $V_{comp}=2.5V$ | | 24 | | μs |
| Min ON Time | T_{ON_MIN} | | | 0.45 | | μs |
| Thermal Section | | | | | | |
| Thermal Shutdown Temperature | T_{SD} | | | 155 | | $^\circ\text{C}$ |

Note 1: Stresses beyond the “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note 2: θ_{JA} is measured in the natural convection at $T_A = 25\text{ }^\circ\text{C}$ on a low effective single layer thermal conductivity test board of JEDEC 51-3 thermal measurement standard. Test condition: Device mounted on 2” x 2” FR-4 substrate PCB, 2oz copper, with minimum recommended pad on top layer and thermal vias to bottom layer ground plane.

Note 3: Increase VIN pin voltage gradually higher than V_{VIN_ON} voltage then turn down to 12V.

Operation

SY5072 is a constant voltage boost controller with Power Factor Correction (PFC) function designed to drive cost-effective pre-converter to comply with line current harmonic limits.

SY5072 operates in boundary conduction mode (BCM) suitable for applications up to 150 W. Its voltage mode (constant on time control) scheme enables it to obtain near unity power factor without line voltage sensing network.

To achieve higher efficiency and better EMI performance, SY5072 drives Boost MOSFET in the Quasi-resonant mode, which means to turn on the power MOSFET at voltage valley.

Integrate THD compensation which is adjustable for different application to achieve low THD.

Better line transition and load transition due to internal optimization.

The start-up current of SY5072 is rather small (1.9μA typically) and frequency reduce in light load to reduce the standby power loss further.

SY5072 integrates suitable Source 75mA/Sink 400mA gate driver for fast switching which is good for EMI improvement and IC power-loss.

SY5072 provides reliable protections such as Over Voltage Protection (OVP), Over Current Protection (OCP), Over Temperature Protection (OTP), etc.

SY5072 is available with SOT23-6 package for now.

Applications Information

Start up

After AC supply or DC BUS is powered on, the capacitor C_{VIN} across VIN and GND pin is charged up by BUS voltage through a start-up resistor R_{ST} . The low startup current consumption ($=1.9\mu A$) enables minimized standby power dissipation.

Once V_{VIN} rises up to V_{VIN-ON} , the internal blocks start to work and V_{VIN} decreases due to the power consumption of IC till the external supply or the auxiliary winding of Boost inductor can afford V_{VIN} . SY5072 includes an under voltage lockout (UVLO) which ensures working till V_{VIN} decreases to be less

than $V_{VIN-OFF}$. This hysteresis ensures sufficient time to wait for the V_{IN} supplied from the external supply or the auxiliary winding.

The entire start up procedure is divided into two sections as shown in Fig.5, wherein, t_{STC} is the C_{VIN} charged up section, and t_{STO} is the output voltage built-up section. The start-up time t_{ST} composes of t_{STC} and t_{STO} . Usually t_{STO} is much smaller than t_{STC} .

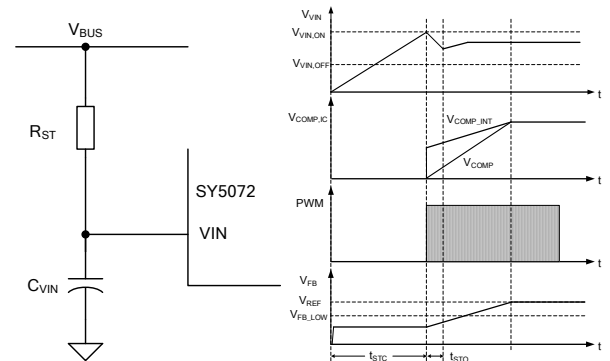


Figure3. Start up

If V_{FB} is lower than certain threshold V_{FB_LOW} , which means the output voltage is not built up, V_{COMP} is pulled up by a big resistor (R_g) to high clamped V_{COMP_INT} ; and hold at this level until V_{FB} is near to V_{REF} . This operation is aimed to build up enough output voltage as soon as possible. The simple logical diagram shown as Figure 4.

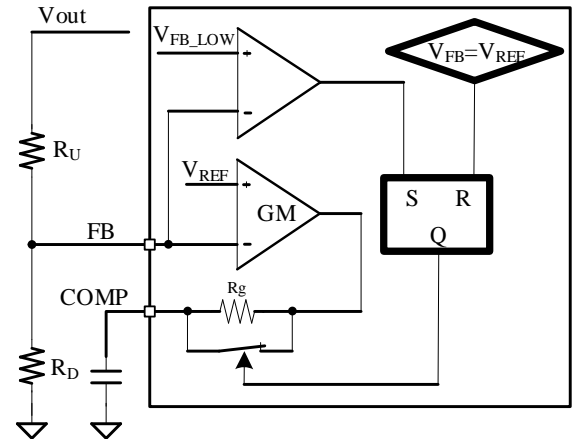


Figure4. Startup logical diagram

If R_{ST} is connected between rectified BUS line and VIN pin, then the design of R_{ST} and C_{VIN} can follow the rules shown below (same as when R_{ST} is connected between output terminal and VIN pin):

(a) Preset start-up resistor R_{ST} , make sure that the current through R_{ST} is larger than I_{ST} and smaller than 1mA.

$$\frac{V_{BUS}}{1mA} < R_{ST} < \frac{V_{BUS}}{I_{ST}} \quad (1)$$

Wherein, V_{BUS} is the BUS line voltage.

(b) Select C_{VIN} to obtain an ideal start up time t_{ST} ($t_{ST} \gg t_{STO}$), and ensure the output voltage is built up at one time.

$$C_{VIN} = \frac{\left(\frac{V_{BUS}}{R_{ST}} - I_{ST}\right) \times t_{ST}}{V_{VIN_ON}} \quad (2)$$

(c) If the energy stored in C_{VIN} is not enough for IC building up the output voltage smoothly, try to increase C_{VIN} and decrease R_{ST} . Then go back to step (a) and redo such design flow till the ideal start up procedure is obtained.

Shut down

After AC supply or DC BUS is powered off, the energy stored in the BUS capacitor will be discharged. If the auxiliary winding cannot provide enough energy to VIN pin, V_{VIN} will drop down.

Once V_{VIN} is lower than V_{VIN_OFF} , IC stops working and V_{COMP} will be discharged to zero.

Quasi-resonant Operation

QR mode operation provides low turn-on switching losses in MOSFET.

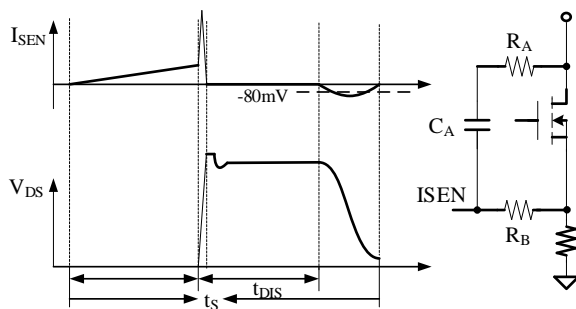


Figure 5. QR mode operation

The voltage across drain and source of Boost MOSFET V_{DS} is reflected by RC (R_A & C_A) which is connected between the drain of MOSFET and I_{SEN} pin. A resistor (R_B) is connected between I_{SEN} and I_{SEN} resistor to detect negative voltage if the I_{SEN} voltage decreases to -

80mV. Approximate the inductor current is crossing zero. The MOSFET is turned on after 500nS delay when crossing zero has been detect.

The capacitor C_A is need for ZCS detect. The larger the capacitance capacity, the greater the capacitance loss. Thus, $C_A=10pF$ and $RA=1K$ is recommend.

The resistor R_B is use for amplifying resonance signal and easy for ISEN pin to detect crossing zero signal.

Error Amplifier Regulation

SY5072 regulates the boost output voltage using a trans-conductance internal error amplifier (EA). The inverting terminal of the EA is pinned out to FB. The non-inverting terminal is connected to an internal 1.25V voltage reference, and the EA output is pinned out to COMP (Fig.6).

The R_k is a parasitic resistance that is good for loop control and the resistance is about 8K.

Because of the trans-conductance error amplifier employing, the FB pin can also be used to detect the output over voltage condition and under voltage condition.

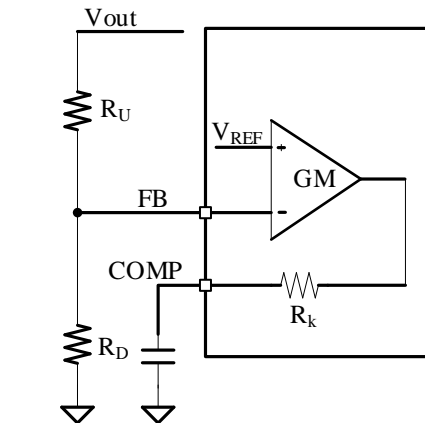


Figure 6 Output voltage feedback circuit

A resistor divider (R_U and R_{DOWN}) scales down the Boost output voltage (V_{OUT}) and connects to the FB pin. If the output voltage is less than the regulation, then the control voltage (V_{COMP}) increases the on time of the driver, which increases the power transferring from the input to the output. If V_{OUT} is higher than the regulation, the V_{COMP} decreases the on time to limit the power transferring.

The output voltage is regulated by equation (3).

$$V_{OUT} = V_{REF} \times \left(\frac{R_U + R_D}{R_D} \right) \quad (3)$$

Over Voltage Protection (OVP)

Because of the extremely low bandwidth of PFC's voltage loop, there is a risk of overshoots at output side during startup, load steps, and line steps. For reliable operation, the over voltage protection (OVP) is necessary to prevent output voltage from exceeding the ratings of the PFC stage components.

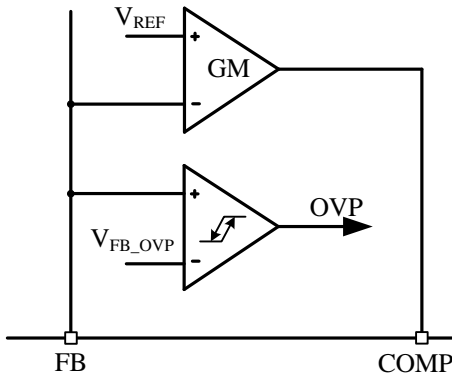


Figure.7 Output protection circuit

SY5072 detects the over voltage condition (V_{FB_OVP}) and disables the driver until V_{OUT} decreases to a safe level, which ensures that V_{OUT} is within the PFC stage component ratings. An internal comparator connected to the FB pin provides the OVP protection.

OVP threshold V_{FB_OVP} is 8% above the regulation voltage reference. The OVP voltage is calculated using equation (4).

$$V_{OUT} = V_{FB_OVP} \times \left(\frac{R_U + R_D}{R_D} \right) \quad (4)$$

The value of C_{bulk} is sized to ensure that OVP is not inadvertently triggered by the 100 Hz or 120 Hz ripple of V_{OUT} .

In the steady states, the minimum value of C_{bulk} is calculated using equation (5) and assume that the ESR of output capacitor is insignificant.

$$C_{bulk} \geq \frac{P_{OUT}}{2 \times \pi \times V_{ripple(peak-peak)} \times f_{line} \times V_{OUT}} \quad (5)$$

Wherein, $V_{ripple(peak-peak)}$ is the peak-to-peak output voltage ripple and usually selected in the range of 3.0%

of the output voltage; f_{line} is the ac line frequency (50Hz or 60Hz).

Frequency reduction

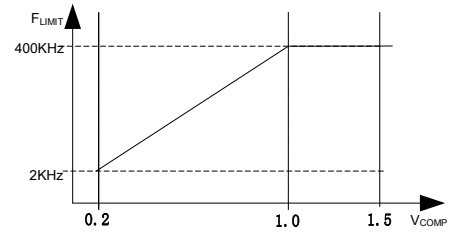


Figure.8 Frequency reduction

Frequency reduction depends on V_{comp} :

When $V_{comp} > 1.0V$, frequency limited at 400 KHz;

When $V_{comp} < 1.0V$, frequency will slowly reduce from 400 KHz to 2 KHz.

Special Design for Transition

To have good transition performance, special design is integrate into SY5072.

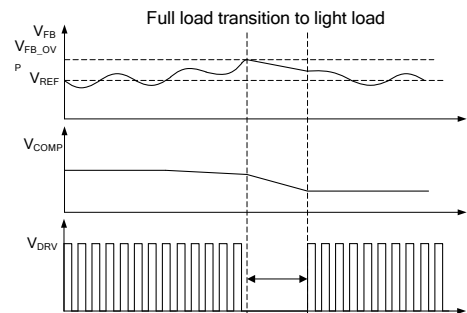


Figure.9 Load transition (Full load to light load)

When V_{SEN} touch V_{FB_OVP} , IC will stop DRV to decrease output energy, and then V_{COMP} decrease by loop to reach a new balance.

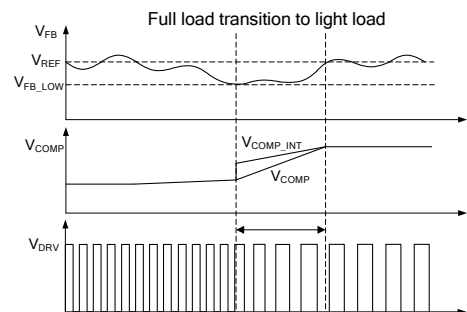


Figure.10 Load transition (light load to Full load)

When FB touch V_{FB_LOW} , a big resistor will be connected to COMP(refer to startup logic), thus, V_{COMP_INT} will higher than V_{COMP} , the ON time of the DRV increase suddenly to expedite output energy until FB reach V_{REF} and V_{COMP} equal to V_{COMP_INT} again. V_{COMP} reach a new balance.

Line transition is similar to Load transition. If input voltage changes from low to high, it can refer to Full load to light load; if input voltage changes from high to low, it can refer to light load to Full load.

Over Current Protection (OCP)

The dedicated ISEN pin of SY5072 limits the MOSFET peak current cycle by cycle if the voltage of the ISEN pin exceeds V_{ISEN_LIMIT} .

The maximum power inductor current (I_{PK_MAX}) occur in minimum input voltage when full load. So R_{ISEN} could be selected by:

$$R_{sense} = \frac{90\% \times V_{ISEN_LIMIT}}{I_{PK_MAX}} \quad (6)$$

Where V_{ISEN_LIMIT} is a protection for transformer (If V_{ISEN} touch this voltage, gate will turn off), and I_{PK_MAX} is the maximum power inductor in steady.

Internal THD Compensation

Because of the existence of the inductance and the capacitance C_{ds} of the MOSFET, when inductance current is zero, they begin LC resonant. Before the MOSFET switch on, there is a part of negative current in inductance current.

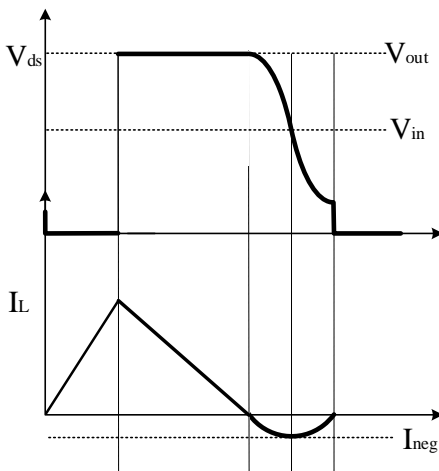


Figure.11 current of inductance

The term i_{neg} is a function of V_{in} , V_{out} , L and C_{ds} . In fact, during the resonance we can assume no loss and use energy conservation to calculate it:

$$i_{neg} = (V_{out} - V_{in}) \times \sqrt{C_{ds}/L} \quad (7)$$

From a power frequency period, the waveform of inductance current is shown in Figure 12.

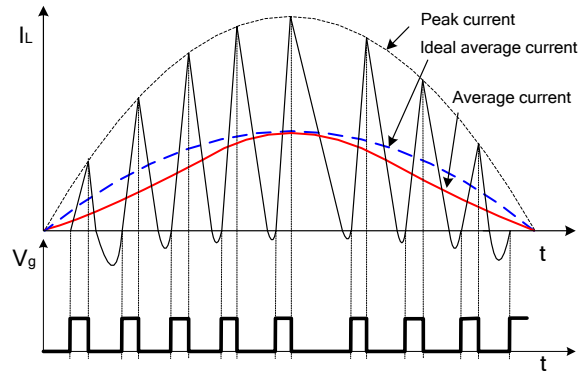


Figure.12 average current waveform of inductance

Ideal average current which controlled by COT is a sin wave following the input voltage. But the actual average current has been distorted. That is bad for THD performance.

THD compensation helps to remove the effect of negative current to achieve better THD. The analog implementation example shown in Figure 13 is similar to a standard COT with the addition of a voltage comparator with fixed threshold (200mV).

Ton generator does not work until ISEN larger than fixed threshold (200mV). After that, comparator output will be set high to enable the Ton generator and Ton generator begin to work. The compensation current ΔI can be calculated using equation (8):

$$\Delta I = 200mV/R_S \quad (8)$$

If $\Delta I = i_{neg}$, the effect of the negative current will be offset and THD will be optimized.

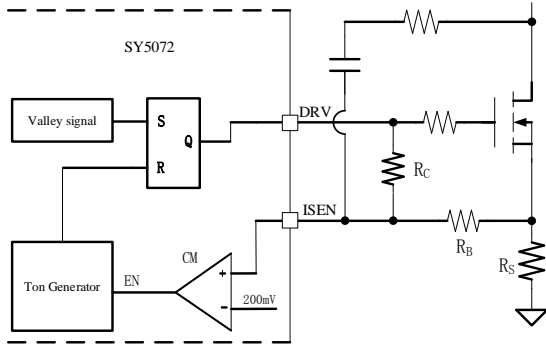


Figure.13 THD compensation logic

Actually, different applications will have different LC parameters and I_{neg} will be difference. The SY5072 support external parameter modification to change the compensation current and achieve the optimal THD. External parameter is the resistor R_B and R_C . Shown in the figure 13.

Assume $R_C \gg R_B$ and the compensation ΔI can be calculated using equation (9).

$$\Delta I = (200mV - V_{DRV} / R_C \times R_B) / R_S \quad (9)$$

Different applications need different ΔI . R_C is the discharge resistor of MOSFET and 10K is the recommend. Then changing R_B can achieve ideal THD preferment.

Power Device Design

MOSFET and Diode

When the operation condition is maximum voltage input and full load output, the MOSFET and Boost diode suffer the maximum voltage stress. Considering the output voltage, the overvoltage magnitude, and the derating margin for safety, 600V device is commonly selected.

When the operation condition is minimum voltage input and full load output, the semiconductor devices suffer the maximum current stress.

Peak current of inductor:

$$I_L(peak) = \frac{2\sqrt{2} \times P_{OUT}}{\eta \times V_{IN_MIN}} \quad (10)$$

Peak current of MOSFET:

$$I_{MOSFET(peak)} = I_{DIODE(peak)} = I_{L(peak)} \quad (11)$$

RMS current of inductor:

$$I_{L(rms)} = \frac{2 \times P_{OUT}}{\sqrt{3} \times \eta \times V_{IN_MIN}} \quad (12)$$

RMS current of MOSFET:

$$I_{MOSFET(rms)} = \frac{2}{\sqrt{3}} \times \frac{P_{out}}{\eta \times V_{IN_MIN}} \times \sqrt{1 - \left(\frac{\sqrt{2} \times 8 \times V_{IN_MIN}}{3 \times \pi \times V_{OUT}} \right)} \quad (13)$$

RMS current of DIODE:

$$I_{DIODE(rms)} = \frac{4}{3} \times \frac{P_{OUT}}{\eta \times \sqrt{V_{IN_MIN} \times V_{OUT}}} \times \sqrt{\frac{2 \times \sqrt{2}}{\pi}} \quad (14)$$

AVE current of DIODE:

$$I_{DIODE(ave)} = I_{OUT} = \frac{P_{OUT}}{V_{OUT}} \quad (15)$$

Wherein, P_{OUT} is the output power, V_{OUT} is the output voltage, V_{IN_MIN} is the minimum input AC voltage, η is the estimated efficiency.

Boost inductor

Once the minimum frequency $f_{s,min}$ is set, the inductance can be induced. According to BCM operating principle, boost inductor is calculated using equation (15).

$$L_{MAX} = \frac{V_{IN}^2 \times (V_{OUT} - \sqrt{2} \times V_{IN})}{2 \times f_{sw_MIN} \times P_{IN} \times V_{OUT}} \quad (16)$$

Wherein, $f_{s,min}$ is the preset minimum switching frequency, V_{IN} is input voltage.

Once the inductance is induced, we can calculate the winding turns for a specific core. The design rules are shown below.

- (a) Select the magnetic core and identify the effective area A_e ;
- (b) Preset the maximum magnetic flux ΔB normally within 0.22-0.26T;
- (c) Calculate primary winding turns N using equation (17);

$$N = \frac{L \times I_{L(peak)}}{Ae \times \Delta B} \quad (17)$$


Then select an appropriate wire diameter, grind the core to get required inductance with calculated turns number.

Layout

(a) To achieve better EMI performance and reduce line frequency ripples, the output of the bridge rectifier should be connected to the BUS line capacitor first, then to the switching circuit.

(b) The circuit loop of all switching circuit should be kept small: power loop and auxiliary power loop.

(c) The connection of primary ground is recommended as:



- Ground ①: ground of BUS line capacitor
- Ground ②: ground of bias supply capacitor
- Ground ③: ground node of current sample resistor.
- Ground ④: ground of signal trace

(d) bias supply trace should be connected to the bias supply capacitor first instead of GND pin. The bias supply capacitor should be put beside the IC.

(e) Loop of 'Source pin – current sample resistor – GND pin' should be kept as small as possible.

(f) The resistor divider connected to FB pin is recommended to be put beside the IC.

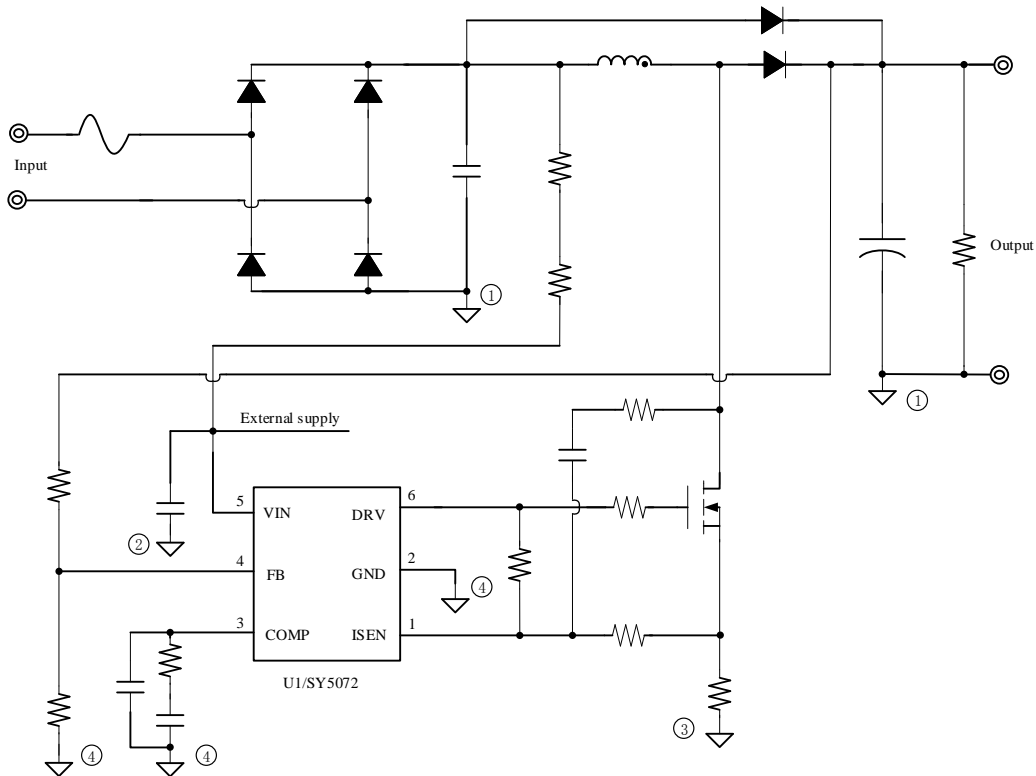


Figure.14 Recommended connection of GND

Design Example

A design example of typical application is shown below step by step.

#1. Identify Design Specification

| Design Specification | | | |
|----------------------|-------|---------------|--------|
| V_{AC_MIN} | 90VAC | V_{AC_MAX} | 264VAC |
| V_{OUT} | 420V | I_{OUT} | 140mA |
| P_{OUT} | 60W | η | 95% |
| f_{s_min} | 30kHz | | |

#2. Current calculation (peak and rms value)

$$I_L(peak) = \frac{2\sqrt{2} \times P_{OUT}}{\eta \times V_{IN_MIN}} = \frac{2\sqrt{2} \times 60}{0.95 \times 90} = 1.98A$$

$$I_{L(rms)} = \frac{2 \times P_{OUT}}{\sqrt{3} \times \eta \times V_{IN_MIN}} = \frac{2 \times 60}{\sqrt{3} \times 0.95 \times 90} = 0.81A$$

$$I_{MOSFET(rms)} = \frac{2}{\sqrt{3}} \times \frac{P_{out}}{\eta \times V_{IN_MIN}} \times \sqrt{1 - \left(\frac{\sqrt{2} \times 8 \times V_{IN_MIN}}{3 \times \pi \times V_{OUT}} \right)^2} = \frac{2}{\sqrt{3}} \times \frac{60}{0.95 \times 90} \times \sqrt{1 - \left(\frac{\sqrt{2} \times 8 \times 90}{3 \times \pi \times 420} \right)^2} = 0.70A$$

$$I_{DIODE(rms)} = \frac{4}{3} \times \frac{P_{OUT}}{\eta \times \sqrt{V_{IN_MIN}} \times V_{OUT}} \times \sqrt{\frac{2 \times \sqrt{2}}{\pi}} = \frac{4}{3} \times \frac{60}{0.95 \times \sqrt{90} \times 420} \times \sqrt{\frac{2 \times \sqrt{2}}{\pi}} = 0.41A$$

$$I_{DIODE(ave)} = I_{OUT} = \frac{P_{OUT}}{V_{OUT}} = \frac{60}{420} = 0.14A$$

#3. ISEN resistor

$$R_s = \frac{0.9 \times V_{ISEN_LIMIT}}{I_{L(peak)}} = \frac{0.9 \times 0.55}{0.98A} = 0.50$$

#4. Inductor Design (N and L)


(a) f_{s_min} is preset to 35kHz ;

(b) Compute inductor L with minimum and maximum input voltage ;


$$L_1 = \frac{V_{IN}^2 \times (V_{OUT} - \sqrt{2} \times V_{IN})}{2 \times f_{sw_MIN} \times P_{IN} \times V_{OUT}} = \frac{90^2 \times (420 - \sqrt{2} \times 90)}{2 \times 35000 \times \frac{60}{0.95} \times 420} = 1277\mu H$$

$$L_1 = \frac{V_{IN}^2 \times (V_{OUT} - \sqrt{2} \times V_{IN})}{2 \times f_{sw_MIN} \times P_{IN} \times V_{OUT}} = \frac{264^2 \times (420 - \sqrt{2} \times 264)}{2 \times 35000 \times \frac{60}{0.95} \times 420} = 1751\mu H$$


SOT23-6 Package outline & PCB layout design

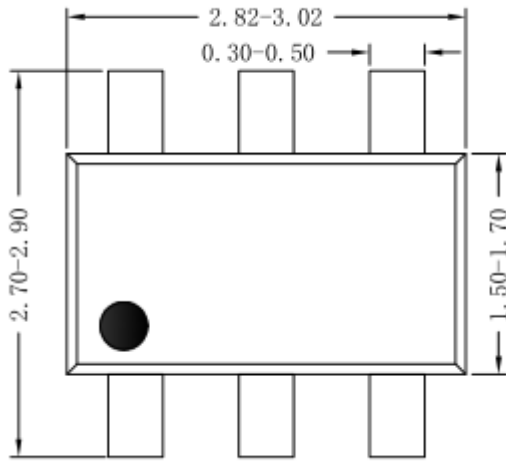


Top View

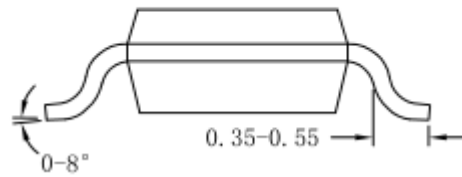

Side View

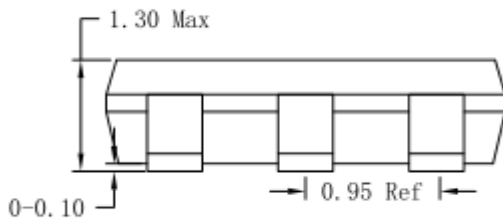

Side View

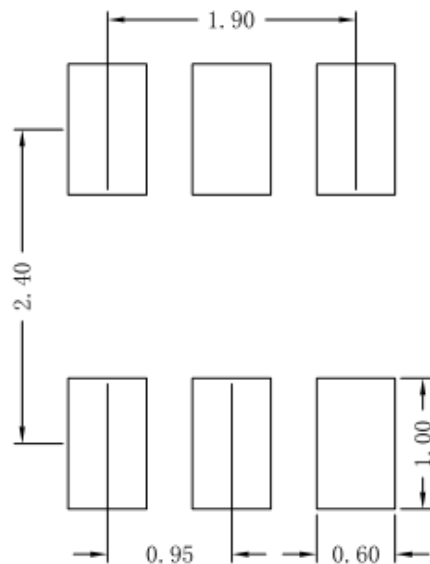


Recommended Pad Layout

Notes: All dimension in millimeter and exclude mold flash & metal burr.

Taping & Reel Specification


1. Taping orientation

SOT23-6

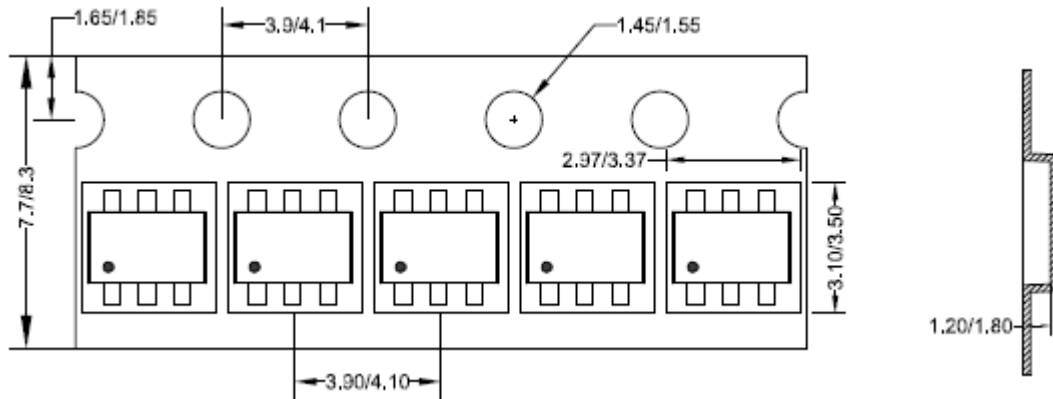

Feeding direction →

2. Carrier Tape & Reel specification for packages

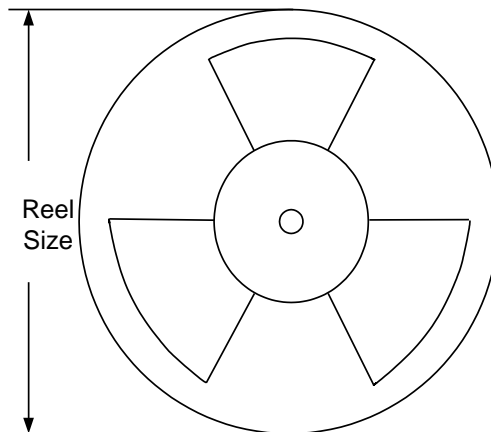

| Package types | Tape width (mm) | Pocket pitch(mm) | Reel size (Inch) | Trailer * length(mm) | Leader * length (mm) | Qty per reel (pcs) |
|---------------|--------------------|---------------------|---------------------|-------------------------|-------------------------|-----------------------|
| SOT23-6 | 8 | 4 | 7" | 280 | 160 | 3000 |

Others: NA

IMPORTANT NOTICE

- 1. Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.
- 2. Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.
- 3. Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.
- 4. Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.
- 5. Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.
- 6. No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

©2020 Silergy Corp.

All Rights Reserved.

单击下面可查看定价，库存，交付和生命周期等信息

[>>SILERGY\(矽力杰\)](#)