
THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

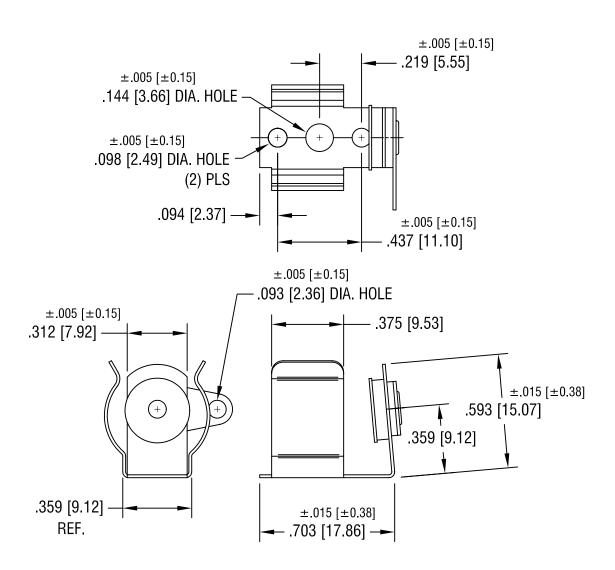

NOTES:

- 1. HEAT TREAT TO SPRING TEMPER.
- 2. CONTACT EYELET: BRASS, NICKEL PLATE INSULATING WASHERS:

VULCANIZED FIBRE

TERMINAL LUG: BRASS, TIN PLATE

Ι ,		ı	FINISH	
9.28.98	CHANGE AS PER ECR 98-072	В	NICKEL PI	
3.29.96	REVISED	Α	TOLERANCES INCH [DECIMAL ± .010 [± (
DATE	DESCRIPTION	REV.	ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED	

KEYSTONE ELECTRONICS CORP.

ASTORIA, N.Y. 11105-2017

PART NAME
'AA' BATTERY CLIP

MATERIAL

.015 [.38] TH'K ANNEALED SPRING STEEL

FINISH				DRN BY	BOONE	DATE	11.5.81
NICKEL PLATE			APP'D	LN	SCALE	2X	
TOLERANCES	INCH	[MM]	CODE	DWG N	VO.		

DECIMAL \pm .010 $[\pm$ 0.25] C 100

单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)