

PE43711

Product Specification

UltraCMOS® RF Digital Step Attenuator, 9 kHz–6 GHz




Features

- Flexible attenuation steps of 0.25 dB, 0.5 dB and 1 dB up to 31.75 dB
- Glitch-less attenuation state transitions
- Monotonicity: 0.25 dB up to 4GHz, 0.5 dB up to 5 GHz and 1 dB up to 6 GHz
- Extended +105 °C operating temperature
- Parallel and Serial programming interfaces
- Packaging—24-lead 4 × 4 mm QFN

Applications

- 3G/4G wireless infrastructure
- Land mobile radio (LMR) system
- Point-to-point communication system

Figure 1 • PE43711 Functional Diagram

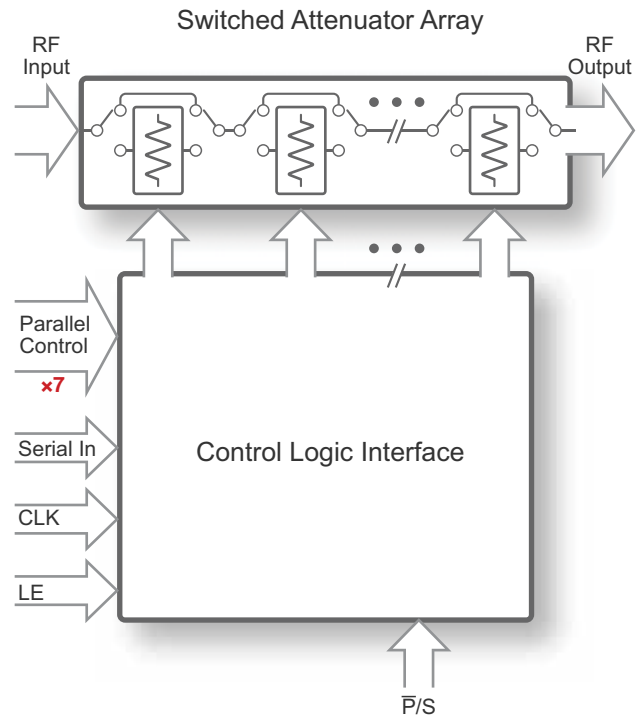

Product Description

The PE43711 is a 50Ω, HaRP™ technology-enhanced, 7-bit RF digital step attenuator (DSA) that supports a broad frequency range from 9 kHz to 6 GHz. It features glitch-less attenuation state transitions and supports 1.8V control voltage and an extended operating temperature range to +105 °C, making this device ideal for many broadband wireless applications.

The PE43711 is a pin-compatible upgraded version of the PE43502, PE43503, PE43602 and PE43702. An integrated digital control interface supports both Serial and Parallel programming of the attenuation, including the capability to program an initial attenuation state at power-up.

The PE43711 covers a 31.75 dB attenuation range in 0.25 dB, 0.5 dB and 1 dB steps. It is capable of maintaining 0.25 dB monotonicity through 4 GHz, 0.5 dB monotonicity through 5 GHz and 1 dB monotonicity through 6 GHz. In addition, no external blocking capacitors are required if 0 VDC is present on the RF ports.

The PE43711 is manufactured on Peregrine's UltraCMOS® process, a patented variation of silicon-on-insulator (SOI) technology on a sapphire substrate.

Peregrine's HaRP technology enhancements deliver high linearity and excellent harmonics performance. It is an innovative feature of the UltraCMOS process, offering the performance of GaAs with the economy and integration of conventional CMOS.

Absolute Maximum Ratings

Exceeding absolute maximum ratings listed in **Table 1** may cause permanent damage. Operation should be restricted to the limits in **Table 2**. Operation between operating range maximum and absolute maximum for extended periods may reduce reliability.

ESD Precautions

When handling this UltraCMOS device, observe the same precautions as with any other ESD-sensitive devices. Although this device contains circuitry to protect it from damage due to ESD, precautions should be taken to avoid exceeding the rating specified in **Table 1**.

Latch-up Immunity

Unlike conventional CMOS devices, UltraCMOS devices are immune to latch-up.

Table 1 • Absolute Maximum Ratings for PE43711

| Parameter/Condition | Min | Max | Unit |
|---|------|-----------------|------------|
| Supply voltage, V_{DD} | -0.3 | 5.5 | V |
| Digital input voltage | -0.3 | 3.6 | V |
| RF input power, 50Ω 9 kHz–48 MHz >48 MHz–6 GHz | | Figure 5 +31 | dBm dBm |
| Storage temperature range | -65 | +150 | °C |
| ESD voltage HBM, all pins ⁽¹⁾ | | 3000 | V |
| ESD voltage CDM, all pins ⁽²⁾ | | 1000 | V |
| Notes: 1) Human body model (MIL-STD 883 Method 3015). 2) Charged device model (JEDEC JESD22-C101). | | | |

Recommended Operating Conditions

Table 2 lists the recommending operating condition for the PE43711. Devices should not be operated outside the recommended operating conditions listed below.

Table 2 • Recommended Operating Condition for PE43711

| Parameter | Min | Typ | Max | Unit |
|---|------|-----|-----------------|------------|
| Supply voltage, V_{DD} | 2.3 | | 5.5 | V |
| Supply current, I_{DD} | | 150 | 200 | μ A |
| Digital input high | 1.17 | | 3.6 | V |
| Digital input low | -0.3 | | 0.6 | V |
| Digital input current | | | 17.5 | μ A |
| RF input power, CW ⁽¹⁾ 9 kHz–48 MHz >48 MHz–6 GHz | | | Figure 5 +23 | dBm dBm |
| RF input power, pulsed ⁽²⁾ 9 kHz–48 MHz >48 MHz–6 GHz | | | Figure 5 +28 | dBm dBm |
| Operating temperature range | -40 | +25 | +105 | °C |
| Notes: 1) 100% duty cycle, all bands, 50 Ω . 2) Pulsed, 5% duty cycle of 4620 μ s period, 50 Ω . | | | | |

Electrical Specifications

Table 3 provides the PE43711 key electrical specifications at 25 °C, $V_{DD} = 3.3V$, $RF1 = RF_{IN}$, $RF2 = RF_{OUT}$ ($Z_S = Z_L = 50\Omega$), unless otherwise specified.

Table 3 • PE43711 Electrical Specifications

| Parameter | Condition | Frequency | Min | Typ | Max | Unit |
|---------------------|---------------------------|---------------|-------|---------|---|----------|
| Operating frequency | | | 9 kHz | | 6 GHz | As shown |
| Attenuation range | 0.25 dB step | | | 0–31.75 | | dB |
| | 0.5 dB step | | | 0–31.50 | | dB |
| | 1 dB step | | | 0–31.00 | | dB |
| Insertion loss | | 9 kHz–1.0 GHz | | 1.3 | 1.5 | dB |
| | | 1.0–2.2 GHz | | 1.6 | 1.85 | dB |
| | | 2.2–4.0 GHz | | 1.9 | 2.4 | dB |
| | | 4.0–6.0 GHz | | 2.4 | 2.8 | dB |
| Attenuation error | 0.25 dB step | | | | | |
| | 0–31.75 dB | 9 kHz–2.2 GHz | | | $\pm(0.15 + 1.5\%$ of attenuation setting) | dB |
| | 0–31.75 dB | >2.2–3.0 GHz | | | $\pm (0.15 + 2.5\%$ of attenuation setting) | dB |
| | 0–31.75 dB | >3.0–4.0 GHz | | | $\pm (0.25 + 3.5\%$ of attenuation setting) | dB |
| | 0.5 dB step | | | | | |
| | 0–31.5 dB | 9 kHz–2.2 GHz | | | $\pm (0.15 + 1.5\%$ of attenuation setting) | dB |
| | 0–31.5 dB | >2.2–3.0 GHz | | | $\pm (0.15 + 2.5\%$ of attenuation setting) | dB |
| | 0–31.5 dB | >3.0–5.0 GHz | | | $\pm (0.25 + 3.5\%$ of attenuation setting) | dB |
| | 1 dB step | | | | | |
| | 0–31 dB | 9 kHz–2.2 GHz | | | $\pm (0.15 + 1.5\%$ of attenuation setting) | dB |
| | 0–31 dB | >2.2–3.0 GHz | | | $\pm (0.15 + 2.5\%$ of attenuation setting) | dB |
| | 0–31 dB | >3.0–5.0 GHz | | | $\pm (0.25 + 3.5\%$ of attenuation setting) | dB |
| | 0–31 dB | >5.0–6.0 GHz | | | $\pm (0.25 + 6.0\%$ of attenuation setting) | dB |
| Return loss | Input port or output port | 9 kHz–4 GHz | | 14 | | dB |
| | | 4–6 GHz | | 16 | | dB |

Table 3 • PE43711 Electrical Specifications (Cont.)

| Parameter | Condition | Frequency | Min | Typ | Max | Unit |
|---|---|------------------------|-----|----------|-----|------------|
| Relative phase | All states | 9 kHz–4 GHz 4–6 GHz | | 31 48 | | deg deg |
| Input 0.1dB compression point(*) | | 48 MHz–6 GHz | | 31 | | dBm |
| Input IP3 | Two tones at +18 dBm, 20 MHz spacing | 4 GHz 6 GHz | | 57 56 | | dBm dBm |
| RF T _{rise} /T _{fall} | 10%/90% RF | | | 200 | | ns |
| Settling time | RF settled to within 0.05 dB of final value | | | 1.6 | | μs |
| Switching time | 50% CTRL to 90% or 10% RF | | | 275 | | ns |
| Attenuation transient (envelope) | | 2 GHz | | 0.3 | | dB |

Note: * The input 0.1dB compression point is a linearity figure of merit. Refer to Table 2 for the operating RF input power (50Ω).

Switching Frequency

The PE43711 has a maximum 25 kHz switching rate.

Switching frequency is defined to be the speed at which the DSA can be toggled across attenuation states. Switching time is the time duration between the point the control signal reaches 50% of the final value and the point the output signal reaches within 10% or 90% of its target value.

Spurious Performance

The typical spurious performance of the PE43711 is -130 dBm.

Glitch-less Attenuation State Transitions

The PE43711 features a novel architecture to provide the best-in-class glitch-less transition behavior when changing attenuation states. When RF input power is applied, the output power spikes are greatly reduced (≤ 0.3 dB) during attenuation state changes when comparing to previous generations of DSAs.

Truth Tables

Table 4–Table 5 provide the truth tables for the PE43711.

Table 4 • *Parallel Truth Table*

| Parallel Control Setting | | | | | | | Attenuation Setting RF1–RF2 |
|--------------------------|----|----|----|----|----|----|--------------------------------|
| D6 | D5 | D4 | D3 | D2 | D1 | D0 | |
| L | L | L | L | L | L | L | Reference IL |
| L | L | L | L | L | L | H | 0.25 dB |
| L | L | L | L | L | H | L | 0.5 dB |
| L | L | L | L | H | L | L | 1 dB |
| L | L | L | H | L | L | L | 2 dB |
| L | L | H | L | L | L | L | 4 dB |
| L | H | L | L | L | L | L | 8 dB |
| H | L | L | L | L | L | L | 16 dB |
| H | H | H | H | H | H | H | 31.75 dB |


Table 5 • *Serial Attenuation Word Truth Table*

| Attenuation Word | | | | | | | | Attenuation Setting RF1–RF2 |
|------------------|----|----|----|----|----|----|-------------|--------------------------------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 (LSB) | |
| L | L | L | L | L | L | L | L | Reference IL |
| L | L | L | L | L | L | L | H | 0.25 dB |
| L | L | L | L | L | L | H | L | 0.5 dB |
| L | L | L | L | L | H | L | L | 1 dB |
| L | L | L | L | H | L | L | L | 2 dB |
| L | L | L | H | L | L | L | L | 4 dB |
| L | L | H | L | L | L | L | L | 8 dB |
| L | H | L | L | L | L | L | L | 16 dB |
| L | H | H | H | H | H | H | H | 31.75 dB |

Serial Register Map

Figure 2 provides the Serial register map for the PE43711.

Figure 2 • *Serial Register Map*

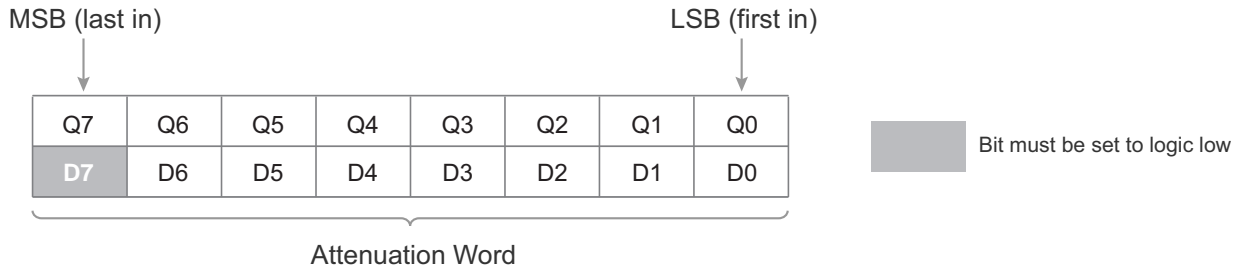

The attenuation word is derived directly from the value of the attenuation state. To find the attenuation word, multiply the value of the state by four, then convert to binary.

For example, to program the 12.5 dB state:

$$4 \times 12.5 = 50$$

$$50 \rightarrow 00110010$$

Serial Input: 00110010

Programming Options

Parallel/Serial Selection

Either a Parallel or Serial interface can be used to control the PE43711. The $\overline{P/S}$ bit provides this selection, with $\overline{P/S} = \text{LOW}$ selecting the Parallel interface and $\overline{P/S} = \text{HIGH}$ selecting the Serial interface.

Parallel Mode Interface

The Parallel interface consists of seven CMOS-compatible control lines that select the desired attenuation state, as shown in **Table 4**.

The Parallel interface timing requirements are defined by **Figure 4** (Parallel Interface Timing Diagram), **Table 8** (Parallel and Direct Interface AC Characteristics) and switching time (**Table 3**).

For Latched Parallel programming, the Latch Enable (LE) should be held LOW while changing attenuation state control values then pulse LE HIGH to LOW (per **Figure 4**) to latch new attenuation state into the device.

For Direct Parallel programming, the LE line should be pulled HIGH. Changing attenuation state control values will change device state to new attenuation. Direct mode is ideal for manual control of the device (using hardwire, switches or jumpers).

Serial Interface

The Serial interface is an 8-bit Serial-In, Parallel-Out shift register buffered by a transparent latch. The 8-bits make up the Attenuation Word that controls the DSA. **Figure 3** illustrates an example timing diagram for programming a state.

The Serial interface is controlled using three CMOS-compatible signals: SI, Clock (CLK) and LE. The SI and CLK inputs allow data to be serially entered into the shift register. Serial data is clocked in LSB first.

The shift register must be loaded while LE is held LOW to prevent the attenuator value from changing as data is entered. The LE input should then be toggled HIGH and brought LOW again, latching the new data into the DSA. The Attenuation Word truth table is listed in **Table 5**. A programming example of the serial register is illustrated in **Figure 2**. The Serial timing diagram is illustrated in **Figure 3**. It is required

that all Parallel control inputs be grounded when the DSA is used in Serial mode.

Power-up Control Settings

The PE43711 will always initialize to the maximum attenuation setting (31.75 dB) on power-up for both the Serial and Latched Parallel modes of operation and will remain in this setting until the user latches in the next programming word. In Direct Parallel mode, the DSA can be preset to any state within the 31.75 dB range by pre-setting the Parallel control pins prior to power-up. In this mode, there is a 400 μs delay between the time the DSA is powered-up to the time the desired state is set. During this power-up delay, the device attenuates to the maximum attenuation setting (31.75 dB) before defaulting to the user defined state. If the control pins are left floating in this mode during power-up, the device will default to the minimum attenuation setting (insertion loss state).

Dynamic operation between Serial and Parallel programming modes is possible.

If the DSA powers up in Serial mode ($\overline{P/S} = \text{HIGH}$), all the Parallel control inputs DI[6:0] must be set to logic LOW. Prior to toggling to Parallel mode, the DSA must be programmed serially to ensure D[7] is set to logic LOW.

If the DSA powers up in either Latched or Direct Parallel mode, all Parallel pins DI[6:0] must be set to logic LOW prior to toggling to Serial mode ($\overline{P/S} = \text{HIGH}$), and held LOW until the DSA has been programmed serially to ensure bit D[7] is set to logic LOW.

The sequencing is only required once on power-up. Once completed, the DSA may be toggled between Serial and Parallel programming modes at will.

Figure 3 • Serial Timing Diagram

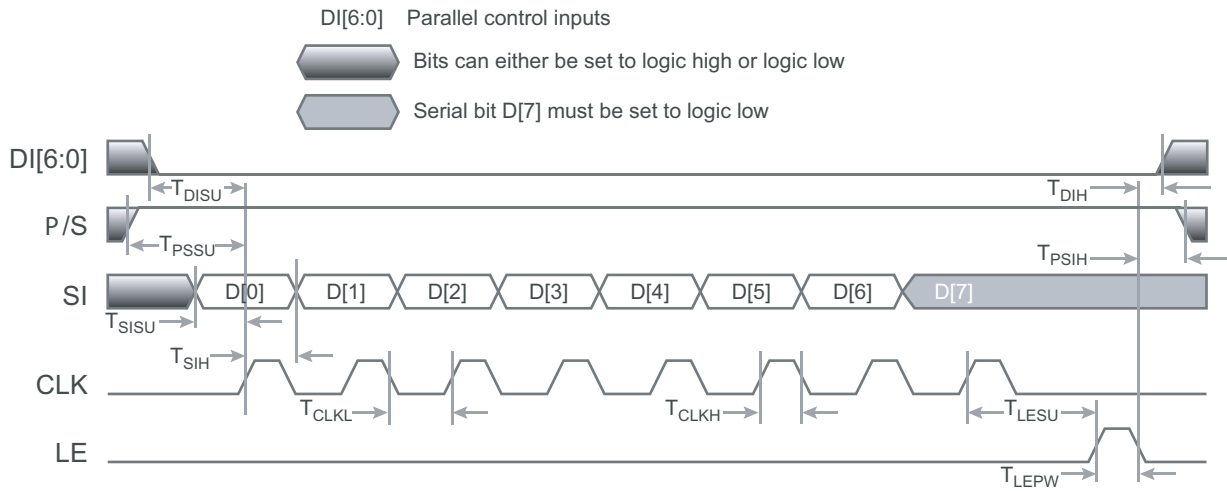


Figure 4 • Latched Parallel/Direct Parallel Timing Diagram

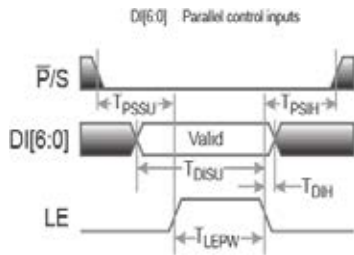


Table 6 • Latch and Clock Specifications

| Latch Enable | Shift Clock | Function |
|--------------|-------------|---|
| 0 | ↑ | Shift register clocked |
| ↑ | X | Contents of shift register transferred to attenuator core |


Table 7 • Serial Interface AC Characteristics^(*)

| Parameter/Condition | Min | Max | Unit |
|---|-----|-----|------|
| Serial clock frequency, F_{CLK} | | 10 | MHz |
| Serial clock HIGH time, T_{CLKH} | 30 | | ns |
| Serial clock LOW time, T_{CLKL} | 30 | | ns |
| Last Serial clock rising edge setup time to Latch Enable rising edge, T_{LESU} | 10 | | ns |
| Latch Enable minimum pulse width, T_{LEPW} | 30 | | ns |
| Serial data setup time, T_{SISU} | 10 | | ns |
| Serial data hold time, T_{SIH} | 10 | | ns |
| Parallel data setup time, T_{DISU} | 100 | | ns |
| Parallel data hold time, T_{DIH} | 100 | | ns |
| Address setup time, T_{ASU} | 100 | | ns |
| Address hold time, T_{AH} | 100 | | ns |
| Parallel/Serial setup time, T_{PSSU} | 100 | | ns |
| Parallel/Serial hold time, T_{PSIH} | 100 | | ns |
| Note: * $V_{DD} = 3.3V$ or $5.0V$, $-40\text{ }^{\circ}\text{C} < T_A < +105\text{ }^{\circ}\text{C}$, unless otherwise specified. | | | |

Table 8 • Parallel and Direct Interface AC Characteristics^(*)

| Parameter/Condition | Min | Max | Unit |
|---|-----|-----|------|
| Latch Enable minimum pulse width, T_{LEPW} | 30 | | ns |
| Parallel data setup time, T_{DISU} | 100 | | ns |
| Parallel data hold time, T_{DIH} | 100 | | ns |
| Parallel/Serial setup time, T_{PSSU} | 100 | | ns |
| Parallel/Serial hold time, T_{PSIH} | 100 | | ns |
| Note: * $V_{DD} = 3.3V$ or $5.0V$, $-40\text{ }^{\circ}\text{C} < T_A < +105\text{ }^{\circ}\text{C}$, unless otherwise specified. | | | |

Figure 5 • Power De-rating Curve, 9 kHz–6 GHz, –40 to +105 °C Ambient, 50Ω

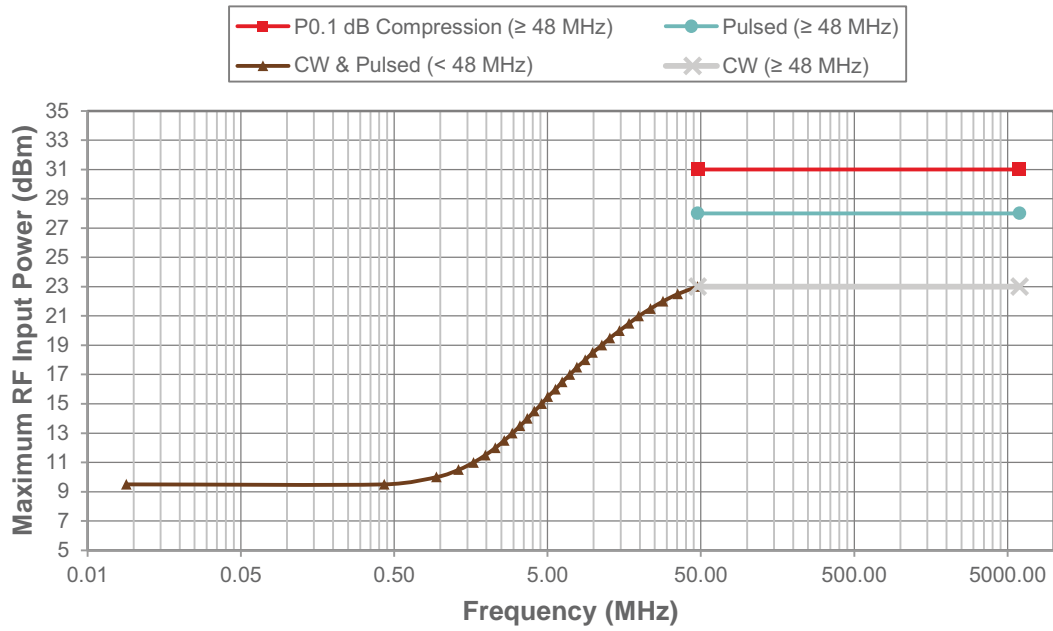

Typical Performance Data

Figure 6–Figure 32 show the typical performance data at 25 °C and $V_{DD} = 3.3V$, $RF1 = RF_{IN}$, $RF2 = RF_{OUT}$ ($Z_S = Z_L = 50\Omega$) unless otherwise specified.

Figure 6 • *Insertion Loss vs Temperature*

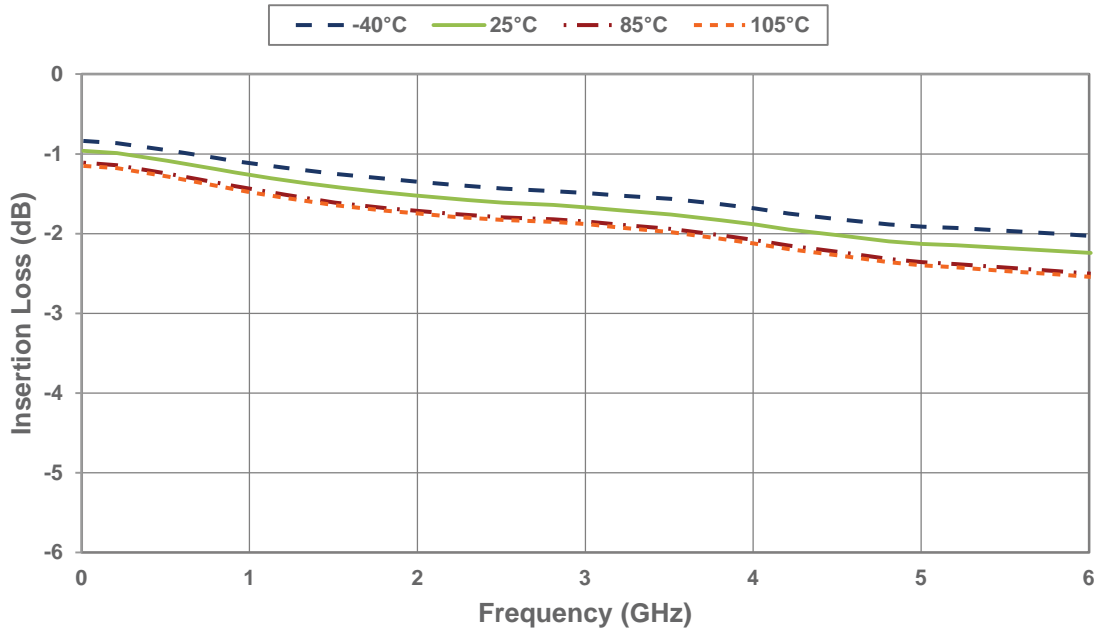


Figure 7 • *Input Return Loss vs Attenuation Setting*

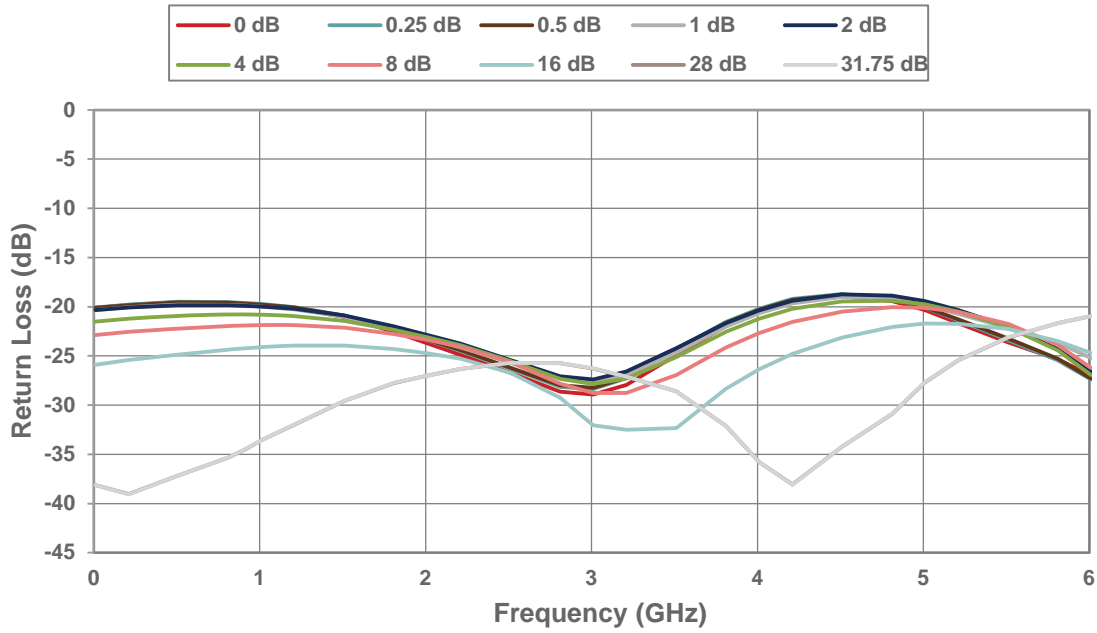


Figure 8 • *Output Return Loss vs Attenuation Setting*

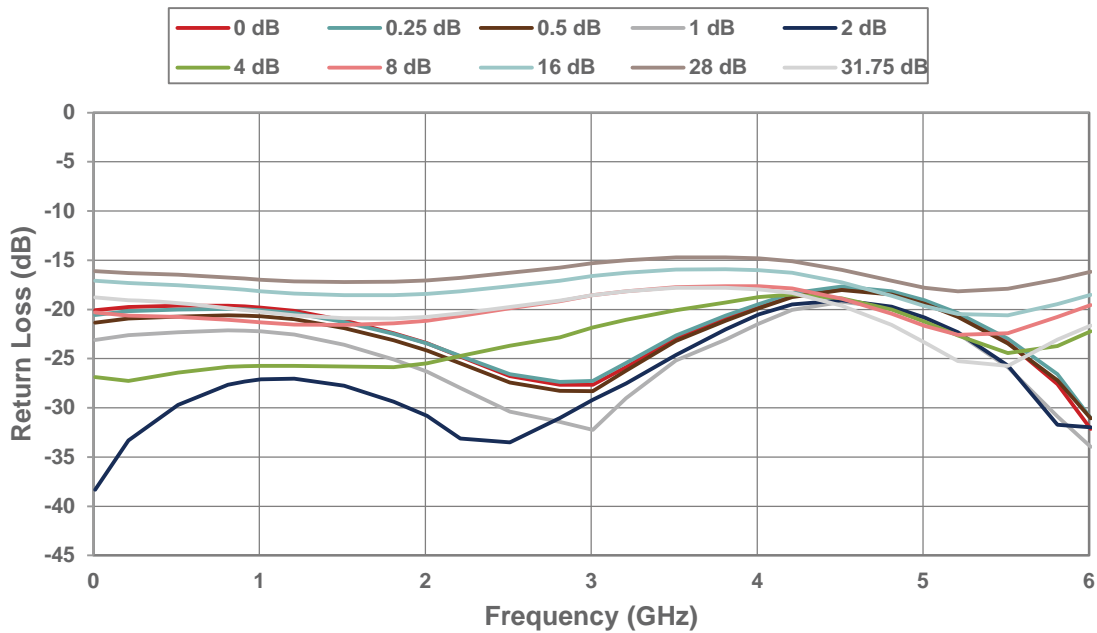


Figure 9 • Input Return Loss for 16 dB Attenuation Setting vs Temperature

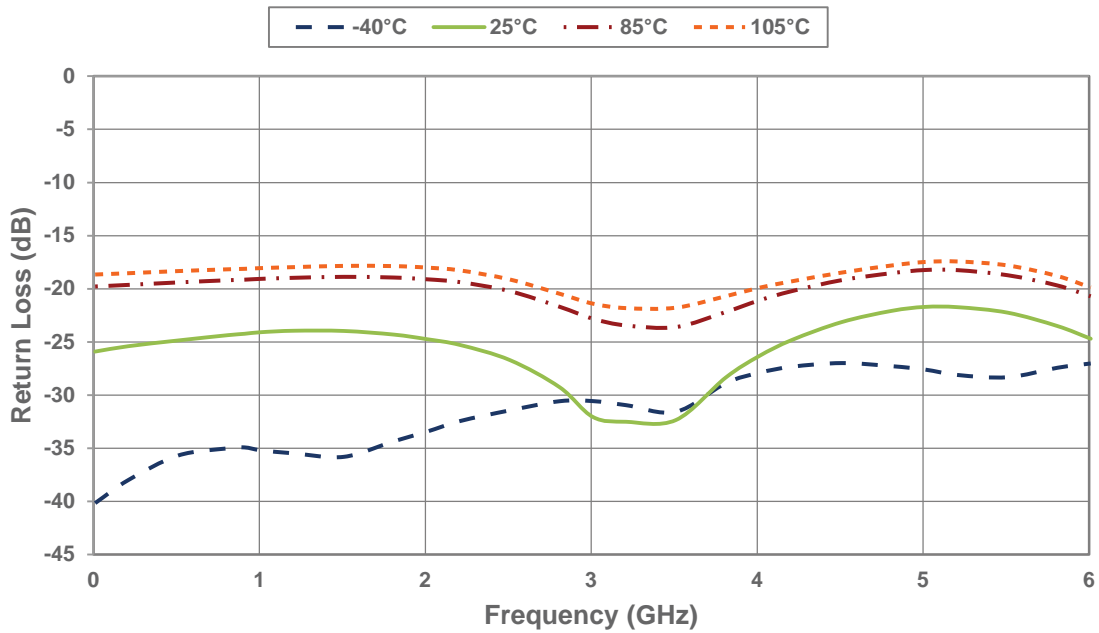


Figure 10 • Output Return Loss for 16 dB Attenuation Setting vs Temperature

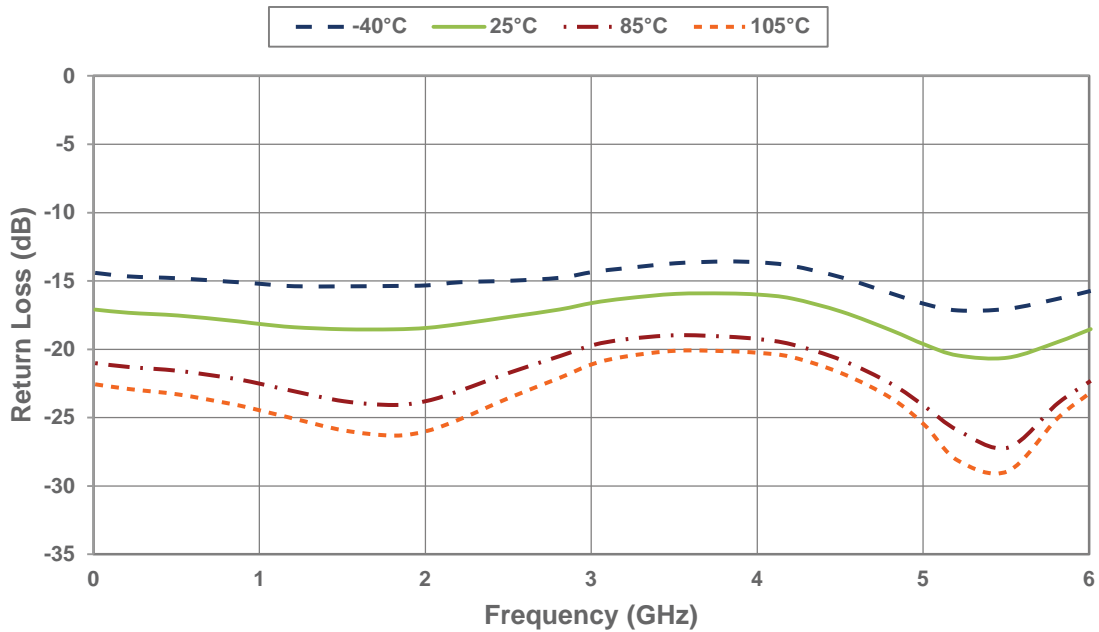


Figure 11 • Relative Phase Error vs Attenuation Setting

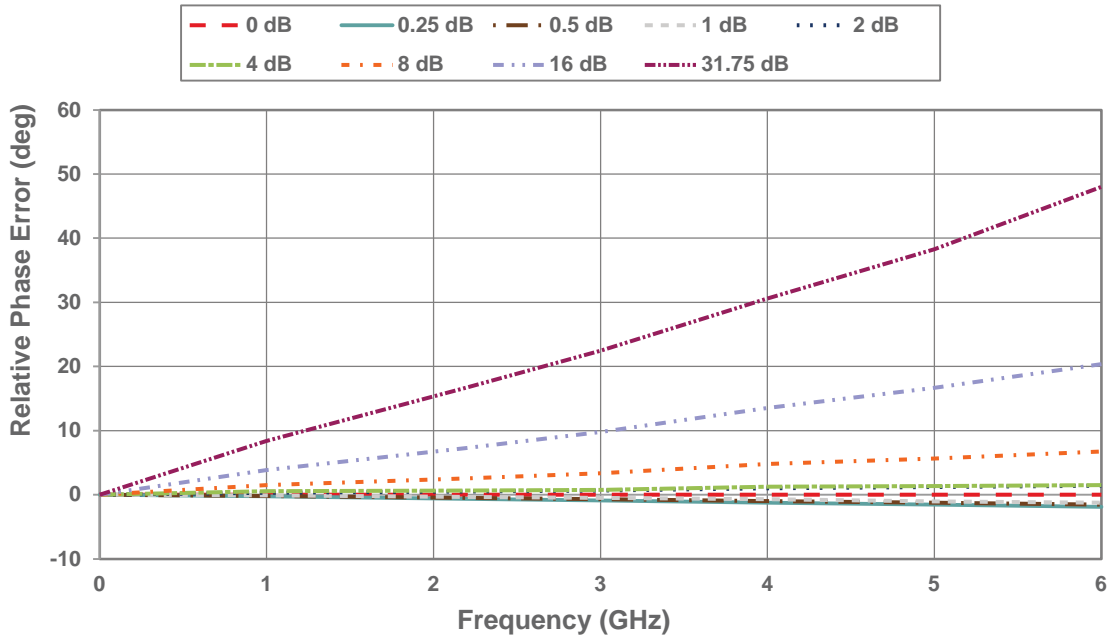


Figure 12 • Relative Phase Error for 31.75 dB Attenuation Setting vs Frequency

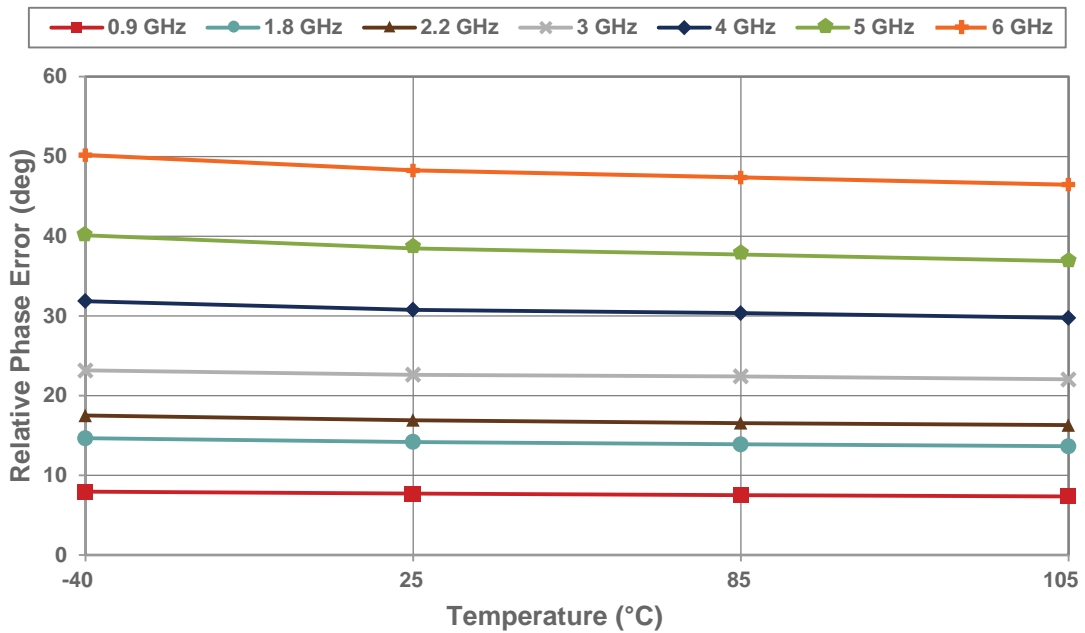


Figure 13 • Attenuation Error @ 900 MHz vs Temperature

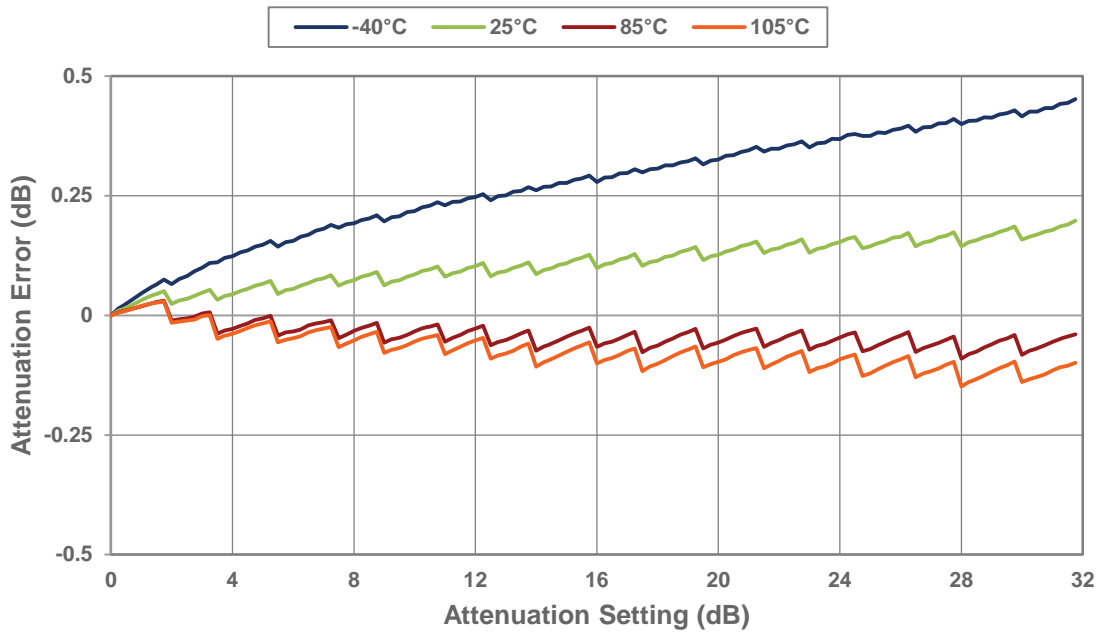


Figure 14 • Attenuation Error @ 1800 MHz vs Temperature

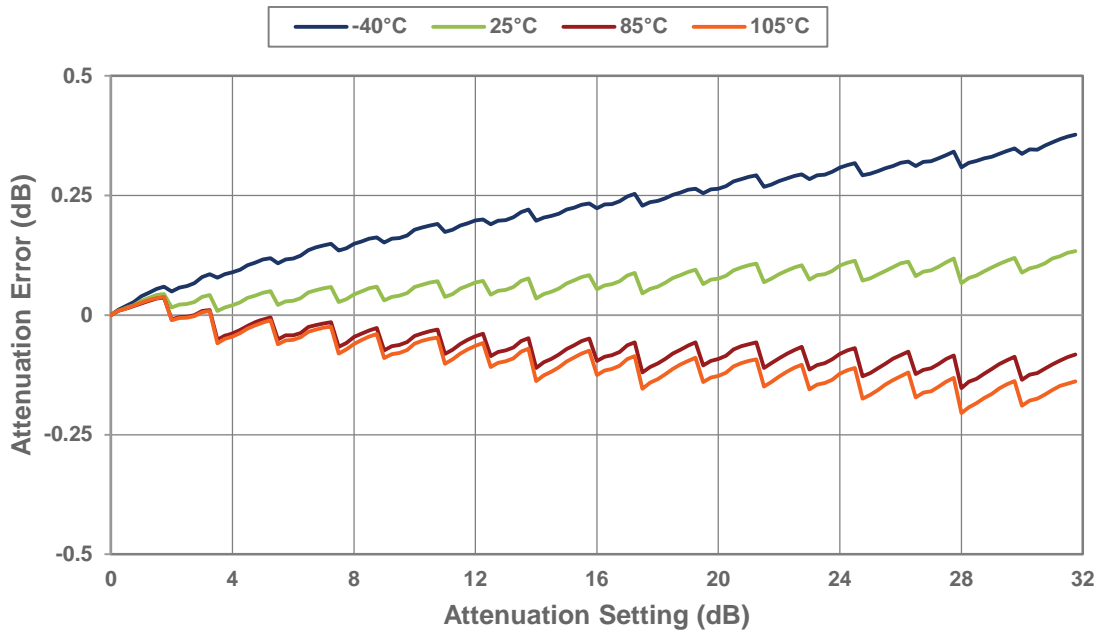


Figure 15 • Attenuation Error @ 2200 MHz vs Temperature

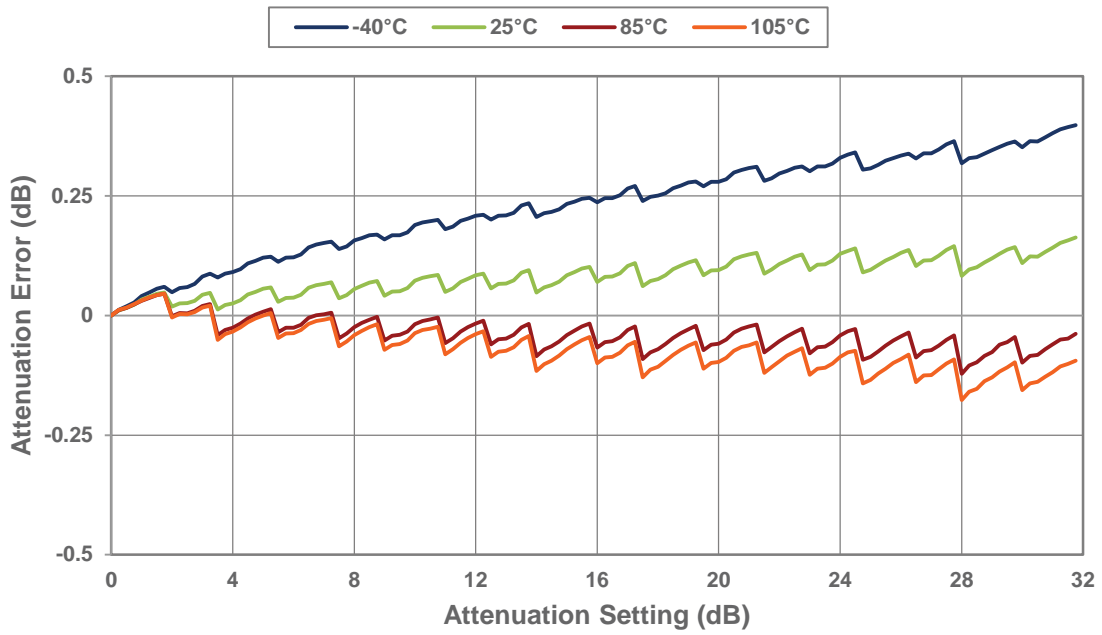


Figure 16 • Attenuation Error @3000 MHz vs Temperature

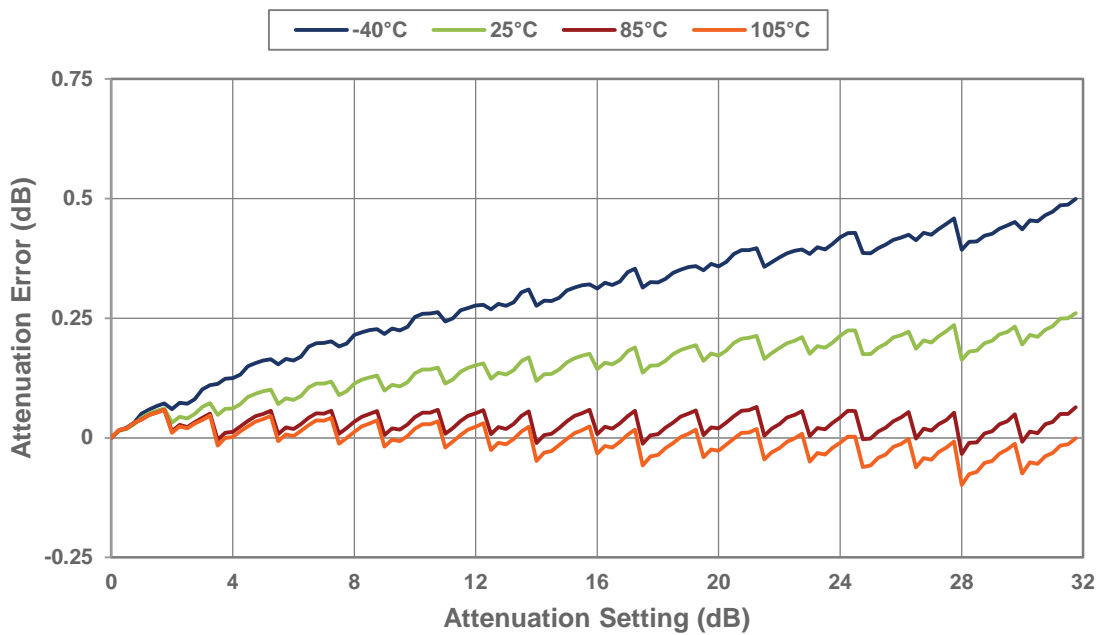


Figure 17 • Attenuation Error @ 4000 MHz vs Temperature

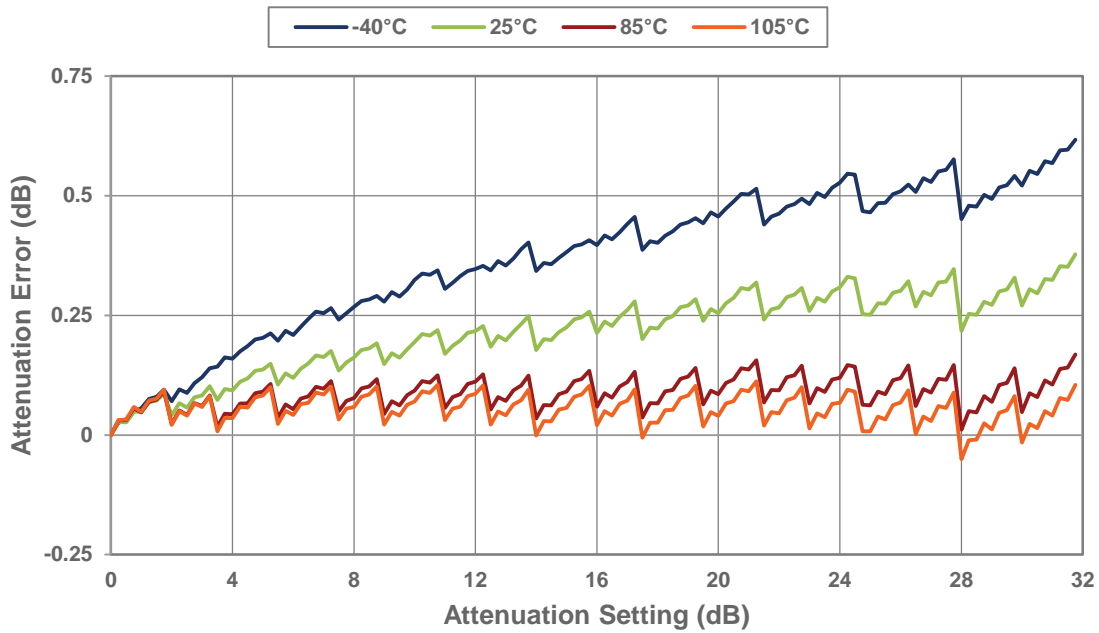


Figure 18 • IIP3 vs Attenuation Setting


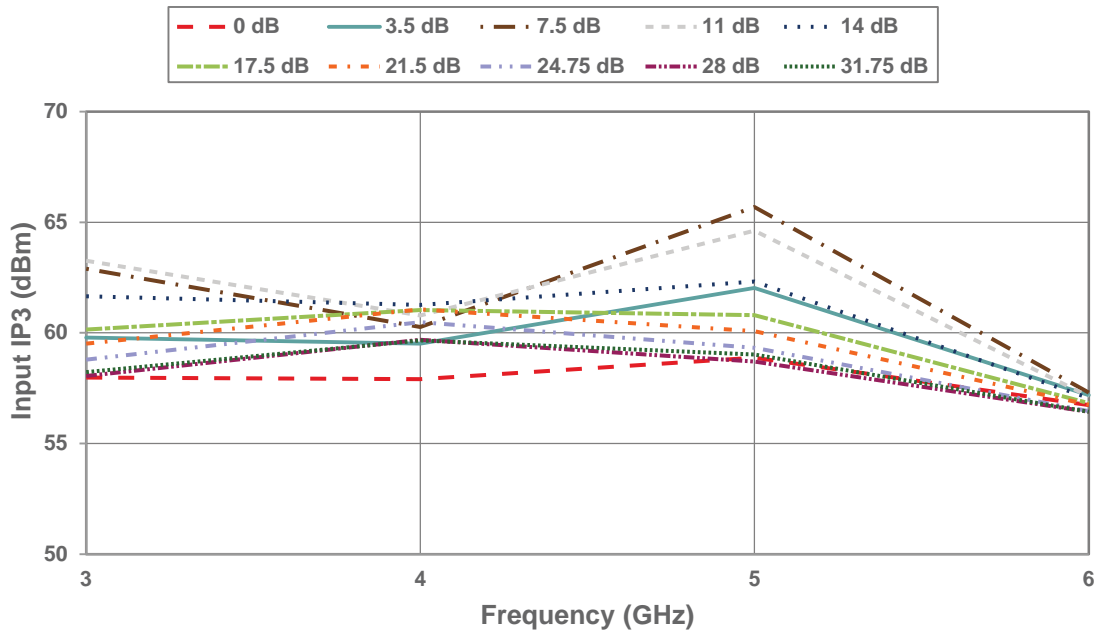


Figure 19 • 0.25 dB Step Attenuation vs Frequency^(*)

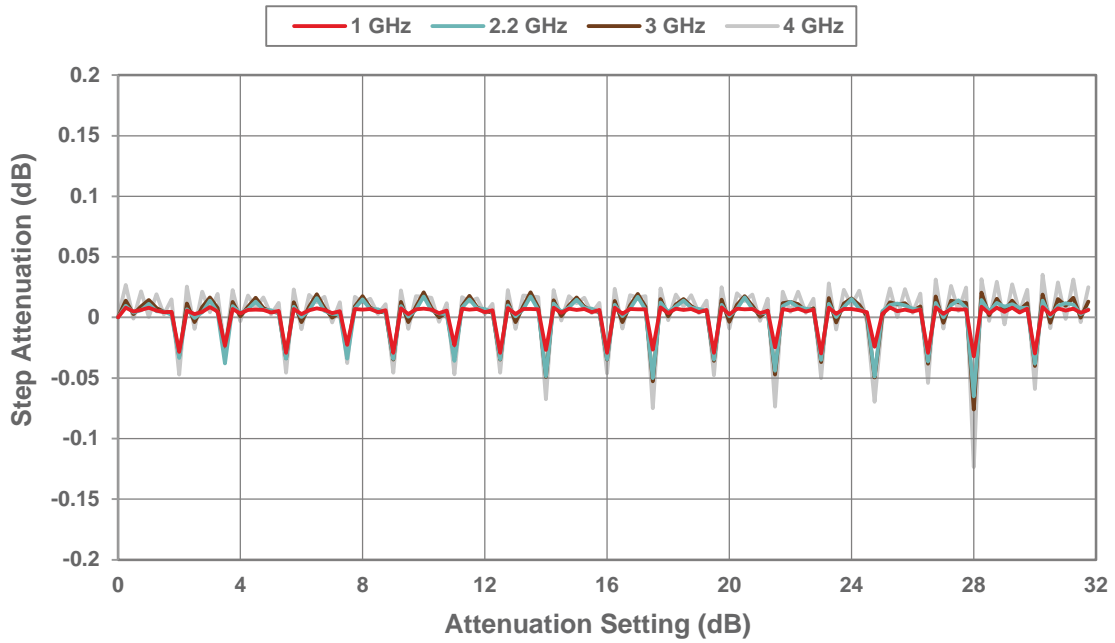

Note: * Monotonicity is held so long as step attenuation does not cross below -0.25 dB.

Figure 20 • 0.25 dB Step, Actual vs Frequency

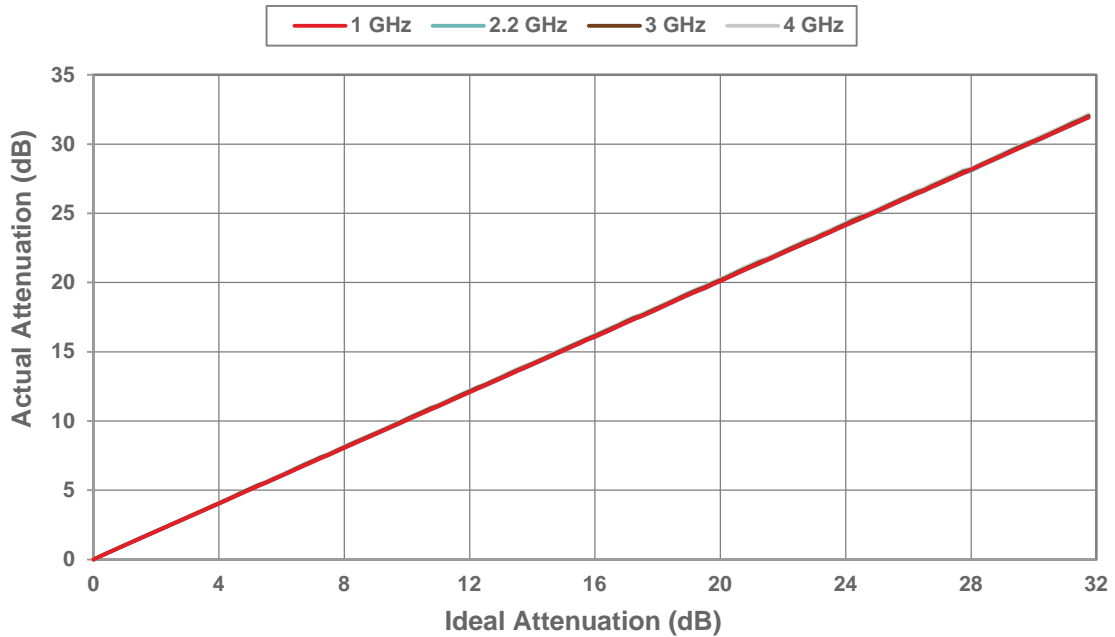


Figure 21 • 0.25 dB Major State Bit Error vs Attenuation Setting

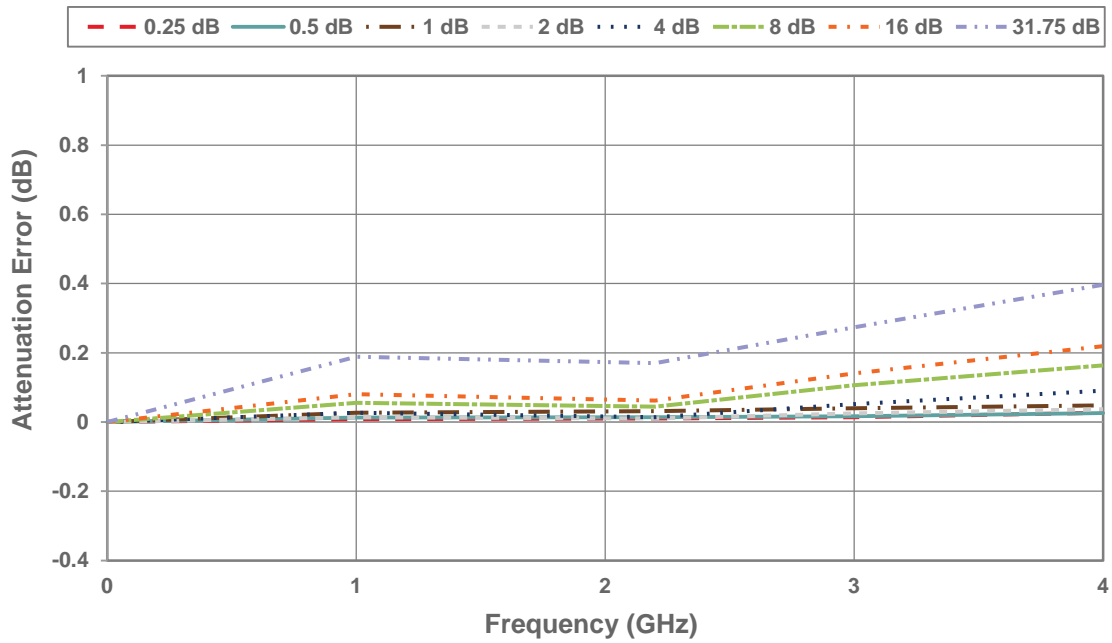


Figure 22 • 0.25 dB Attenuation Error vs Frequency


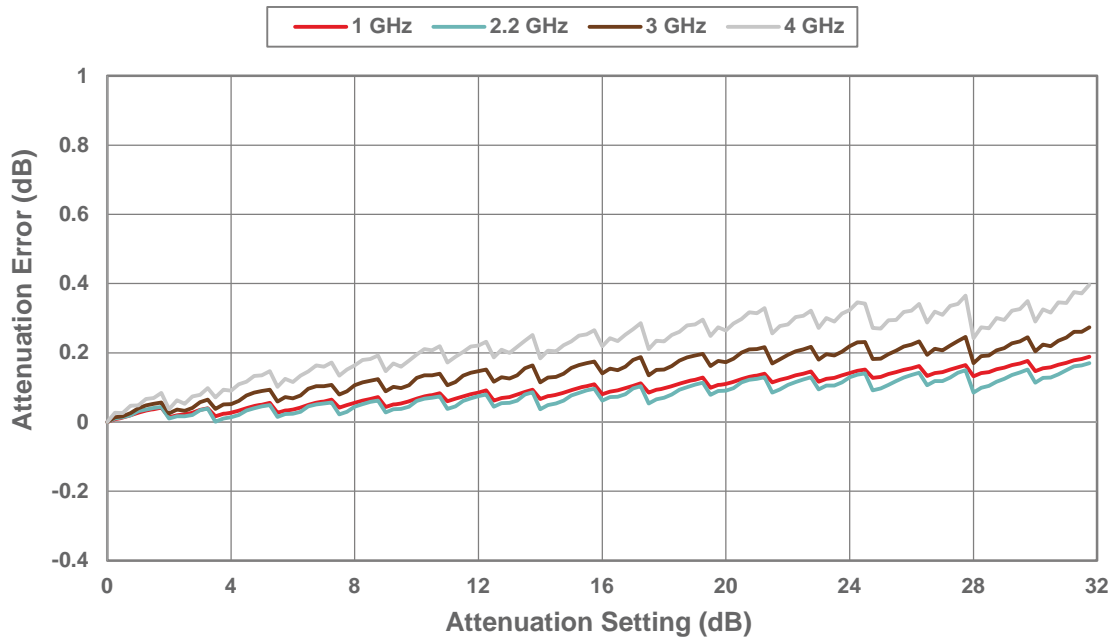


Figure 23 • 0.5 dB Step Attenuation vs Frequency^(*)

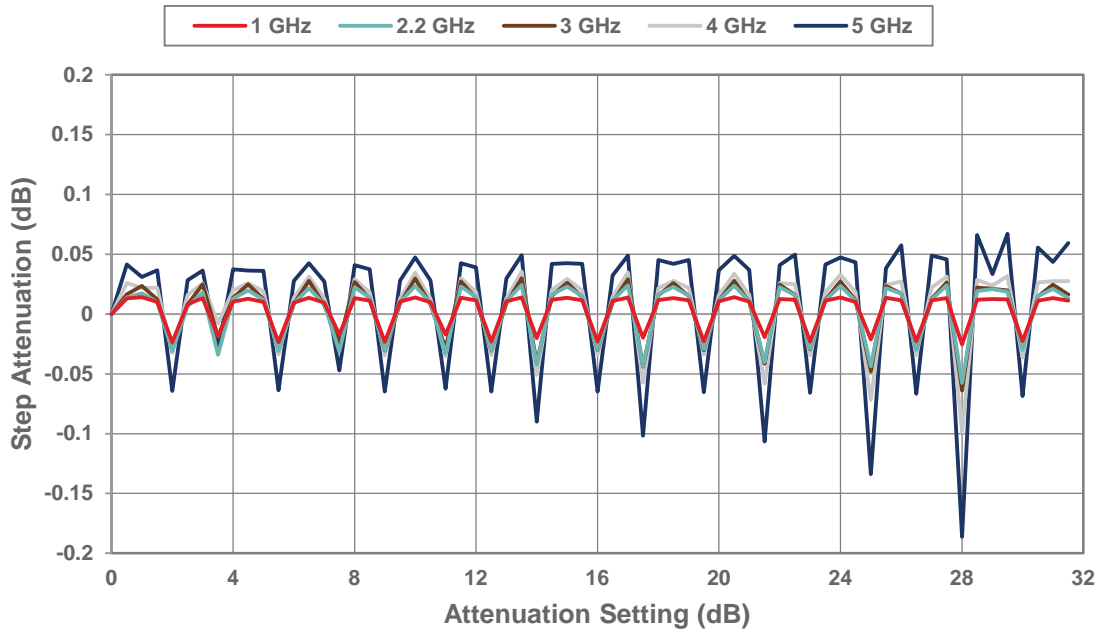

Note: * Monotonicity is held so long as step attenuation does not cross below -0.5 dB.

Figure 24 • 0.5 dB Step, Actual vs Frequency

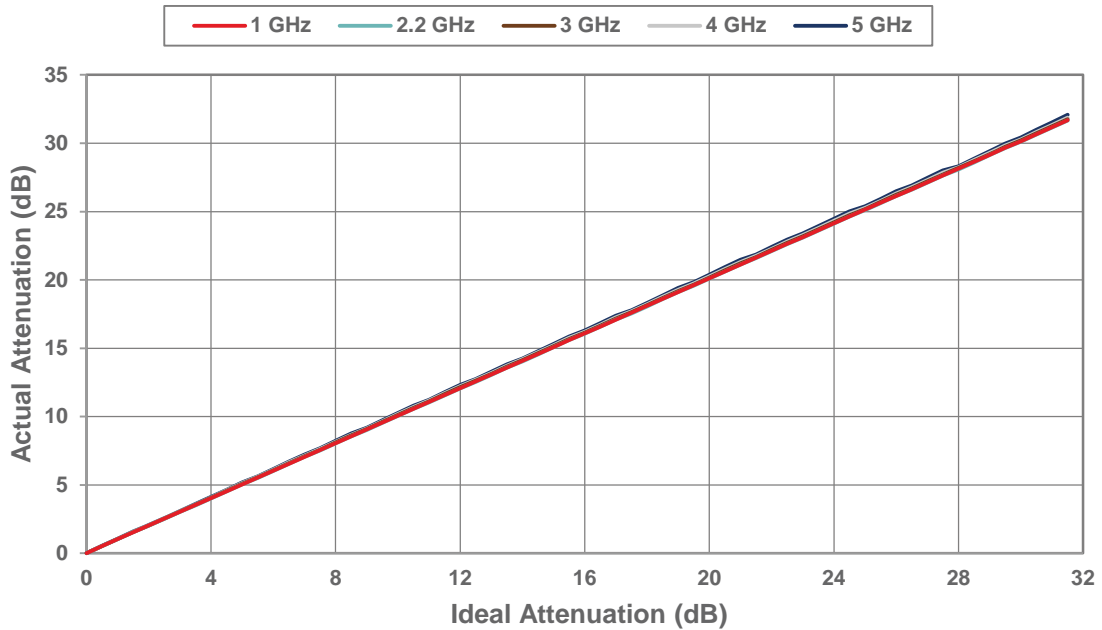


Figure 25 • 0.5 dB Major State Bit Error vs Attenuation Setting

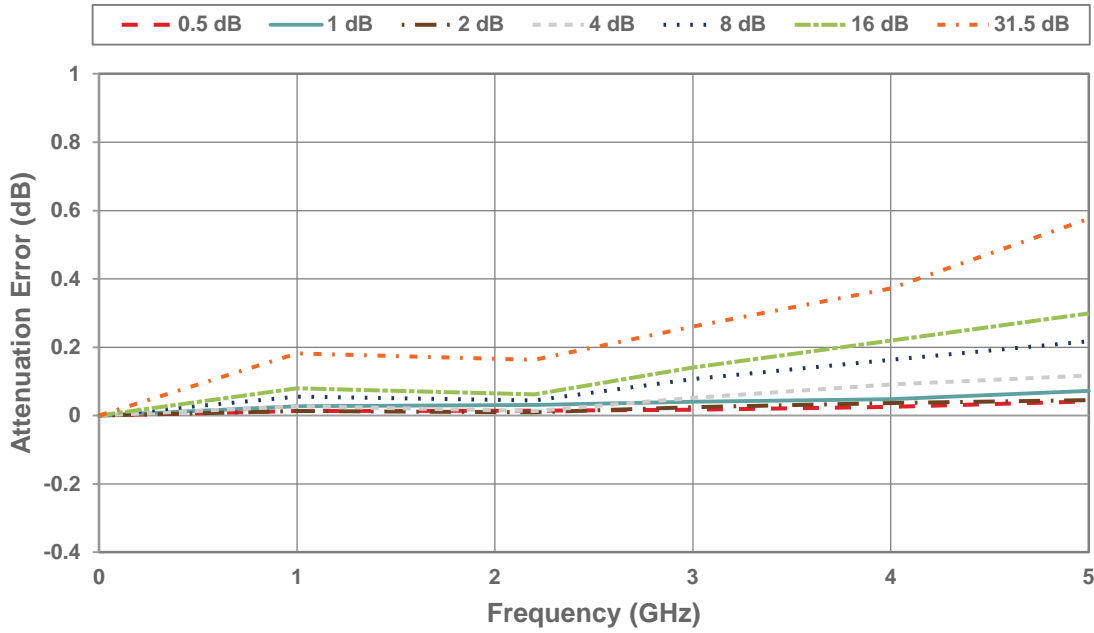


Figure 26 • 0.5 dB Attenuation Error vs Frequency


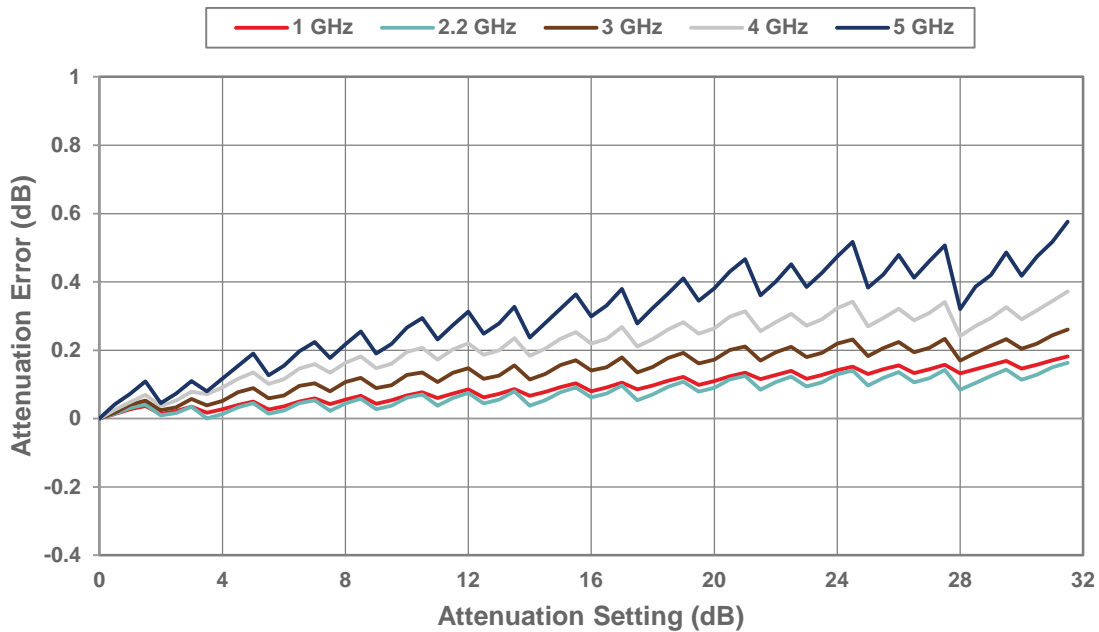


Figure 27 • 1 dB Step Attenuation vs Frequency^(*)

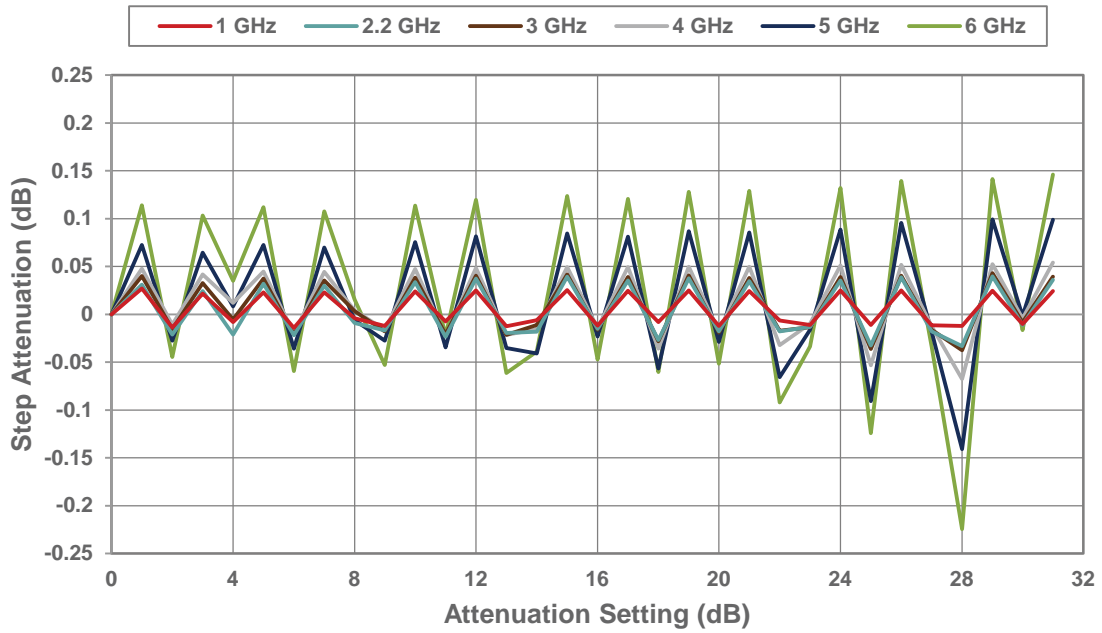

Note: * Monotonicity is held so long as step attenuation does not cross below -1 dB.

Figure 28 • 1 dB Step, Actual vs Frequency

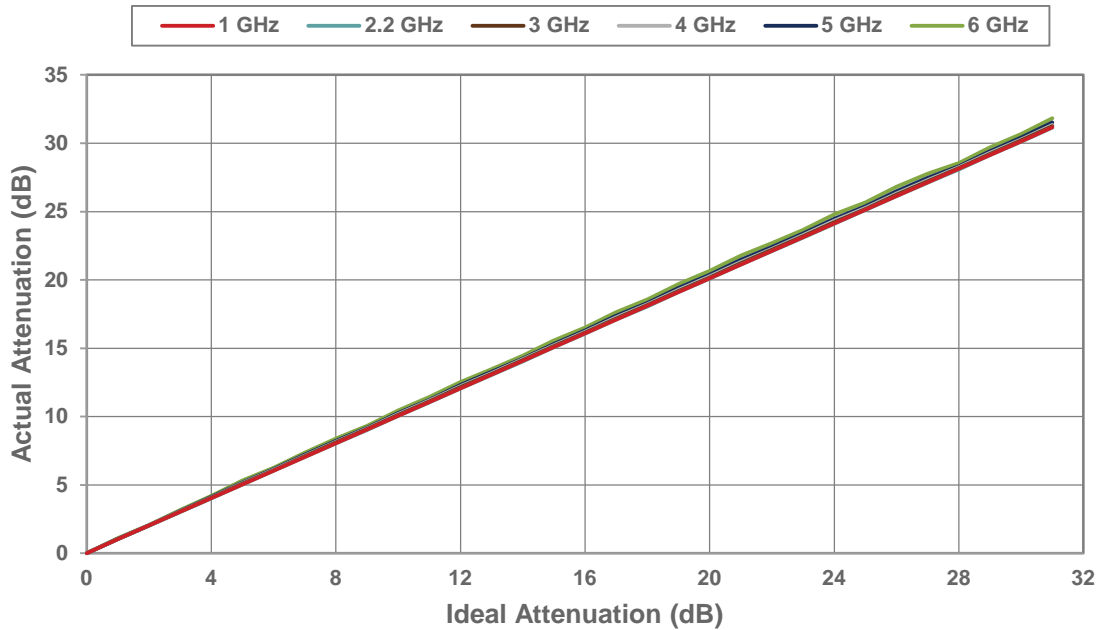


Figure 29 • 1 dB Major State Bit Error vs Attenuation Setting

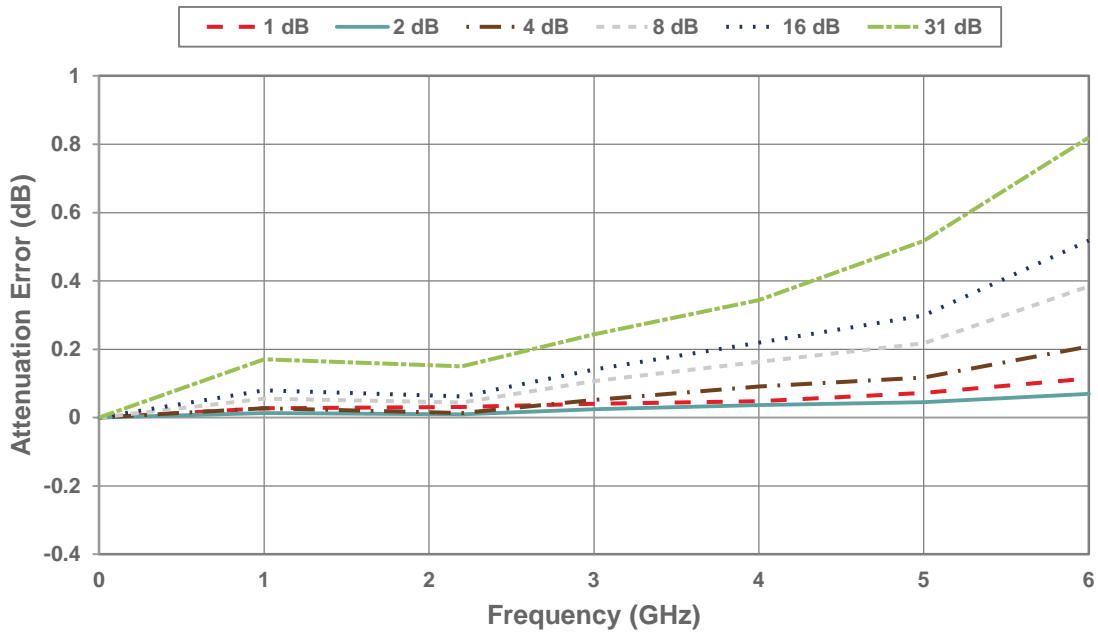


Figure 30 • 1 dB Attenuation Error vs Frequency

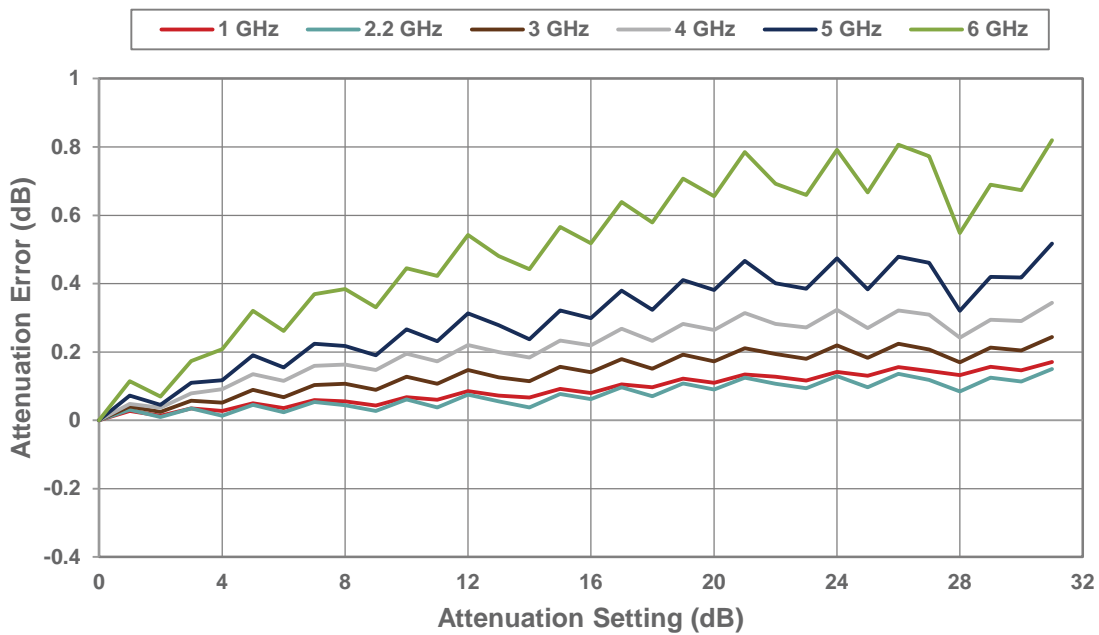


Figure 31 • Attenuation Transient (15.75–16 dB), Typical Switching Time = 275 ns


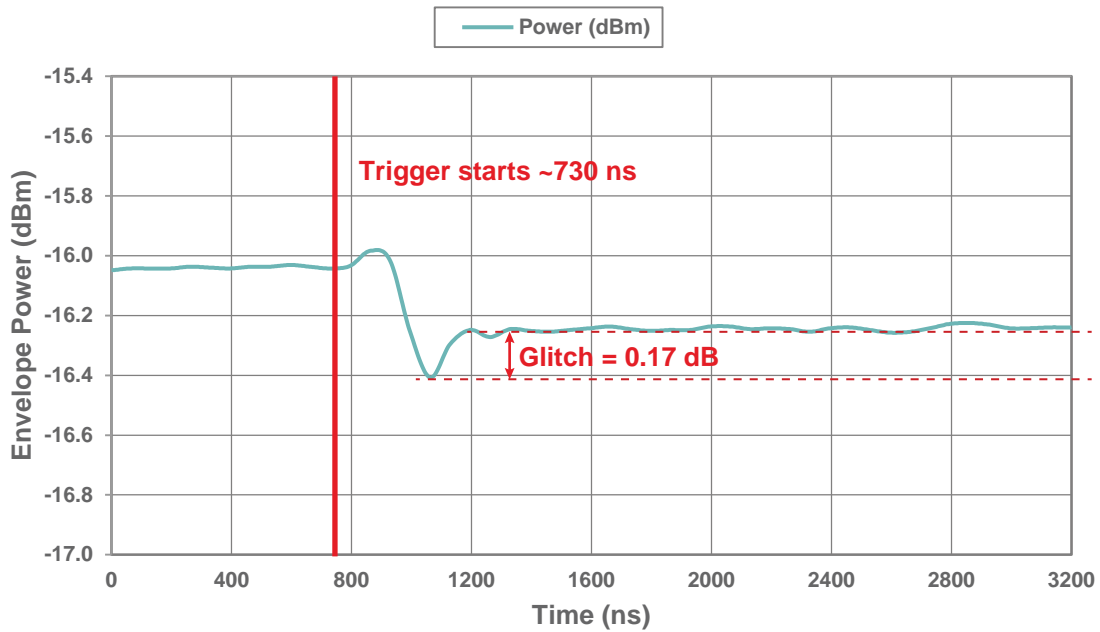


Figure 32 • Attenuation Transient (16–15.75 dB), Typical Switching Time = 275 ns

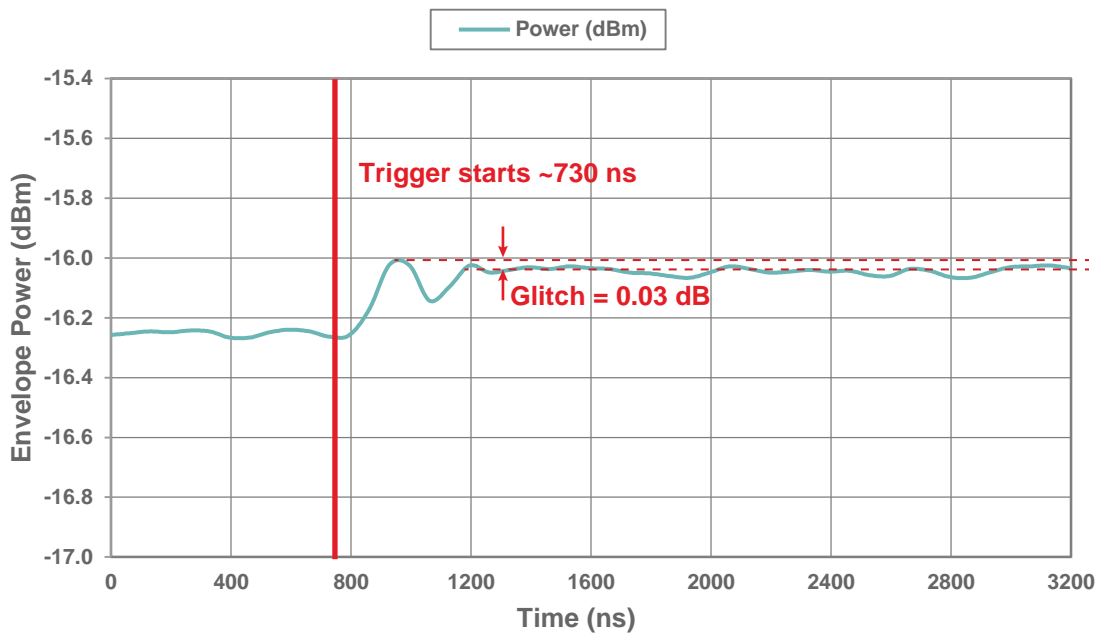

Evaluation Kit

The digital step attenuator evaluation board (EVB) was designed to ease customer evaluation of the PE43711 digital step attenuator. The PE43711 EVB supports Direct Parallel, Latched Parallel and Serial modes.

Evaluation Kit Setup

Connect the EVB with the USB dongle board and USB cable as shown in **Figure 33**.

Direct Parallel Programming Procedure

Direct Parallel programming is suitable for manual operation without software programming. For manual Direct Parallel programming, position the Parallel/Serial (P/S) select switch to the Parallel position. The LE switch must be switched to HIGH position. Switches D0–D6 are SP3T switches that enable the user to manually program the parallel bits. When D0–D6 are toggled to the HIGH position, logic high is presented to the parallel input. When toggled to the LOW position, logic low is presented to the parallel input. Setting LE and D0–D6 to the EXT position presents as OPEN, which is set for software programming of Latched Parallel and Serial modes. **Table 4** depicts the Parallel truth table.

Figure 33 • Evaluation Kit for PE43711

Latched Parallel Programming Procedure

For automated Latched Parallel programming, connect the USB dongle board and cable that is provided with the evaluation kit (EVK) from the USB port of the PC to the J5 header of the PE43711 EVB, and set the LE and D0–D6 SP3T switches to the EXT position. Position the Parallel/Serial (P/S) select switch to the Parallel position. The evaluation software is written to operate the DSA in Parallel mode. Ensure that the software GUI is set to Latched Parallel mode. Use the software GUI to enable the desired attenuation state. The software GUI automatically programs the DSA each time an attenuation state is enabled.

Serial Programming Procedure

For automated Serial programming, connect the USB dongle board and cable that is provided with the EVK from the USB port of the PC to the J5 header of the PE43711 EVB, and set the LE and D0–D6 SP3T switches to the EXT position. Position the Parallel/Serial (P/S) select switch to the Serial position. The software GUI is written to operate the DSA in Serial mode. Use the software GUI to enable each setting to the desired attenuation state. The software GUI automatically programs the DSA each time an attenuation state is enabled.


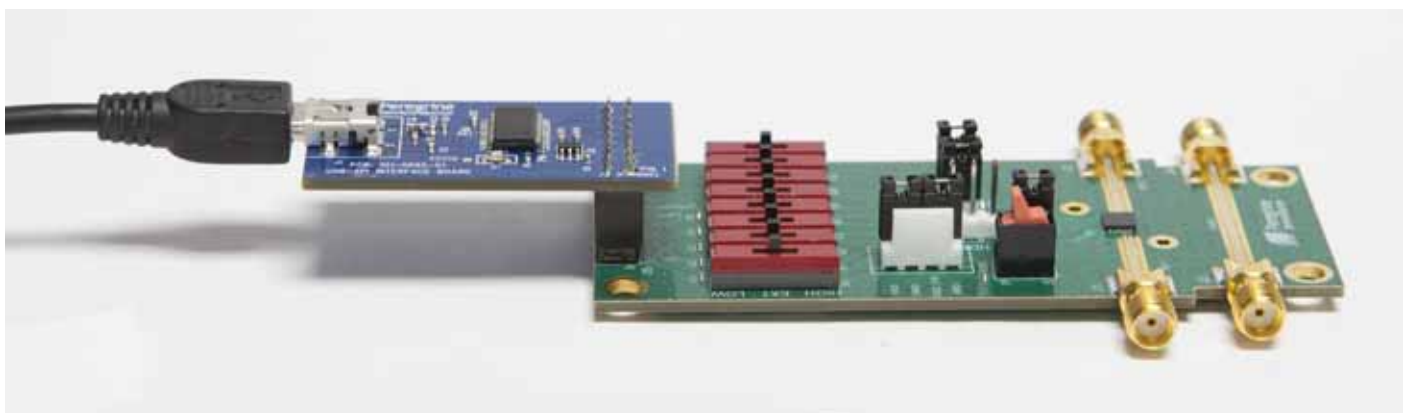


Figure 34 • Evaluation Kit Layout for PE43711

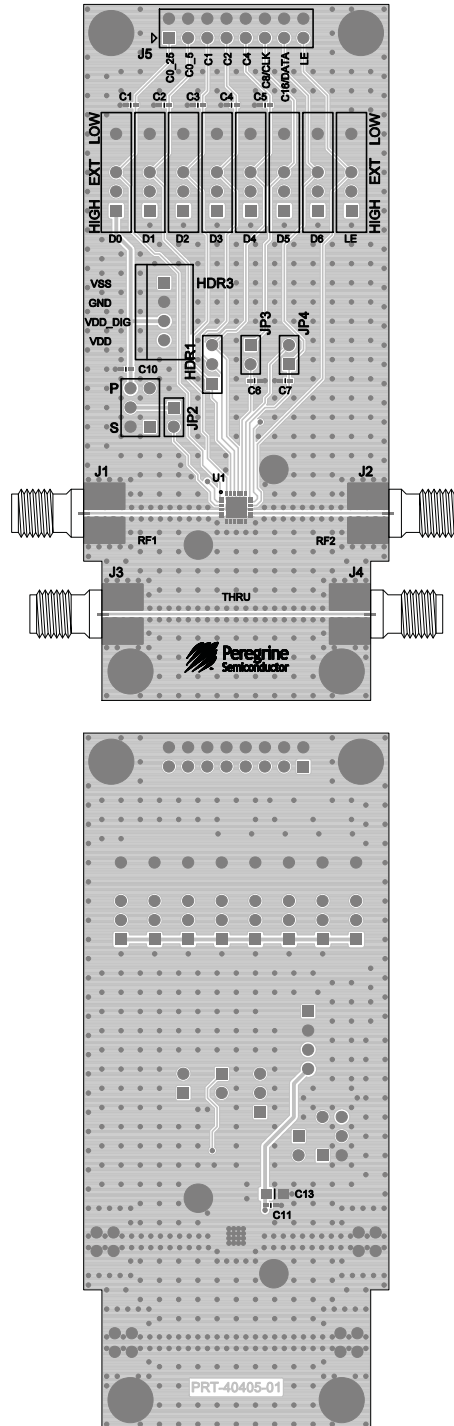

Pin Information

This section provides pinout information for the PE43711. **Figure 35** shows the pin map of this device for the available package. **Table 9** provides a description for each pin.

Figure 35 • Pin Configuration (Top View)

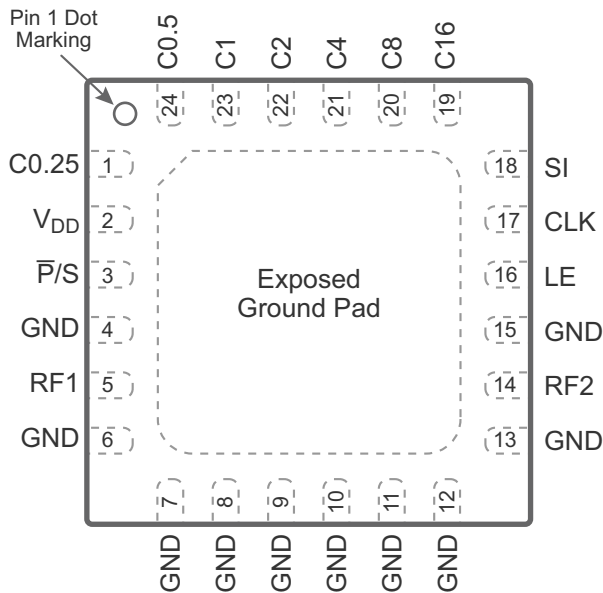


Table 9 • Pin Descriptions for PE43711

| Pin No. | Pin Name | Description |
|-------------|---------------------------|--|
| 1 | C0.25 (D0) ⁽¹⁾ | Attenuation control bit, 0.25 dB |
| 2 | V _{DD} | Supply voltage |
| 3 | \bar{P}/S | Serial/Parallel mode select |
| 4, 6–13, 15 | GND | Ground |
| 5 | RF1 ⁽²⁾ | RF1 port (RF input) |
| 14 | RF2 ⁽²⁾ | RF2 port (RF output) |
| 16 | LE | Serial interface Latch Enable input |
| 17 | CLK | Serial interface Clock input |
| 18 | SI | Serial interface Data input |
| 19 | C16 (D6) ⁽¹⁾ | Parallel control bit, 16 dB |
| 20 | C8 (D5) ⁽¹⁾ | Parallel control bit, 8 dB |
| 21 | C4 (D4) ⁽¹⁾ | Parallel control bit, 4 dB |
| 22 | C2 (D3) ⁽¹⁾ | Parallel control bit, 2 dB |
| 23 | C1 (D2) ⁽¹⁾ | Parallel control bit, 1 dB |
| 24 | C0.5 (D1) ⁽¹⁾ | Parallel control bit, 0.5 dB |
| Pad | GND | Exposed pad: ground for proper operation |

Notes:

- 1) Ground C0.25, C0.5, C1, C2, C4, C8, and C16 if not in use.
- 2) RF pins 5 and 14 must be at 0 VDC. The RF pins do not require DC blocking capacitors for proper operation if the 0 VDC requirement is met.

Packaging Information


This section provides packaging data including the moisture sensitivity level, package drawing, package marking and tape-and-reel information.

Moisture Sensitivity Level

The moisture sensitivity level rating for the PE43711 in the 24-lead 4 × 4 mm QFN package is MSL1.


Package Drawing

Figure 36 • Package Mechanical Drawing for 24-lead 4 × 4 × 0.85 mm QFN

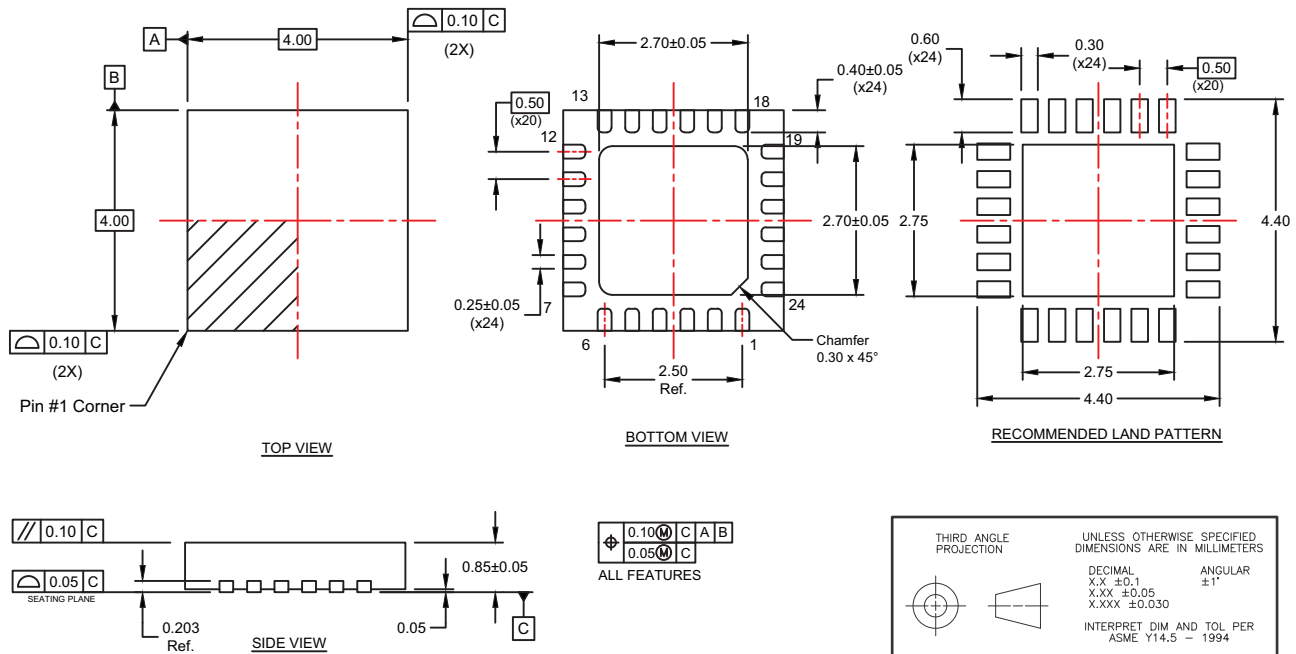

Top-Marking Specification


Figure 37 • Package Marking Specifications for PE43711



- = Pin 1 indicator
- YY = Last two digits of assembly year
- WW = Assembly work week
- ZZZZZZ = Assembly lot code (Maximum six characters)

Tape and Reel Specification

Figure 38 • Tape and Reel Specifications for 24-lead 4 × 4 × 0.85 mm QFN

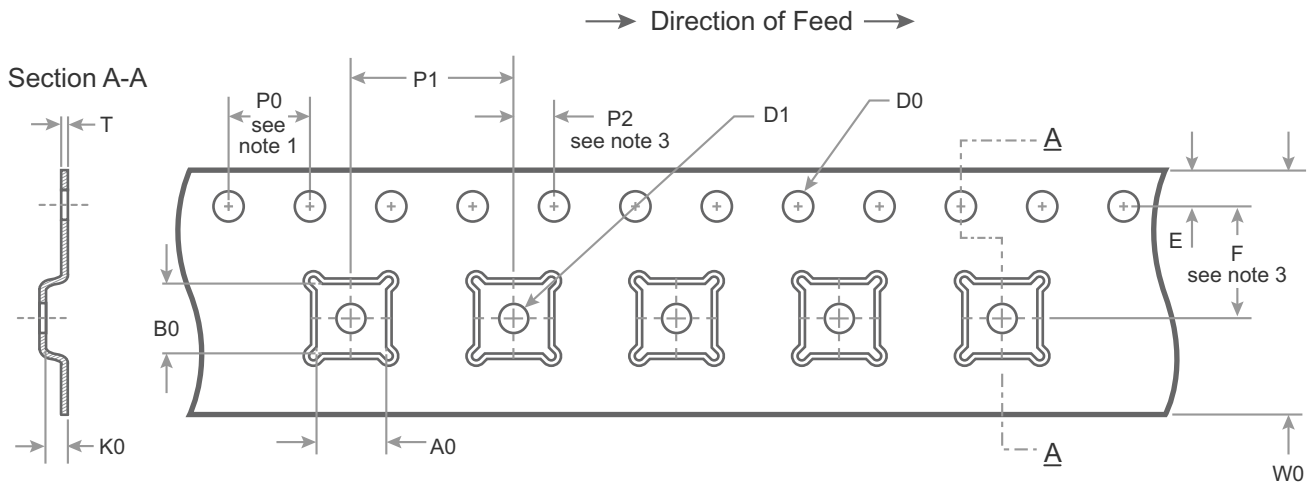


| | |
|----|--------------------|
| A0 | 4.35 |
| B0 | 4.35 |
| K0 | 1.10 |
| D0 | 1.50 + 0.10/ -0.00 |
| D1 | 1.50 min |
| E | 1.75 ± 0.10 |
| F | 5.50 ± 0.05 |
| P0 | 4.00 |
| P1 | 8.00 |
| P2 | 2.00 ± 0.05 |
| T | 0.30 ± 0.05 |
| W0 | 12.00 ± 0.30 |

Notes:

1. 10 Sprocket hole pitch cumulative tolerance ±0.2
2. Camber in compliance with EIA 481
3. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole

Dimensions are in millimeters unless otherwise specified



Device Orientation in Tape

Ordering Information

Table 10 lists the available ordering codes for the PE43711 as well as available shipping methods.

Table 10 • Order Codes for PE43711

| Order Codes | Description | Packaging | Shipping Method |
|-------------|---------------------------------|----------------------------|------------------|
| PE43711B-Z | PE43711 Digital step attenuator | Green 24-lead 4 x 4 mm QFN | 3000 units / T&R |
| EK43711-03 | PE43711 Evaluation kit | Evaluation kit | 1 / Box |
| PE43711A-Z | PE43711 Digital step attenuator | Green 24-lead 4 x 4 mm QFN | 3000 units / T&R |

Document Categories

Advance Information

The product is in a formative or design stage. The datasheet contains design target specifications for product development. Specifications and features may change in any manner without notice.

Preliminary Specification

The datasheet contains preliminary data. Additional data may be added at a later date. Peregrine reserves the right to change specifications at any time without notice in order to supply the best possible product.

Product Specification

The datasheet contains final data. In the event Peregrine decides to change the specifications, Peregrine will notify customers of the intended changes by issuing a CNF (Customer Notification Form).

Sales Contact

For additional information, contact Sales at sales@psemi.com.

Disclaimers

The information in this document is believed to be reliable. However, Peregrine assumes no liability for the use of this information. Use shall be entirely at the user's own risk. No patent rights or licenses to any circuits described in this document are implied or granted to any third party. Peregrine's products are not designed or intended for use in devices or systems intended for surgical implant, or in other applications intended to support or sustain life, or in any application in which the failure of the Peregrine product could create a situation in which personal injury or death might occur. Peregrine assumes no liability for damages, including consequential or incidental damages, arising out of the use of its products in such applications.

Patent Statement

Peregrine products are protected under one or more of the following U.S. patents: patents.psemi.com

Copyright and Trademark

©2017, 2018, Peregrine Semiconductor Corporation. All rights reserved. The Peregrine name, logo, UTSi and UltraCMOS are registered trademarks and HaRP, MultiSwitch and DuNE are trademarks of Peregrine Semiconductor Corp.

单击下面可查看定价，库存，交付和生命周期等信息

[>>pSemi \(游隼半导体\)](#)