


X5R Dielectric

General Specifications

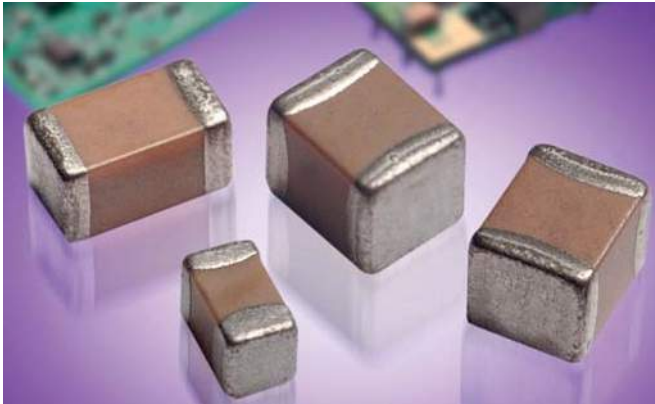

GENERAL DESCRIPTION

- General Purpose Dielectric for Ceramic Capacitors
- EIA Class II Dielectric
- Temperature variation of capacitance is within $\pm 15\%$ from -55°C to $+85^{\circ}\text{C}$
- Well suited for decoupling and filtering applications
- Available in High Capacitance values (up to $100\mu\text{F}$)

PART NUMBER (see page 2 for complete part number explanation)

1210

Size
(L" x W")
0101**
0201
0402
0603
0805
1206
1210
1812

4

Voltage
4 = 4V
6 = 6.3V
Z = 10V
Y = 16V
3 = 25V
D = 35V
5 = 50V
1 = 100V

D

Dielectric
D = X5R

107

Capacitance Code (In pF)
2 Sig. Digits
+ Number of Zeros

M

Capacitance Tolerance
K = $\pm 10\%$
M = $\pm 20\%$

A

Failure Rate
A = N/A

T

Terminations
T = Plated Ni
and Sn

2

Packaging
2 = 7" Reel
4 = 13" Reel
U = 4mm TR
(01005)

A



Special Code
A = Std.

**EIA 01005



NOTE: Contact factory for availability of Tolerance Options for Specific Part Numbers.
Contact factory for non-specified capacitance values.


TYPICAL ELECTRICAL CHARACTERISTICS

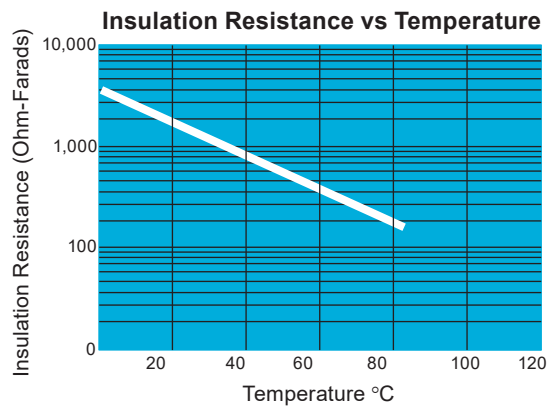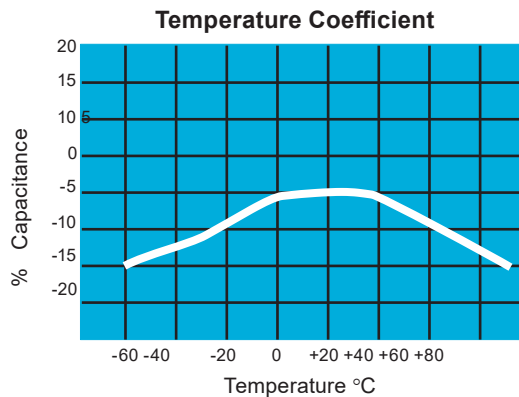

X5R Dielectric



Specifications and Test Methods

Parameter/Test		X5R Specification Limits	Measuring Conditions	
Operating Temperature Range		-55°C to +85°C	Temperature Cycle Chamber	
Capacitance		Within specified tolerance	Freq.: 1.0 kHz \pm 10% Voltage: 1.0Vrms \pm .2V For Cap > 10 μ F, 0.5Vrms @ 120Hz	
Dissipation Factor		\leq 2.5% for \geq 50V DC rating \leq 12.5% for 25V, 35V DC rating \leq 12.5% Max. for 16V DC rating and lower Contact Factory for DF by PN		
Insulation Resistance		10,000M Ω or 500M Ω - μ F, whichever is less		
Dielectric Strength		No breakdown or visual defects	Charge device with 250% of rated voltage for 1-5 seconds, w/charge and discharge current limited to 50 mA (max)	
Resistance to Flexure Stresses	Appearance	No defects	Deflection: 2mm Test Time: 30 seconds 	
	Capacitance Variation	$\leq \pm 12\%$		
	Dissipation Factor	Meets Initial Values (As Above)		
	Insulation Resistance	\geq Initial Value x 0.3		
Solderability		\geq 95% of each terminal should be covered with fresh solder	Dip device in eutectic solder at 230 \pm 5°C for 5.0 \pm 0.5 seconds	
Resistance to Solder Heat	Appearance	No defects, <25% leaching of either end terminal	Dip device in eutectic solder at 260°C for 60sec- onds. Store at room temperature for 24 \pm 2hours before measuring electrical properties.	
	Capacitance Variation	$\leq \pm 7.5\%$		
	Dissipation Factor	Meets Initial Values (As Above)		
	Insulation Resistance	Meets Initial Values (As Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Thermal Shock	Appearance	No visual defects	Step 1: -55°C \pm 2°	30 \pm 3 minutes
	Capacitance Variation	$\leq \pm 7.5\%$	Step 2: Room Temp	\leq 3 minutes
	Dissipation Factor	Meets Initial Values (As Above)	Step 3: +85°C \pm 2°	30 \pm 3 minutes
	Insulation Resistance	Meets Initial Values (As Above)	Step 4: Room Temp	\leq 3 minutes
	Dielectric Strength	Meets Initial Values (As Above)	Repeat for 5 cycles and measure after 24 \pm 2 hours at room temperature	
Load Life	Appearance	No visual defects	Charge device with 1.5X rated voltage in test chamber set at 85°C \pm 2°C for 1000 hours (+48, -0). Note: Contact factory for *optional specification part numbers that are tested at < 1.5X rated voltage. Remove from test chamber and stabilize at room temperature for 24 \pm 2 hours	
	Capacitance Variation	$\leq \pm 12.5\%$		
	Dissipation Factor	\leq Initial Value x 2.0 (See Above)		
	Insulation Resistance	\geq Initial Value x 0.3 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		
Load Humidity	Appearance	No visual defects	Store in a test chamber set at 85°C \pm 2°C/ 85% \pm 5% relative humidity for 1000 hours (+48, -0) with rated voltage applied. Remove from chamber and stabilize at room temperature and humidity for 24 \pm 2 hours before measuring.	
	Capacitance Variation	$\leq \pm 12.5\%$		
	Dissipation Factor	\leq Initial Value x 2.0 (See Above)		
	Insulation Resistance	\geq Initial Value x 0.3 (See Above)		
	Dielectric Strength	Meets Initial Values (As Above)		

X5R Dielectric Capacitance Range

PREFERRED SIZES ARE SHADED

Case Size	0101*			0201			0402				0603					0805																	
Soldering	Reflow Only			Reflow Only			Reflow/Wave				Reflow/Wave					Reflow/Wave																	
Packaging	Paper/Embossed			All Paper			All Paper				All Paper					Paper/Embossed																	
(L) Length	mm	0.40 ± 0.02		0.60 ± 0.09			1.00 ± 0.15				1.60 ± 0.15					2.01 ± 0.20																	
(W) Width	mm	0.20 ± 0.02		0.30 ± 0.09			0.50 ± 0.15				0.81 ± 0.15					1.25 ± 0.20																	
(t) Terminal	mm	0.10 ± 0.04		0.15 ± 0.05			0.25 ± 0.15				0.35 ± 0.15					0.50 ± 0.25																	
	(in.)	(0.004 ± 0.0016)		(0.006 ± 0.002)			(0.010 ± 0.006)				(0.014 ± 0.006)					(0.020 ± 0.010)																	
Voltage:		6.3	16	4	6.3	10	16	25	4	6.3	10	16	25	50	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50					
Cap(pF)	100	101	B					A																									
	150	151	B					A																									
	220	221	B					A						C																			
	330	331	B					A						C																			
	470	471	B					A						C																			
	680	681	B					A						C																			
	1000	102	B					A	A					C																			
	1500	152	B	B				A	A					C																			
	2200	222	B	B				A	A	A				C																			
	3300	332	B	B				A	A	A				C																			
	4700	472	B	B				A	A	A				C																			
	6800	682	B	B				A	A	A				C																			
Cap(μF)	0.01	103	B	B				A	A	A				C																			
	0.015	150	B					A	A	A				C																			
	0.022	223	B					A	A	A	A			C	C													N					
	0.033	333	B					A	A	A				C														N					
	0.047	473	B					A	A	A	A			C	C													N					
	0.068	689	B					A	A	A				C														N					
	0.1	104	B					A	A	A	A			C	C	C	C										N	N	N				
	0.15	154						A	A	A				C													N	N					
	0.22	224	B					A	A	A				C	C	C	C	C									N	N					
	0.33	334						A	A					C													N	N					
	0.47	474	B					A	A					C	C	C	C	C	E								N	P	P				
	0.68	684						A	A	C	C			C	C	C	C	C	E								N	P					
	1.0	105						A	A	C	C			C	C	C	C	C	E	G	G	G	G	J	G	G		N	N	P	P		
	1.5	155						A	A	C	C			C	C	C	C	C	E	G	G	G	G	J	G	G		N	N	P	P		
	2.2	225						C	C	C				C	C	C	C	C		G	G	J	J	J	K	K		N	N	N	P	P	
	3.3	335						C	C					C						J	J	J					N	N					
	4.7	475						C	C					E	E	E	E			J	J	J	G	G			N	P	J	N	N	P	P
	10	106						C	C					E	E	E				K	J	J	J				P	P	P	P	P	P	
	22	226						C	C					E	E					K	K	K					P	P	P	P	P		
	47	476						C	C					E	E					K	K						P	P	P				
	100	107						C	C					E	E					K	K						P	P					
Voltage:		6.3	16	4	6.3	10	16	25	4	6.3	10	16	25	50	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50					
Case Size	0101*			0201			0402				0603					0805																	

Letter	A	B	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max.	0.33	0.22	0.56	0.71	0.90	0.94	1.02	1.27	1.40	1.52	1.78	2.29	2.54	2.79
Thickness	(0.013)	(0.009)	(0.022)	(0.028)	(0.035)	(0.037)	(0.040)	(0.050)	(0.055)	(0.060)	(0.070)	(0.090)	(0.100)	(0.110)
	PAPER						EMBOSSSED							

PAPER and EMBOSSSED available for 01005

NOTE: Contact factory for non-specified capacitance values

*EIA 01005

X5R Dielectric Capacitance Range



PREFERRED SIZES ARE SHADED

Case Size	1206								1210								1812							
Soldering	Reflow/Wave								Reflow Only								Reflow Only							
Packaging	Paper/Embossed								Paper/Embossed								All Embossed							
(L) Length	3.20 ± 0.20 (0.126 ± 0.008)								3.20 ± 0.20 (0.126 ± 0.008)								4.50 ± 0.30 (0.177 ± 0.012)							
(W) Width	1.60 ± 0.20 (0.063 ± 0.008)								2.50 ± 0.20 (0.098 ± 0.008)								3.20 ± 0.20 (0.126 ± 0.008)							
(t) Terminal	0.50 ± 0.25 (0.020 ± 0.010)								0.50 ± 0.25 (0.020 ± 0.010)								0.61 ± 0.36 (0.024 ± 0.014)							
Voltage:	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50			
Cap(pF) 100 101																								
150 151																								
220 221																								
330 331																								
470 471																								
680 681																								
1000 102																								
1500 152																								
2200 222																								
3300 332																								
4700 472																								
6800 682																								
Cap(µF) 0.01 103																								
0.015 150																								
0.022 223																								
0.033 333																								
0.047 473																								
0.068 689																								
0.1 104																								
0.15 154																								
0.22 224																								
0.33 334																								
0.47 474					Q	Q								X	X									
0.68 684																								
1.0 105					Q	Q	Q							X	X	X								
1.5 155																								
2.2 225				Q	Q	Q	Q	Q						X	Z	Z								
3.3 335			Q	Q																				
4.7 475	X	X	X	X	X	X	X	X				Z	Z	Z	Z	Z								
10 106	X	X	X	X	X	X	X	X		X	X	Z	Z	Z	Z	Z					Z			
22 226	X	X	X	X	X	X				Z	Z	Z	Z	Z	Z			Z	Z	Z	Z			
47 476	X	X	X	X						Z	Z	Z	Z	Z										
100 107	X	X								Z	Z	Z	Z											
Voltage:	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50			
Case Size	1206								1210								1812							

Letter	A	B	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max. Thickness	0.33 (0.013)	0.22 (0.009)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)
	PAPER						EMBOSSSED							

PAPER and EMBOSSSED available for 01005

NOTE: Contact factory for non-specified capacitance values

*EIA 01005



单击下面可查看定价，库存，交付和生命周期等信息

[>>AVX](#)

[>>点击查看相关商品](#)