



ALPHA & OMEGA
SEMICONDUCTOR

AO3495

20V P-Channel MOSFET

General Description

- Low $R_{DS(ON)}$
- RoHS and Halogen-Free Compliant


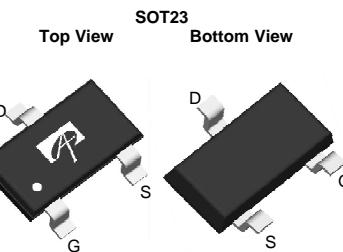
Applications

- Load switch
- PWM

Product Summary

| | |
|-------------------------------------|--------|
| V_{DS} | -20V |
| I_D (at $V_{GS}=-4.5V$) | -5A |
| $R_{DS(ON)}$ (at $V_{GS} = -4.5V$) | < 41mΩ |
| $R_{DS(ON)}$ (at $V_{GS} = -2.5V$) | < 53mΩ |
| $R_{DS(ON)}$ (at $V_{GS} = -1.8V$) | < 65mΩ |

ESD protected



Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

| Parameter | Symbol | Maximum | Units |
|--|----------------|------------|-------|
| Drain-Source Voltage | V_{DS} | -20 | V |
| Gate-Source Voltage | V_{GS} | ± 8 | V |
| Continuous Drain Current | I_D | -5 | A |
| Current $T_A=70^\circ\text{C}$ | | -4 | |
| Pulsed Drain Current ^C | I_{DM} | -30 | |
| Power Dissipation ^B | P_D | 1.5 | W |
| $T_A=70^\circ\text{C}$ | | 1 | |
| Junction and Storage Temperature Range | T_J, T_{STG} | -55 to 150 | °C |

Thermal Characteristics

| Parameter | Symbol | Typ | Max | Units |
|---|-----------------|-----|-----|-------|
| Maximum Junction-to-Ambient ^A | $R_{\theta JA}$ | 65 | 80 | °C/W |
| Maximum Junction-to-Ambient ^{A,D} Steady-State | | 85 | 100 | °C/W |
| Maximum Junction-to-Lead | $R_{\theta JL}$ | 43 | 52 | °C/W |

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|-----------------------------|---------------------------------------|--|------|----------|----------|------------------|
| STATIC PARAMETERS | | | | | | |
| BV_{DSS} | Drain-Source Breakdown Voltage | $I_D=-250\mu\text{A}, V_{GS}=0\text{V}$ | -20 | | | V |
| I_{DSS} | Zero Gate Voltage Drain Current | $V_{DS}=-20\text{V}, V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$ | | | -1 -5 | μA |
| I_{GSS} | Gate-Body leakage current | $V_{DS}=0\text{V}, V_{GS}= \pm 8\text{V}$ | | | ± 10 | μA |
| $V_{\text{GS(th)}}$ | Gate Threshold Voltage | $V_{DS}=V_{GS}, I_D=-250\mu\text{A}$ | -0.3 | -0.57 | -0.9 | V |
| $I_{\text{D(ON)}}$ | On state drain current | $V_{GS}=-4.5\text{V}, V_{DS}=-5\text{V}$ | -30 | | | A |
| $R_{\text{DS(ON)}}$ | Static Drain-Source On-Resistance | $V_{GS}=-4.5\text{V}, I_D=-4\text{A}$ $T_J=125^\circ\text{C}$ | | 34 49 | 41 59 | $\text{m}\Omega$ |
| | | $V_{GS}=-2.5\text{V}, I_D=-4\text{A}$ | | 42 | 53 | $\text{m}\Omega$ |
| | | $V_{GS}=-1.8\text{V}, I_D=-2\text{A}$ | | 52 | 65 | $\text{m}\Omega$ |
| | | $V_{GS}=-1.5\text{V}, I_D=-1\text{A}$ | | 61 | | $\text{m}\Omega$ |
| g_{FS} | Forward Transconductance | $V_{DS}=-5\text{V}, I_D=-4\text{A}$ | | 20 | | S |
| V_{SD} | Diode Forward Voltage | $I_S=-1\text{A}, V_{GS}=0\text{V}$ | | -0.64 | -1 | V |
| I_{S} | Maximum Body-Diode Continuous Current | | | | -2 | A |
| DYNAMIC PARAMETERS | | | | | | |
| C_{iss} | Input Capacitance | $V_{GS}=0\text{V}, V_{DS}=-10\text{V}, f=1\text{MHz}$ | | 751 | | pF |
| C_{oss} | Output Capacitance | | | 115 | | pF |
| C_{rss} | Reverse Transfer Capacitance | | | 80 | | pF |
| R_g | Gate resistance | $V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$ | 6 | 13 | 20 | Ω |
| SWITCHING PARAMETERS | | | | | | |
| Q_g | Total Gate Charge | $V_{GS}=-4.5\text{V}, V_{DS}=-10\text{V}, I_D=-4\text{A}$ | | 9.3 | 20 | nC |
| Q_{gs} | Gate Source Charge | | | 1 | | nC |
| Q_{gd} | Gate Drain Charge | | | 2.2 | | nC |
| $t_{\text{D(on)}}$ | Turn-On Delay Time | $V_{GS}=-4.5\text{V}, V_{DS}=-10\text{V}, R_L=2.5\Omega, R_{\text{GEN}}=3\Omega$ | | 13 | | ns |
| t_r | Turn-On Rise Time | | | 9 | | ns |
| $t_{\text{D(off)}}$ | Turn-Off Delay Time | | | 19 | | ns |
| t_f | Turn-Off Fall Time | | | 29 | | ns |
| t_{rr} | Body Diode Reverse Recovery Time | $I_F=-4\text{A}, dI/dt=500\text{A}/\mu\text{s}$ | | 26 | | ns |
| Q_{rr} | Body Diode Reverse Recovery Charge | $I_F=-4\text{A}, dI/dt=500\text{A}/\mu\text{s}$ | | 51 | | nC |

A. The value of R_{QJA} is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The value in any given application depends on the user's specific board design.

B. The power dissipation P_D is based on $T_{J(\text{MAX})}=150^\circ\text{C}$, using $\leqslant 10\text{s}$ junction-to-ambient thermal resistance.

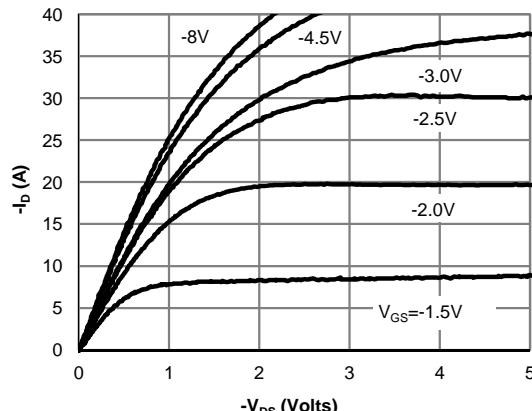
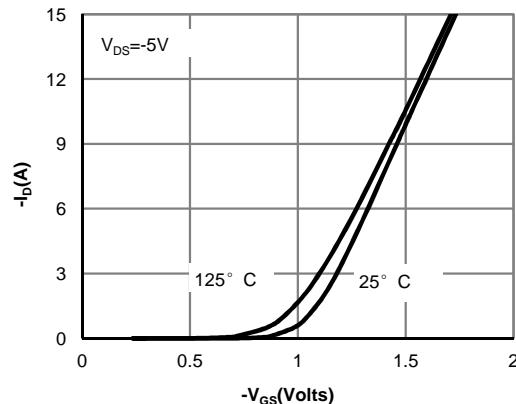
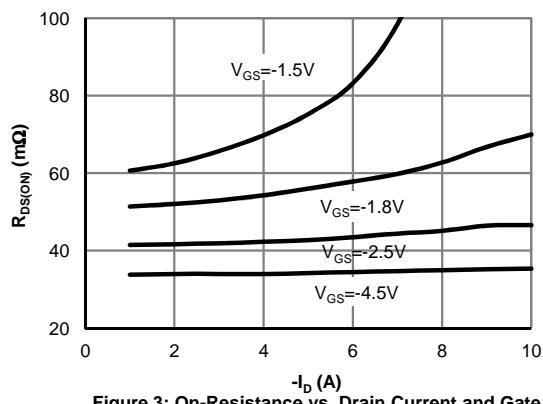
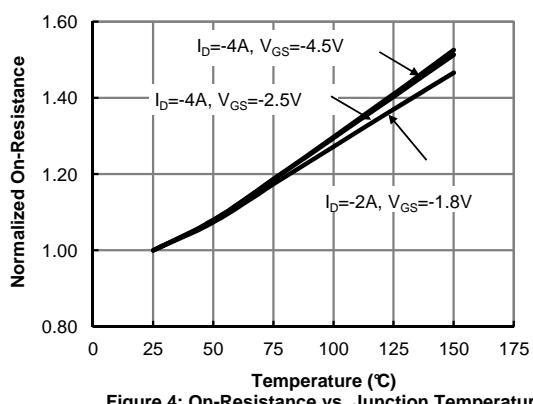
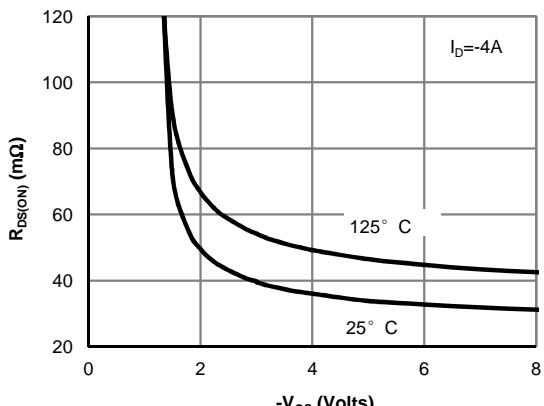
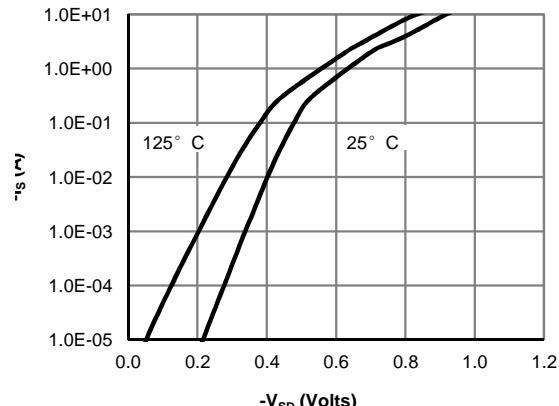
C. Repetitive rating, pulse width limited by junction temperature $T_{J(\text{MAX})}=150^\circ\text{C}$. Ratings are based on low frequency and duty cycles to keep initial $T_J=25^\circ\text{C}$.

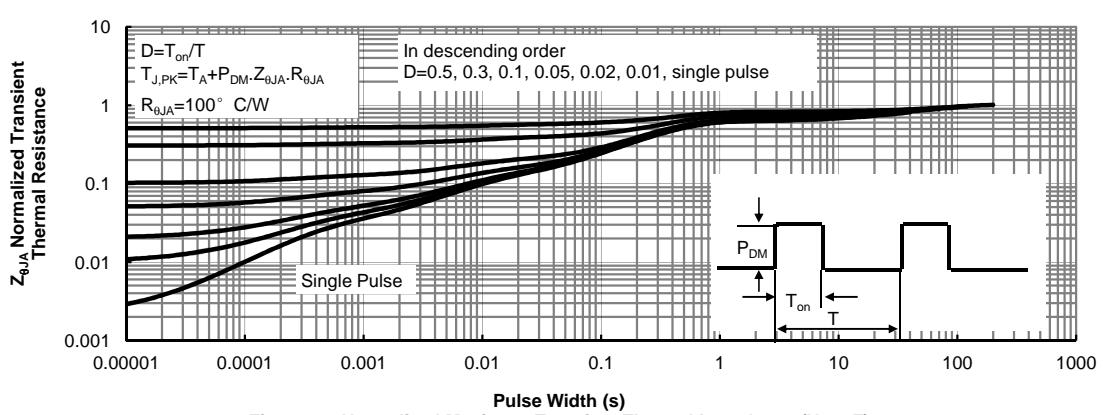
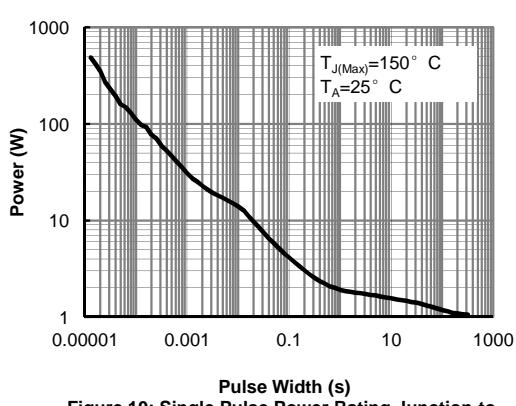
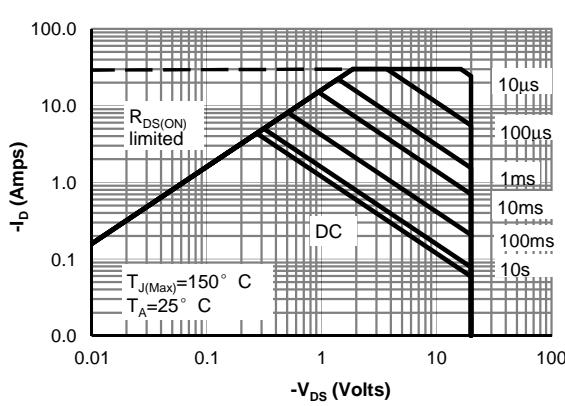
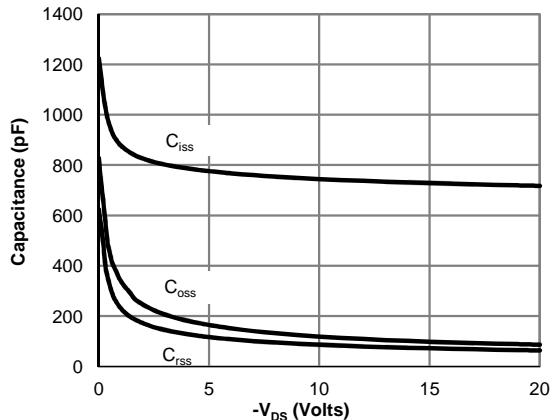
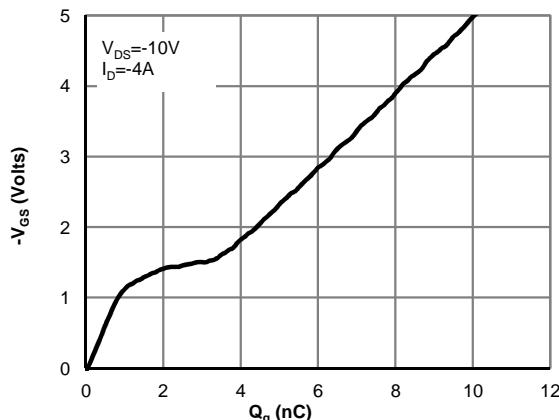
D. The R_{QJA} is the sum of the thermal impedance from junction to lead R_{QJL} and lead to ambient.

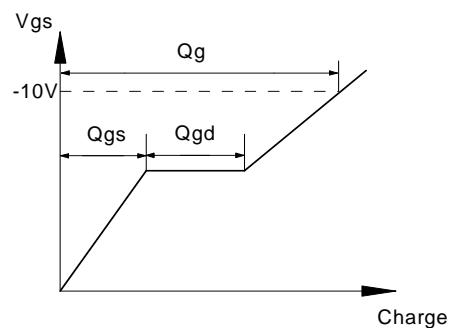
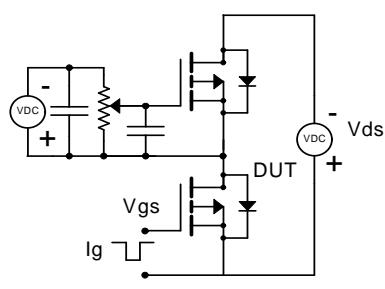
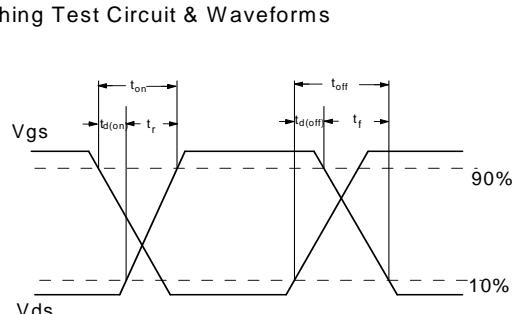
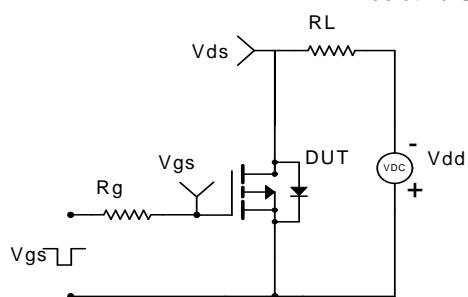
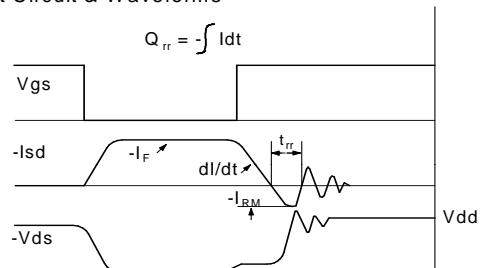
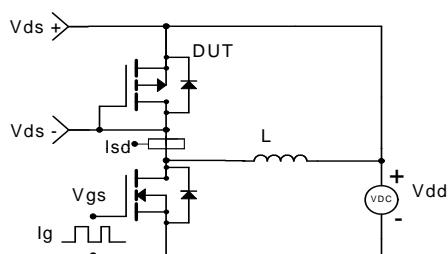
E. The static characteristics in Figures 1 to 6 are obtained using $<300\mu\text{s}$ pulses, duty cycle 0.5% max.

F. These curves are based on the junction-to-ambient thermal impedance which is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, assuming a maximum junction temperature of $T_{J(\text{MAX})}=150^\circ\text{C}$. The SOA curve provides a single pulse rating.

APPLICATIONS OR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Fig 1: On-Region Characteristics (Note E)

Figure 2: Transfer Characteristics (Note E)

Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

Figure 4: On-Resistance vs. Junction Temperature (Note E)

Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

Figure 6: Body-Diode Characteristics (Note E)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


Gate Charge Test Circuit & Waveform

Resistive Switching Test Circuit & Waveforms

Diode Recovery Test Circuit & Waveforms




电子元器件线上授权代理开拓者
原厂授权 · 正品现货 · 一件即发

单击下面可查看定价，库存，交付和生命周期等信息

[>>AOS\(万国半导体\)](#)