

# Bridgelux RS Array Series

## Product Data Sheet DS25

**BXRA-27x4000, BXRA-27x7000, BXRA-30x4000, BXRA-30x7000, BXRA-35x4000, BXRA-35x7000, BXRA-40E4500, BXRA-40E7500, BXRA-5xC5300, BXRA-5xC9000**

### Introduction

The Bridgelux family of LED Array products delivers high performance, compact and cost-effective solid-state lighting solutions to serve the general lighting market. These products combine the higher efficacy, lifetime, and reliability benefits of LEDs with the light output levels of many conventional lighting sources. The Bridgelux RS Array Series has been specified to enable lamp and luminaire designs with comparable performance to existing high wattage CFL and HID conventional light sources for retail, commercial, industrial and outdoor/street lighting applications. Bridgelux Arrays are extremely well equipped for all types of light-on-demand applications, where they can be instantaneously and smoothly dimmed up or down without any effect on lifetime, unlike traditional CFL and HID light sources.

The Bridgelux RS Array series provides a high performance alternative to conventional solid state solutions, delivering between 3400 and 9000 lumens under application conditions in warm, neutral and cool white color temperatures. These compact high flux density light sources deliver uniform high quality illumination without pixilation or the multiple shadow effect caused by LED component based solutions, enabling excellent beam control for precision lighting. To simplify system design for appropriate light output, Bridgelux LED Arrays are specified to deliver performance under typical use conditions.

These integrated plug and play solutions reduce system complexity and enable miniaturized cost-effective lamp and luminaire designs. Luminaire designs incorporating these LED Arrays deliver system level performance comparable to that of 42-55 Watt CFL, 35-90 Watt low pressure sodium, 70-150 Watt high pressure sodium or 70-200 Watt metal halide based luminaires and feature increased system level and service life. Typical applications include retail lighting, commercial down lights, high bay, outdoor and street lights, and entertainment lighting.

### Features

- Compact high flux density light source
- Uniform high quality illumination
- Minimum 70, 80 and 90 CRI options
- Streamlined thermal path
- Energy Star / ANSI compliant color binning structure with 3SDCM options
- More energy efficient than incandescent, halogen and fluorescent lamps
- Low voltage DC operation
- Instant light with unlimited dimming
- 5-Year warranty
- RoHS compliant and Pb free

### Benefits

- Enhanced optical control
- Clean white light without pixilation
- High quality true color reproduction
- Significantly reduced thermal resistance and increased operating temperatures
- Uniform consistent white light
- Lower operating costs
- Increased safety
- Easy to use with daylight and motion detectors to enable increased energy savings
- Reduced maintenance costs
- Environmentally friendly, no disposal issue



---

| Table of Contents  | Page |
|--|------|
| Product Nomenclature   | 3    |
| Average Lumen Maintenance Characteristics                                | 3    |
| Environmental Compliance   | 3    |
| UL Recognition   | 4    |
| Minor Product Change Policy  | 4    |
| Cautionary Statements  | 4    |
| Case Temperature Measurement Point                                       | 5    |
| Quick Selection Guide  | 6    |
| Flux Characteristics   | 7    |
| Optical Characteristics  | 8    |
| Electrical Characteristics   | 9    |
| Absolute Minimum and Maximum Ratings                                     | 10   |
| Typical Performance at Alternative Drive Currents                        | 11   |
| Mechanical Dimensions  | 13   |
| Typical Radiation Pattern  | 14   |
| Wavelength Characteristics at Rated Test Current, $T_j=25^\circ\text{C}$ | 15   |
| Typical Relative Luminous Flux vs. Current, $T_j=25^\circ\text{C}$       | 16   |
| Typical Light Output Characteristics vs. Temperature                     | 17   |
| Typical Chromaticity Characteristics vs. Temperature                     | 18   |
| Forward Current Characteristics  | 19   |
| Color Binning Information  | 20   |
| Design Resources   | 23   |

---

## Product Nomenclature

The part number designation for Bridgelux LED Arrays is explained as follows:

BXRA – AB C DEFG – H – IJ - KLM

Where:

BXRA – Designates product family

AB – Designates the nominal ANSI color temperature; 27 = 2700K; 30 = 3000K, etc.

C - Designates minimum CRI; C = 70, E = 80, G = 90

DEFG - Designates Nominal Flux; 4000 = 4000lm, 7000 = 7000lm, 9000 = 9000lm, etc.

H – Designates configuration

IJ – Designates CCT Bin options

3000K as an example:

00 = Full ANSI: Q3, Q4, R3, R4

03 = 3 SDCM

KLM – Designates wire option

## Average Lumen Maintenance Characteristics

Bridgelux projects that its family of LED Array products will deliver, on average, greater than 70% lumen maintenance after 50,000 hours of operation at the rated forward test current. This performance assumes constant current operation with case temperature maintained at or below 85°C. For use beyond these typical operating conditions please consult your Bridgelux sales representative for further assistance.

These projections are based on a combination of package test data, semiconductor chip reliability data, a fundamental understanding of package related degradation mechanisms, and performance observed from products installed in the field using Bridgelux die technology. Bridgelux conducts lumen maintenance tests per LM80. Observation of design limits is required in order to achieve this projected lumen maintenance.

## Environmental Compliance

Bridgelux is committed to providing environmentally friendly products to the solid-state lighting market. Bridgelux LED Arrays are compliant to the European Union directives on the restriction of hazardous substances in electronic equipment, namely the RoHS directive. Bridgelux does not intentionally add the following restricted materials to LED Array products: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

---

## UL Recognition

Bridgelux secures UL Recognition for all the LED Array products. We continue to add arrays as they are recognized by UL. Please refer to the UL file E333389 for the latest list of UL Recognized Arrays. Bridgelux uses UL Recognized materials with suitable flammability ratings in the LED Array to streamline the process for customers to secure UL listing of the final luminaire product. Bridgelux recommends that luminaires are designed with a Class 2 Driver to facilitate the UL listing process.

## Minor Product Change Policy

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

## Cautionary Statements

### CAUTION: CONTACT WITH OPTICAL AREA

Do not touch the optical area of the LED Array. Avoid any contact with the optical area. Applying stress to the yellow phosphor resin area can result in damage to the LED Array.

Optics and reflectors must not be mounted in contact with the white phosphor resin area or the white ring that surrounds the yellow phosphor area. Using the white ring to secure optics can result in damage to the LED Array as the ring is not designed to act as a mechanical locating feature. Optical devices may be mounted on the top surface of the LED Array substrate outside of the white ring maximum OD as specified in the product data sheet. Use the mechanical features of the LED Array substrate edges and/or mounting holes to locate and secure the optical device as needed.

### CAUTION: EYE SAFETY

Eye safety classification for the use of Bridgelux LED Arrays is in accordance with IEC specification EN62471; Photobiological Safety of Lamps and Lamp Systems. Bridgelux LED Arrays are classified as Risk Group 1 (Low Risk) when operated at or below their rated test current. Please use appropriate precautions. It is important that employees working with LEDs are trained to use them safely.

### CAUTION: RISK OF BURN

Do not touch the LED Array or resin area during operation. Allow the LED Array to cool for a sufficient period of time before handling. The LED Array may reach elevated temperatures such that it can burn skin when touched.

### CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED Array. Please consult Application Note AN11 for additional information.

---

## Case Temperature Measurement Point

A case temperature measurement point location is included on the top surface of the Bridgelux LED Arrays. The location of this measurement point is indicated in the mechanical dimensions section of this data sheet.

The purpose of this measurement point is to allow the user access to a measurement point closely linked to the true case temperature on the back surface of the LED Array. Once the LED Array is installed, it is challenging to measure the back surface of the array, or true case temperature. Measuring the top surface of the product can lead to inaccurate results due to the poor thermal conductivity of the top layers of the array such as the solder mask and other materials.

Bridgelux has provided the case temperature measurement location in a manner which closely ties it to the true case temperature of the LED Array under steady state operation. Deviations between thermal measurements taken at the point indicated and the back of the LED Array differ by less than 1 °C, providing a robust method to testing thermal operation once the product is installed.

## Quick Selection Guide

The following configurations are available:

Table 1: Selection Guide for RS Arrays

| Base Part Number  | CCT<br>(Nominal) | CRI<br>(min) | Typical Pulsed Flux<br>$T_j$ 25°C<br>(lm) | Typical DC Flux<br>$T_{case}$ 70°C<br>(lm) | Test Current<br>(mA) | Vf<br>(Typ)<br>(V) | Power<br>(Typ)<br>(W) | Efficacy<br>(Typ at $T_j$<br>25°C)<br>(lm/W) |
|-------------------|------------------|--------------|---|--|----------------------|--------------------|-----------------------|--|
| BXRA-27E4000-H-00 | 2700             | 80           | 4450                                      | 3980                                       | 2100                 | 24.4               | 51                    | 87   |
| BXRA-27G4000-H-00 | 2700             | 90           | 3800                                      | 3400                                       | 2100                 | 24.4               | 51                    | 74   |
| BXRA-27E7000-J-00 | 2700             | 80           | 7050                                      | 6190                                       | 2800                 | 30.4               | 85                    | 83   |
| BXRA-27G7000-J-00 | 2700             | 90           | 6000                                      | 5270                                       | 2800                 | 30.4               | 85                    | 71   |
| BXRA-30E4000-H-00 | 3000             | 80           | 4725                                      | 4230                                       | 2100                 | 24.4               | 51                    | 92   |
| BXRA-30G4000-H-00 | 3000             | 90           | 4150                                      | 3715                                       | 2100                 | 24.4               | 51                    | 81   |
| BXRA-30E7000-J-00 | 3000             | 80           | 7500                                      | 6580                                       | 2800                 | 30.4               | 85                    | 88   |
| BXRA-30G7000-J-00 | 3000             | 90           | 6600                                      | 5790                                       | 2800                 | 30.4               | 85                    | 78   |
| BXRA-35E4000-H-00 | 3500             | 80           | 5100                                      | 4560                                       | 2100                 | 24.4               | 51                    | 100  |
| BXRA-35E7000-J-00 | 3500             | 80           | 8100                                      | 7110                                       | 2800                 | 30.4               | 85                    | 95   |
| BXRA-40E4500-H-00 | 4000             | 80           | 5400                                      | 4830                                       | 2100                 | 24.4               | 51                    | 106  |
| BXRA-40E7500-J-00 | 4000             | 80           | 8550                                      | 7500                                       | 2800                 | 30.4               | 85                    | 100  |
| BXRA-50C5300-H-00 | 5000             | 70           | 6000                                      | 5370                                       | 2100                 | 24.4               | 51                    | 117  |
| BXRA-50C9000-J-00 | 5000             | 70           | 9750                                      | 8560                                       | 2800                 | 30.4               | 85                    | 115  |
| BXRA-56C5300-H-00 | 5600             | 70           | 6000                                      | 5370                                       | 2100                 | 24.4               | 51                    | 117  |
| BXRA-56C9000-J-00 | 5600             | 70           | 9750                                      | 8560                                       | 2800                 | 30.4               | 85                    | 115  |

## Flux Characteristics

Table 2: Flux Characteristics

| Color         | ANSI CCT (K)      | Base Part Number  | CRI (min) <sup>(4)</sup> | Typical DC Flux<br>$T_{\text{case}} = 70^{\circ}\text{C}$<br>(lm) <sup>(3)</sup> | Minimum Pulsed Flux<br>$T_j = 25^{\circ}\text{C}$<br>(lm) <sup>(1)</sup> | Typical Pulsed Flux<br>$T_j = 25^{\circ}\text{C}$<br>(lm) | Test Current (mA) <sup>(2)</sup> |
|---------------|-------------------|-------------------|--------------------------|--|--|---|----------------------------------|
| Warm White    | 2700              | BXRA-27E4000-H-00 | 80                       | 3980   | 4000   | 4450  | 2100                             |
|               |                   | BXRA-27G4000-H-00 | 90                       | 3400   | 3400   | 3800  | 2100                             |
|               |                   | BXRA-27E7000-J-00 | 80                       | 6190   | 6350   | 7050  | 2800                             |
|               |                   | BXRA-27G7000-J-00 | 90                       | 5270   | 5400   | 6000  | 2800                             |
|               | 3000              | BXRA-30E4000-H-00 | 80                       | 4230   | 4250   | 4725  | 2100                             |
|               |                   | BXRA-30G4000-H-00 | 90                       | 3715   | 3750   | 4150  | 2100                             |
|               |                   | BXRA-30E7000-J-00 | 80                       | 6580   | 6750   | 7500  | 2800                             |
|               |                   | BXRA-30G7000-J-00 | 90                       | 5790   | 5950   | 6600  | 2800                             |
| 3500          | BXRA-35E4000-H-00 | 80                | 4560                     | 4600   | 5100   | 2100  |                                  |
|               | BXRA-35E7000-J-00 | 80                | 7110                     | 7300   | 8100   | 2800  |                                  |
| Neutral White | 4000              | BXRA-40E4500-H-00 | 80                       | 4830   | 4850   | 5400  | 2100                             |
|               |                   | BXRA-40E7500-J-00 | 80                       | 7500   | 7700   | 8550  | 2800                             |
| Cool White    | 5000              | BXRA-50C5300-H-00 | 70                       | 5370   | 5400   | 6000  | 2100                             |
|               |                   | BXRA-50C9000-J-00 | 70                       | 8560   | 8800   | 9750  | 2800                             |
|               | 5600              | BXRA-56C5300-H-00 | 70                       | 5370   | 5400   | 6000  | 2100                             |
|               |                   | BXRA-56C9000-J-00 | 70                       | 8560   | 8800   | 9750  | 2800                             |

Notes for Table 2:

1. Bridgelux maintains a  $\pm 7\%$  tolerance of flux measurements.
2. Parts are tested in pulsed conditions,  $T_j = 25^{\circ}\text{C}$ . Pulse width is 10 ms at rated test current.
3. Typical performance when driven at DC (direct current) test current with LED Array case temperature maintained at  $70^{\circ}\text{C}$ , mounted to heat sink with thermal interface material. Please contact a Bridgelux sales representative for additional details.
4. Typical R9 value for 90 CRI product options is 50.
5. Reference Table 7 and 8 for typical performance at other driver currents (including those commonly available in the market).

## Optical Characteristics

Table 3: Optical Characteristics

| Color         | ANSI CCT (K)      | Base Part Number  | Color Temperature (CCT) <sup>[1], [2], [3]</sup> |        |        | CRI (min) | Typical Viewing Angle (Degrees) $2\theta^{1/2}$ <sup>[4]</sup> | Typical Center Beam Candle Power <sup>[5]</sup> (cd) |
|---------------|-------------------|-------------------|--|--------|--------|-----------|--|--|
|               |                   |                   | Min  | Typ    | Max    |           |  |  |
| Warm White    | 2700              | BXRA-27E4000-H-00 | 2580 K   | 2725 K | 2870 K | 80        | 120  | 1420   |
|               |                   | BXRA-27G4000-H-00 | 2580 K   | 2725 K | 2870 K | 90        | 120  | 1210   |
|               |                   | BXRA-27E7000-J-00 | 2580 K   | 2725 K | 2870 K | 80        | 120  | 2240   |
|               |                   | BXRA-27G7000-J-00 | 2580 K   | 2725 K | 2870 K | 90        | 120  | 1910   |
|               | 3000              | BXRA-30E4000-H-00 | 2870 K   | 3045 K | 3220 K | 80        | 120  | 1500   |
|               |                   | BXRA-30G4000-H-00 | 2870 K   | 3045 K | 3220 K | 90        | 120  | 1320   |
|               |                   | BXRA-30E7000-J-00 | 2870 K   | 3045 K | 3220 K | 80        | 120  | 2380   |
|               |                   | BXRA-30G7000-J-00 | 2870 K   | 3045 K | 3220 K | 90        | 120  | 2100   |
| 3500          | BXRA-35E4000-H-00 | 3220 K            | 3465 K   | 3710 K | 80     | 120       | 1620   |  |
|               | BXRA-35E7000-J-00 | 3220 K            | 3465 K   | 3710 K | 80     | 120       | 2575   |  |
| Neutral White | 4000              | BXRA-40E4500-H-00 | 3700 K   | 4000 K | 4250 K | 80        | 120  | 1710   |
|               |                   | BXRA-40E7500-J-00 | 3700 K   | 4000 K | 4250 K | 80        | 120  | 1720   |
| Cool White    | 5000              | BXRA-50C5300-H-00 | 4745 K   | 5100 K | 5310 K | 70        | 120  | 1910   |
|               |                   | BXRA-50C9000-J-00 | 4745 K   | 5100 K | 5310 K | 70        | 120  | 3100   |
|               | 5600              | BXRA-56C5300-H-00 | 5310 K   | 5665 K | 6020 K | 70        | 120  | 1910   |
|               |                   | BXRA-56C9000-J-00 | 5310 K   | 5665 K | 6020 K | 70        | 120  | 3100   |

Notes for Table 3:

1. Parts are tested in pulsed conditions,  $T_j = 25^\circ\text{C}$ . Pulse width is 10 ms at rated test current.
2. Refer to Flux Characteristic Table for test current data.
3. Product is binned for color in x y coordinates.
4. Viewing angle is the off axis angle from the centerline where  $I_v$  is  $\frac{1}{2}$  of the peak value.
5. Center beam candle power is a calculated value based on lambertian radiation pattern at nominal test current.



## Electrical Characteristics

Table 4: Electrical Characteristics

| Color         | Base Part Number  | Forward Voltage Vf (V) <sup>[2]</sup> |      |      | Test Current (mA) <sup>[1]</sup> | Typical Coefficient of Forward Voltage (mV/°C) $\Delta Vf/\Delta T_j$ | Typical Thermal Resistance Junction to Case (°C/W) $R\theta_{j-c}$ |
|---------------|-------------------|---------------------------------------|------|------|----------------------------------|---|--|
|               |                   | Min                                   | Typ  | Max  |                                  |   |  |
| Warm White    | BXRA-27E4000-H-00 | 21.9                                  | 24.4 | 26.8 | 2100                             | -8 to -24   | 0.31   |
|               | BXRA-27G4000-H-00 | 21.9                                  | 24.4 | 26.8 | 2100                             | -8 to -24   | 0.31   |
|               | BXRA-27E7000-J-00 | 27.4                                  | 30.4 | 33.4 | 2800                             | -10 to -30  | 0.26   |
|               | BXRA-27G7000-J-00 | 27.4                                  | 30.4 | 33.4 | 2800                             | -10 to -30  | 0.26   |
|               | BXRA-30E4000-H-00 | 21.9                                  | 24.4 | 26.8 | 2100                             | -8 to -24   | 0.31   |
|               | BXRA-30G4000-H-00 | 21.9                                  | 24.4 | 26.8 | 2100                             | -8 to -24   | 0.31   |
|               | BXRA-30E7000-J-00 | 27.4                                  | 30.4 | 33.4 | 2800                             | -10 to -30  | 0.26   |
|               | BXRA-30G7000-J-00 | 27.4                                  | 30.4 | 33.4 | 2800                             | -10 to -30  | 0.26   |
|               | BXRA-35E4000-H-00 | 21.9                                  | 24.4 | 26.8 | 2100                             | -8 to -24   | 0.31   |
|               | BXRA-35E7000-J-00 | 27.4                                  | 30.4 | 33.4 | 2800                             | -10 to -30  | 0.26   |
| Neutral White | BXRA-40E4500-H-00 | 21.9                                  | 24.4 | 26.8 | 2100                             | -8 to -24   | 0.31   |
|               | BXRA-40E7500-J-00 | 27.4                                  | 30.4 | 33.4 | 2800                             | -10 to -30  | 0.26   |
| Cool White    | BXRA-50C5300-H-00 | 21.9                                  | 24.4 | 26.8 | 2100                             | -8 to -24   | 0.31   |
|               | BXRA-50C9000-J-00 | 27.4                                  | 30.4 | 33.4 | 2800                             | -10 to -30  | 0.26   |
|               | BXRA-56C5300-H-00 | 21.9                                  | 24.4 | 26.8 | 2100                             | -8 to -24   | 0.31   |
|               | BXRA-56C9000-J-00 | 27.4                                  | 30.4 | 33.4 | 2800                             | -10 to -30  | 0.26   |

Notes for Table 4:

1. Parts are tested in pulsed conditions,  $T_j = 25^\circ\text{C}$ . Pulse width is 10 ms at rated test current.
2. Bridgelux maintains a tester tolerance of  $\pm 0.10$  V on forward voltage measurements.

## Absolute Minimum and Maximum Ratings

Table 5: Maximum Current and Reverse Voltage Ratings

| Color             | Base Part Number  | Maximum DC Forward Current (mA) | Maximum Peak Pulsed Current (mA) <sup>[1]</sup> | Maximum Reverse Voltage (Vr) <sup>[2]</sup> |
|-------------------|-------------------|---------------------------------|---|---|
| Warm White        | BXRA-27E4000-H-00 | 3000                            | 4000  | -40 V                                       |
|                   | BXRA-27G4000-H-00 | 3000                            | 4000  | -40 V                                       |
|                   | BXRA-27E7000-J-00 | 3750                            | 5000  | -50 V                                       |
|                   | BXRA-27G7000-J-00 | 3750                            | 5000  | -50 V                                       |
|                   | BXRA-30E4000-H-00 | 3000                            | 4000  | -40 V                                       |
|                   | BXRA-30G4000-H-00 | 3000                            | 4000  | -40 V                                       |
|                   | BXRA-30E7000-J-00 | 3750                            | 5000  | -50 V                                       |
|                   | BXRA-30G7000-J-00 | 3750                            | 5000  | -50 V                                       |
|                   | BXRA-35E4000-H-00 | 3000                            | 4000  | -40 V                                       |
| BXRA-35E7000-J-00 | 3750              | 5000                            | -50 V   |   |
| Neutral White     | BXRA-40E4500-H-00 | 3000                            | 4000  | -40 V                                       |
|                   | BXRA-40E7500-J-00 | 3750                            | 5000  | -50 V                                       |
| Cool White        | BXRA-50C5300-H-00 | 3000                            | 4000  | -40 V                                       |
|                   | BXRA-50C9000-J-00 | 3750                            | 5000  | -50 V                                       |
|                   | BXRA-56C5300-H-00 | 3000                            | 4000  | -40 V                                       |
|                   | BXRA-56C9000-J-00 | 3750                            | 5000  | -50 V                                       |

Notes for Table 5:

1. Bridgelux recommends a maximum duty cycle of 10% when operating LED Arrays at the maximum peak pulsed current specified.
2. Light emitting diodes are not designed to be driven in reverse voltage.

Table 6: Maximum Ratings

| Parameter                  | Maximum Rating                               |
|----------------------------|--|
| LED Junction Temperature   | 150 °C                                       |
| Storage Temperature        | -40 °C to +105 °C                            |
| Operating Case Temperature | 105 °C                                       |
| Soldering Temperature      | 350 °C or lower for a maximum of 3.5 seconds |

## Typical Performance at Alternative Drive Currents

The Bridgelux LED Arrays are tested and binned against the specifications shown in Tables 2, 3 and 4. Customers also have options to drive the LED Arrays at alternative drive currents dependent on the specific application. The typical performance at any drive current can be derived from the flux vs. current characteristics shown in Figures 5 and 6 and from the current vs. voltage characteristics shown in Figures 10 and 11. The typical performance at common drive currents is also summarized in Tables 7 and 8.

Table 7: Typical Product Performance at Alternative Drive Currents

| Color      | ANSI CCT (K) | Part Number       | CRI | Typical DC Luminous Flux $\phi_v$ (lm), $T_{case}=70\text{ }^{\circ}\text{C}$ | Typical Pulsed Luminous Flux $\phi_v$ (lm), $T_j=25\text{ }^{\circ}\text{C}$ | Typical Forward Voltage $V_f$ (V) | Forward Current (mA) <sup>[2]</sup> |
|------------|--------------|-------------------|-----|---|--|-----------------------------------|-------------------------------------|
| Warm White | 2700         | BXRA-27E4000-H-00 | 80  | 2660  | 2970   | 23.4                              | 1400                                |
|            |              |                   |     | 3270  | 3640   | 24.0                              | 1750                                |
|            |              |                   |     | <b>3980</b>   | <b>4450</b>  | <b>24.4</b>                       | <b>2100<sup>(1)</sup></b>           |
|            |              | BXRA-27G4000-H-00 | 90  | 2270  | 2530   | 23.4                              | 1400                                |
|            |              |                   |     | 2790  | 3110   | 24.0                              | 1750                                |
|            |              |                   |     | <b>3400</b>   | <b>3800</b>  | <b>24.4</b>                       | <b>2100<sup>(1)</sup></b>           |
|            |              | BXRA-27E7000-J-00 | 80  | 4910  | 5590   | 29.2                              | 1750                                |
|            |              |                   |     | 5820  | 6630   | 29.8                              | 2100                                |
|            |              |                   |     | <b>6190</b>   | <b>7050</b>  | <b>30.7</b>                       | <b>2800<sup>(1)</sup></b>           |
|            |              | BXRA-27G7000-J-00 | 90  | 4180  | 4755   | 29.2                              | 1750                                |
|            |              |                   |     | 4960  | 5640   | 29.8                              | 2100                                |
|            |              |                   |     | <b>5270</b>   | <b>6000</b>  | <b>30.7</b>                       | <b>2800<sup>(1)</sup></b>           |
|            | 3000         | BXRA-30E4000-H-00 | 80  | 2830  | 3150   | 23.4                              | 1400                                |
|            |              |                   |     | 3480  | 3870   | 24.0                              | 1750                                |
|            |              |                   |     | <b>4230</b>   | <b>4725</b>  | <b>24.4</b>                       | <b>2100<sup>(1)</sup></b>           |
|            |              | BXRA-30G4000-H-00 | 90  | 2480  | 2770   | 23.4                              | 1400                                |
|            |              |                   |     | 3095  | 3400   | 24.0                              | 1750                                |
|            |              |                   |     | <b>3715</b>   | <b>4150</b>  | <b>24.4</b>                       | <b>2100<sup>(1)</sup></b>           |
|            |              | BXRA-30E7000-J-00 | 80  | 5220  | 5960   | 29.2                              | 1750                                |
|            |              |                   |     | 6190  | 7060   | 29.8                              | 2100                                |
|            |              |                   |     | <b>6580</b>   | <b>7500</b>  | <b>30.7</b>                       | <b>2800<sup>(1)</sup></b>           |
|            |              | BXRA-30G7000-J-00 | 90  | 4590  | 5240   | 29.2                              | 1750                                |
|            |              |                   |     | 5440  | 6210   | 29.8                              | 2100                                |
|            |              |                   |     | <b>5790</b>   | <b>6600</b>  | <b>30.7</b>                       | <b>2800<sup>(1)</sup></b>           |

Typical Performance at Alternative Drive Currents (continued)

Table 8: Typical Product Performance at Alternative Drive Currents


| Color         | ANSI CCT (K) | Part Number       | CRI | Typical DC Luminous Flux $\phi_v$ (lm), $T_{case}=70^\circ\text{C}$ | Typical Pulsed Luminous Flux $\phi_v$ (lm), $T_j=25^\circ\text{C}$ | Typical Forward Voltage $V_f$ (V) | Forward Current (mA) <sup>(2)</sup> |
|---------------|--------------|-------------------|-----|---|--|-----------------------------------|-------------------------------------|
| Warm White    | 3500         | BXRA-35E4000-H-00 | 80  | 3130  | 3500   | 23.4                              | 1400                                |
|               |              |                   |     | 3840  | 4300   | 24.0                              | 1750                                |
|               |              |                   |     | <b>4560</b>   | <b>5100</b>  | <b>24.4</b>                       | <b>2100<sup>(1)</sup></b>           |
|               |              | BXRA-35E7000-J-00 | 80  | 5640  | 6430   | 29.2                              | 1750                                |
|               |              |                   |     | 6680  | 7620   | 29.8                              | 2100                                |
|               |              |                   |     | <b>7110</b>   | <b>8100</b>  | <b>30.7</b>                       | <b>2800<sup>(1)</sup></b>           |
| Neutral White | 4000         | BXRA-40E4500-H-00 | 80  | 3210  | 3610   | 23.4                              | 1400                                |
|               |              |                   |     | 3940  | 4435   | 24.0                              | 1750                                |
|               |              |                   |     | <b>4830</b>   | <b>5400</b>  | <b>24.4</b>                       | <b>2100<sup>(1)</sup></b>           |
|               |              | BXRA-40E7500-J-00 | 80  | 5955  | 6790   | 29.2                              | 1750                                |
|               |              |                   |     | 7060  | 8050   | 29.8                              | 2100                                |
|               |              |                   |     | <b>7500</b>   | <b>8550</b>  | <b>30.7</b>                       | <b>2800<sup>(1)</sup></b>           |
| Cool White    | 5000         | BXRA-50C5300-H-00 | 70  | 3590  | 4000   | 23.4                              | 1400                                |
|               |              |                   |     | 4400  | 4925   | 24.0                              | 1750                                |
|               |              |                   |     | <b>5370</b>   | <b>6000</b>  | <b>24.4</b>                       | <b>2100<sup>(1)</sup></b>           |
|               |              | BXRA-50C9000-J-00 | 70  | 6795  | 7740   | 29.2                              | 1750                                |
|               |              |                   |     | 8050  | 9170   | 29.8                              | 2100                                |
|               |              |                   |     | <b>8560</b>   | <b>9750</b>  | <b>30.7</b>                       | <b>2800<sup>(1)</sup></b>           |
|               | 5600         | BXRA-56C5300-H-00 | 70  | 3590  | 4000   | 23.4                              | 1400                                |
|               |              |                   |     | 4400  | 4920   | 24.0                              | 1750                                |
|               |              |                   |     | <b>5370</b>   | <b>6000</b>  | <b>24.4</b>                       | <b>2100<sup>(1)</sup></b>           |
|               |              | BXRA-56C9000-J-00 | 70  | 6795  | 7740   | 29.2                              | 1750                                |
|               |              |                   |     | 8050  | 9170   | 29.8                              | 2100                                |
|               |              |                   |     | <b>8560</b>   | <b>9750</b>  | <b>30.7</b>                       | <b>2800<sup>(1)</sup></b>           |

Notes for Table 7 and 8:

1. Product is tested and binned at the specified drive current.
2. Operating these LED Arrays at or below the drive currents listed in Tables 7 and 8, with a case temperature maintained at or below 85°C, will enable the average lumen maintenance projection outlined earlier in this Product Data Sheet.

## Mechanical Dimensions



Figure 1: Drawing for RS Arrays

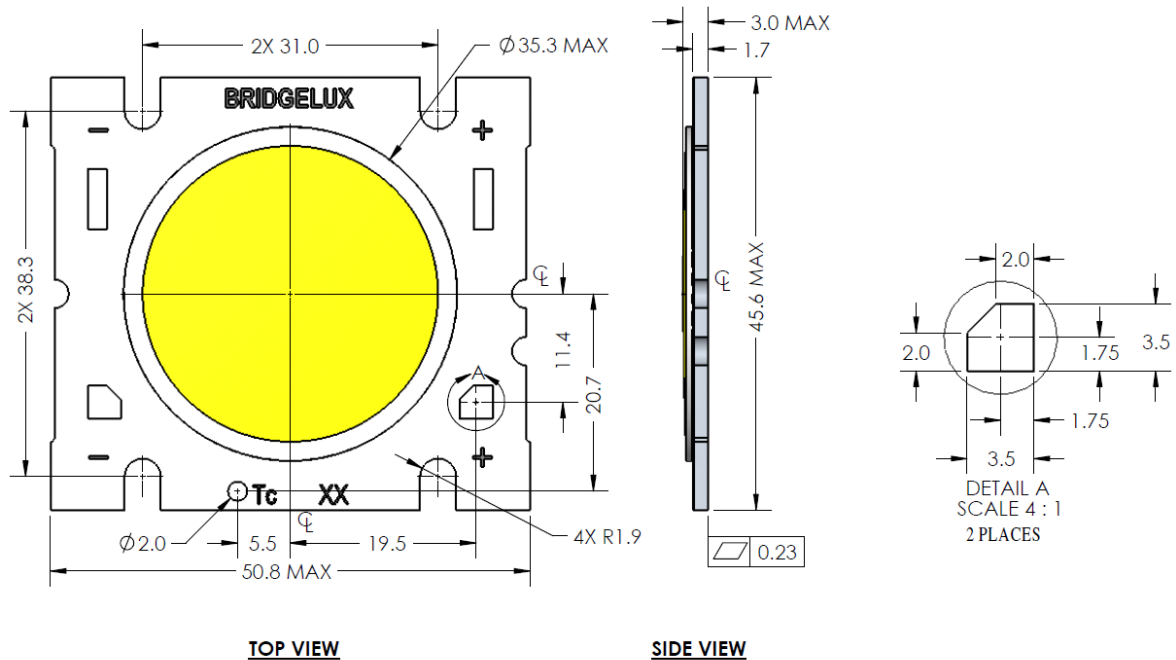


### Notes for Figure 1:

1. Slots are for M2.5, M3 or #4 screws.
2. Solder pads are labeled "+" and "-" to denote positive and negative, respectively.
3. It is not necessary to provide electrical connections to both sets of solder pads. Either set of solder pads (6.35 x 2.03 mm rectangular pads or 3.50 mm tapered square pads) may be used depending on application specific design requirements.
4. Drawings are not to scale.
5. Drawing dimensions are in millimeters.
6. Bridgelux recommends four tapped holes for mounting screws – refer to product Application Note AN11 for recommended spacing of holes.
7. Unless otherwise specified, tolerances are  $\pm 0.10$  mm.
8. Refer to product Application Notes AN10 and AN11 for product handling, mounting and heat sink recommendations.
9. The optical center of the LED Array is defined by the mechanical center of the array.
10. Bridgelux maintains a flatness of 0.25 mm across the mounting surface of the array. Refer to Application Notes AN10 and AN11 for product handling, mounting and heat sink recommendations.



## Typical Radiation Pattern

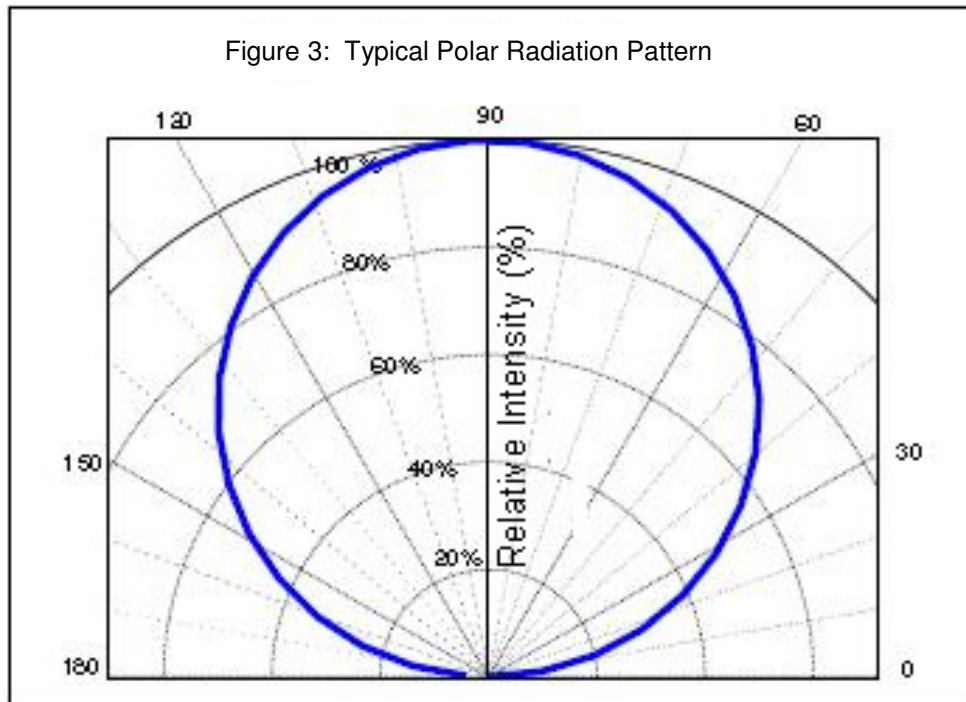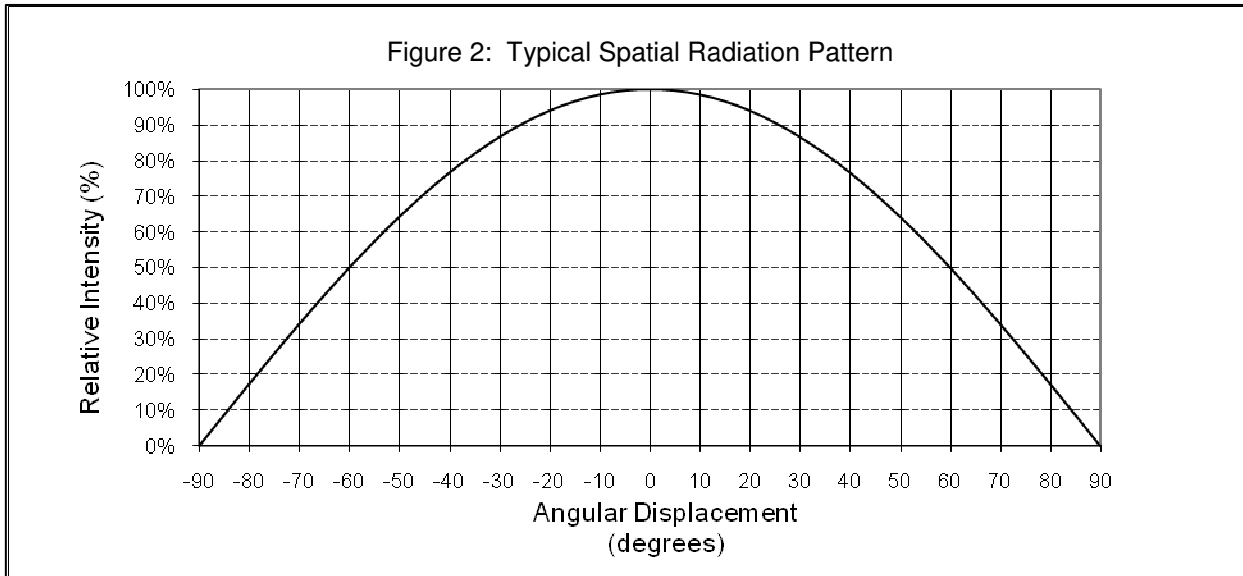

Wavelength Characteristics at Rated Test Current,  $T_j=25^\circ\text{C}$

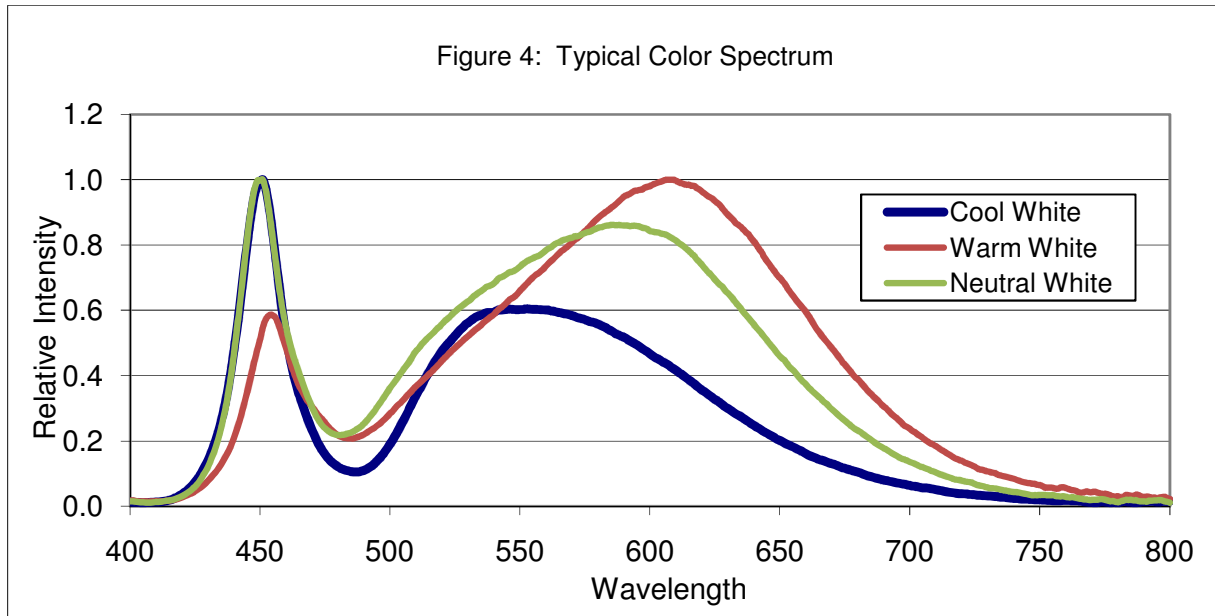


Typical Relative Luminous Flux vs. Current,  $T_j=25^\circ\text{C}$

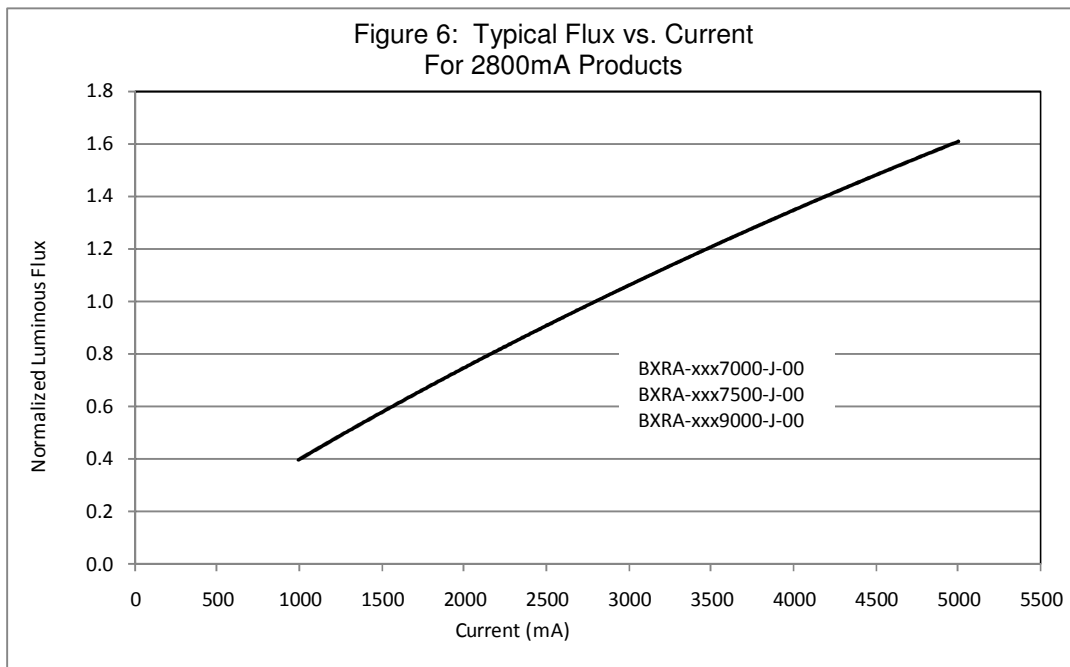
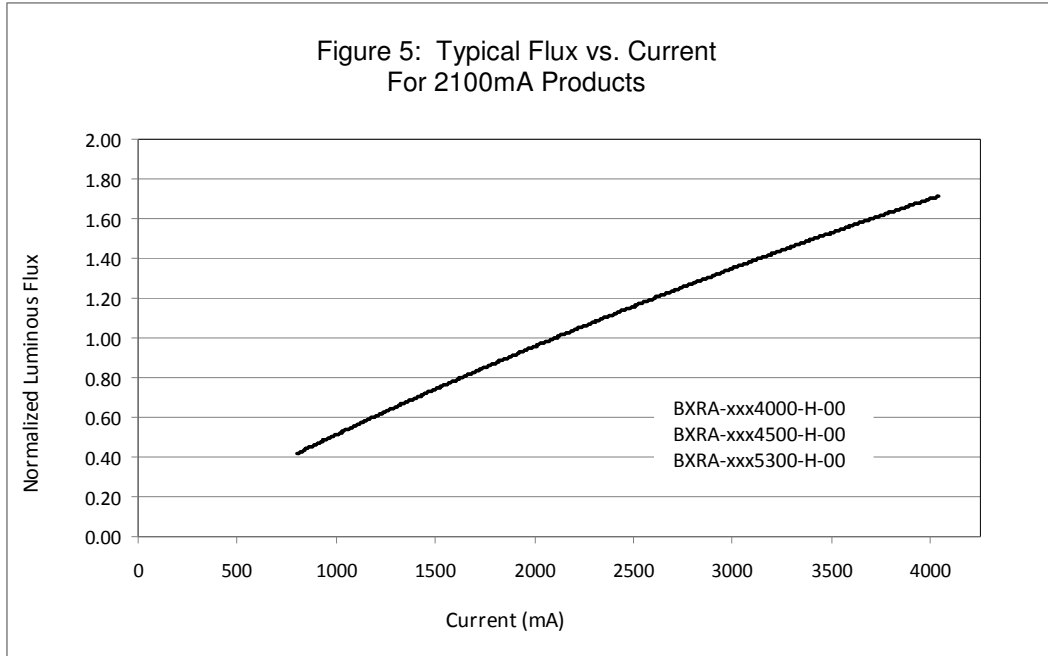






## Typical Light Output Characteristics vs. Temperature

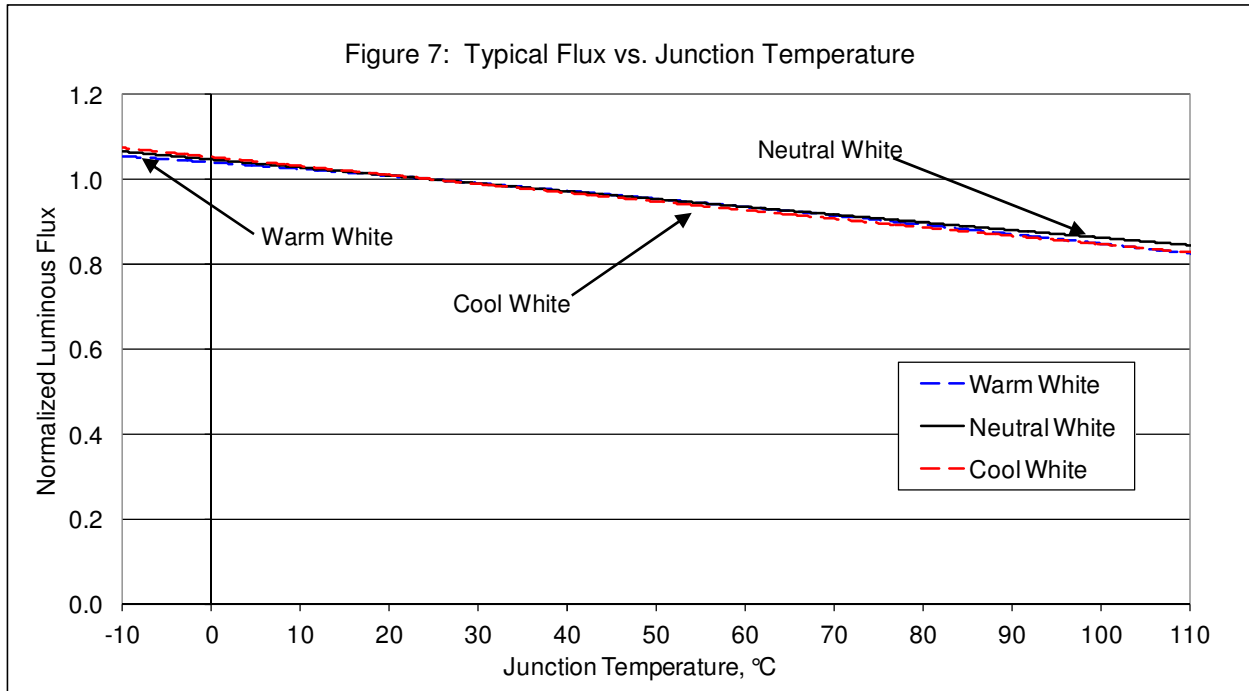

## Typical Chromaticity Characteristics vs. Temperature

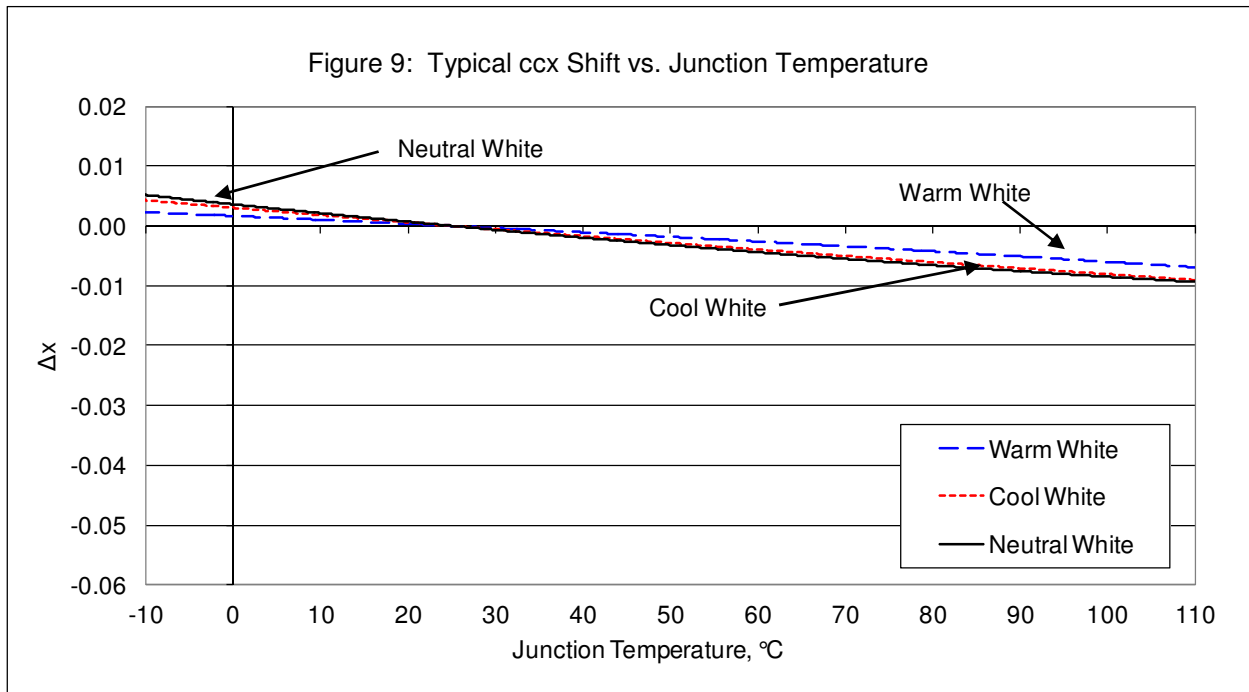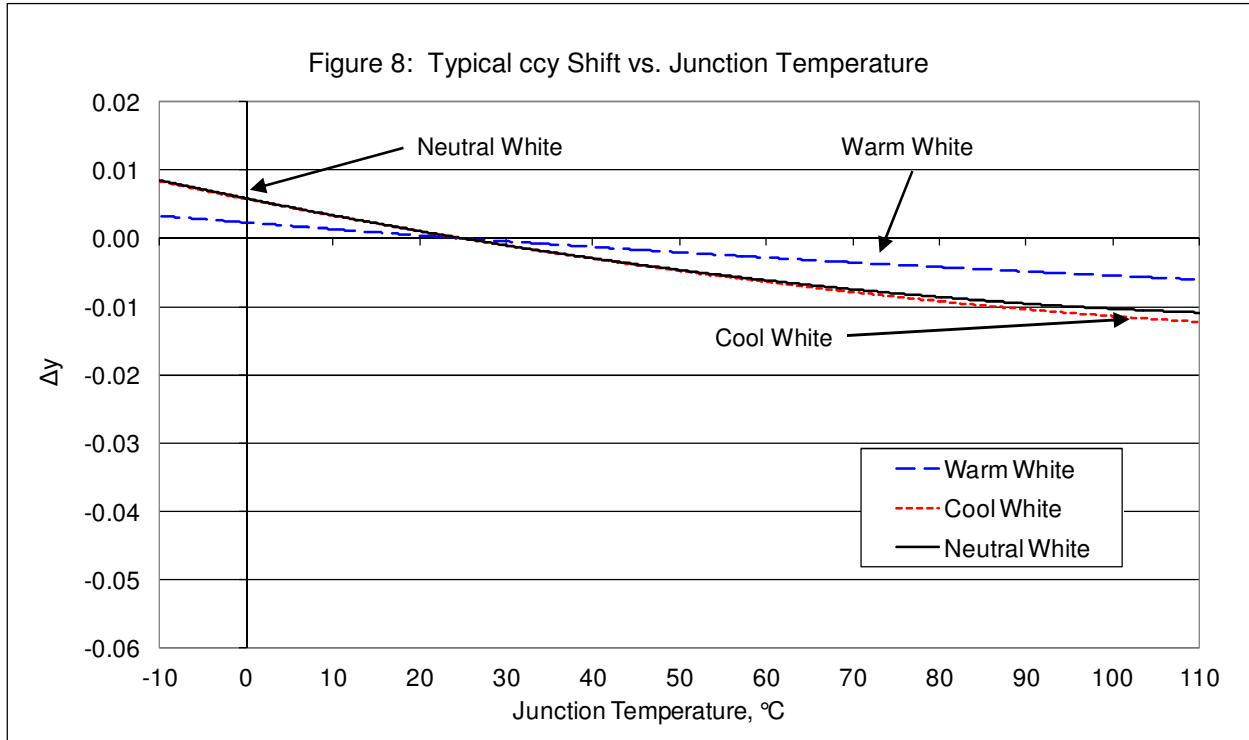

Forward Current Characteristics

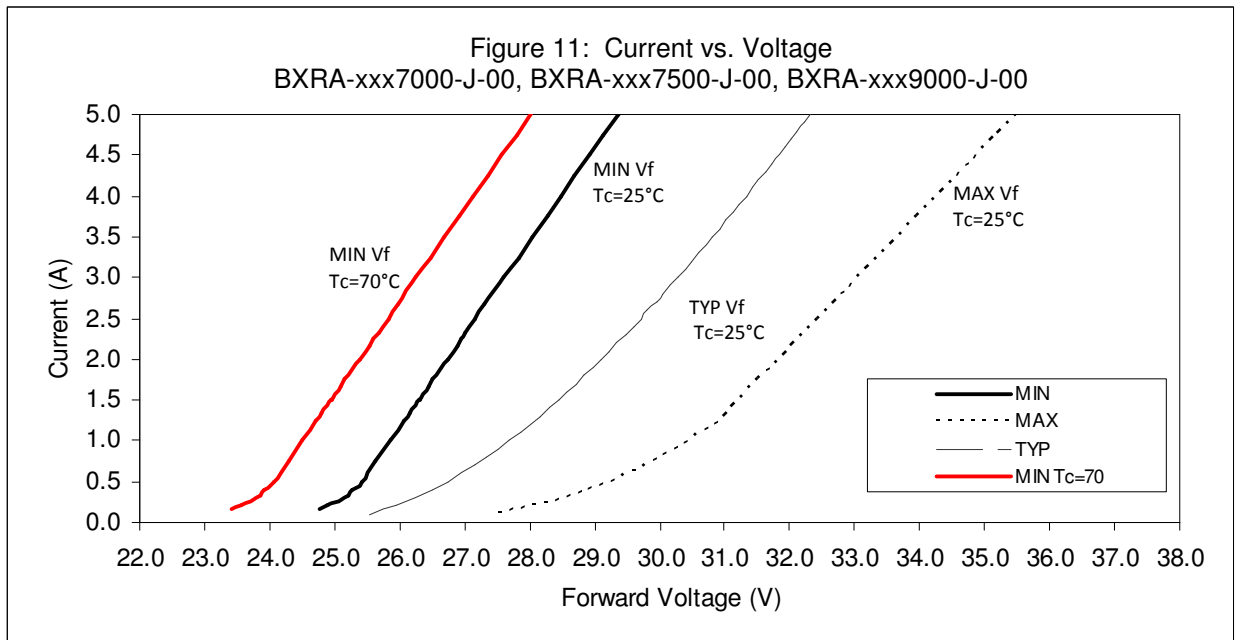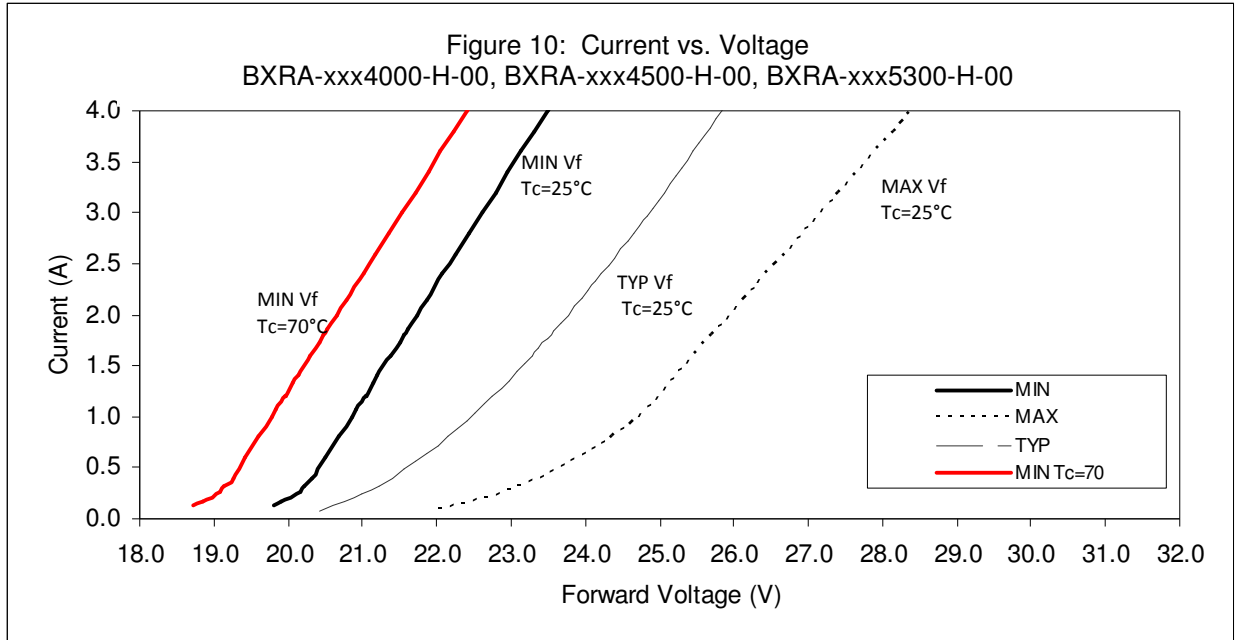

## Color Binning Information

Figure 12: Graph of Warm White Test Bins in xy Color Space

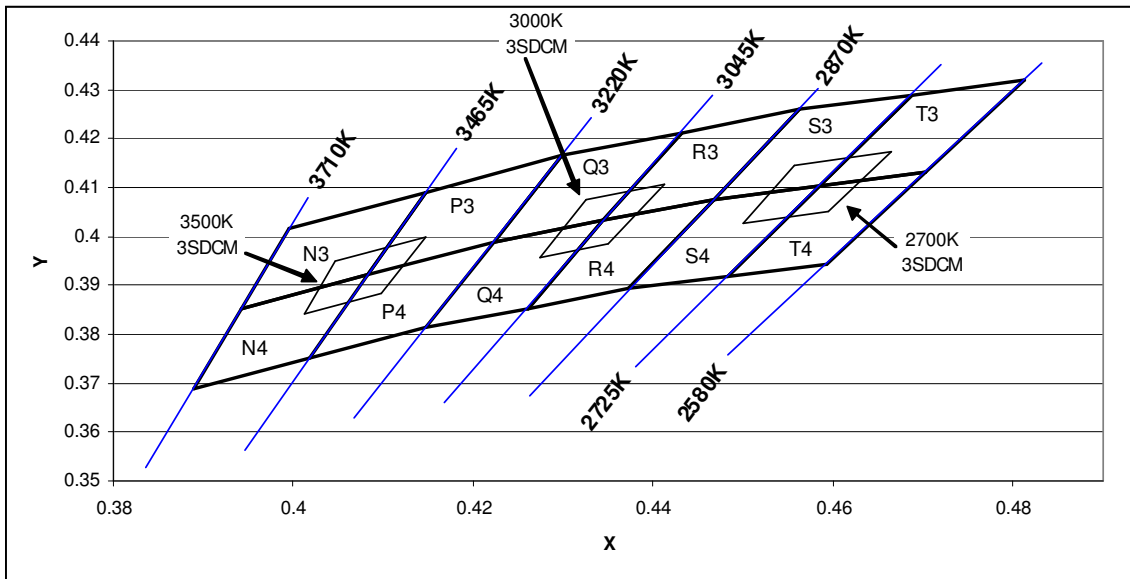


Table 9: Warm White xy Bin Coordinates and Associated Typical CCT

| Bin Code      | X      | Y      | ANSI CCT (K) | Bin Code      | X      | Y      | ANSI CCT (K) | Bin Code      | X      | Y      | ANSI CCT (K) |
|---------------|--------|--------|--------------|---------------|--------|--------|--------------|---------------|--------|--------|--------------|
| Q3            | 0.4223 | 0.3990 | 3000         | S3            | 0.4468 | 0.4077 | 2700         | N4            | 0.3943 | 0.3853 | 3500         |
|               | 0.4299 | 0.4165 |              |               | 0.4562 | 0.4260 |              |               | 0.3996 | 0.4015 |              |
|               | 0.4431 | 0.4213 |              |               | 0.4688 | 0.4290 |              |               | 0.4148 | 0.4090 |              |
|               | 0.4345 | 0.4033 |              |               | 0.4585 | 0.4104 |              |               | 0.4083 | 0.3921 |              |
| Q4            | 0.4147 | 0.3814 | 3000         | S4            | 0.4373 | 0.3893 | 2700         | N3            | 0.3889 | 0.3690 | 3500         |
|               | 0.4223 | 0.3990 |              |               | 0.4468 | 0.4077 |              |               | 0.3943 | 0.3853 |              |
|               | 0.4345 | 0.4033 |              |               | 0.4585 | 0.4104 |              |               | 0.4083 | 0.3921 |              |
|               | 0.4260 | 0.3854 |              |               | 0.4483 | 0.3919 |              |               | 0.4018 | 0.3752 |              |
| R3            | 0.4345 | 0.4033 | 3000         | T4            | 0.4585 | 0.4104 | 2700         | P3            | 0.4083 | 0.3921 | 3500         |
|               | 0.4431 | 0.4213 |              |               | 0.4688 | 0.4290 |              |               | 0.4148 | 0.4090 |              |
|               | 0.4562 | 0.4260 |              |               | 0.4813 | 0.4319 |              |               | 0.4299 | 0.4165 |              |
|               | 0.4468 | 0.4077 |              |               | 0.4703 | 0.4132 |              |               | 0.4223 | 0.3990 |              |
| R4            | 0.4260 | 0.3854 | 3000         | T3            | 0.4483 | 0.3919 | 2700         | P4            | 0.4018 | 0.3752 | 3500         |
|               | 0.4345 | 0.4033 |              |               | 0.4585 | 0.4104 |              |               | 0.4083 | 0.3921 |              |
|               | 0.4468 | 0.4077 |              |               | 0.4703 | 0.4132 |              |               | 0.4223 | 0.3990 |              |
|               | 0.4373 | 0.3893 |              |               | 0.4593 | 0.3944 |              |               | 0.4147 | 0.3814 |              |
| X3<br>(3SDCM) | 0.4413 | 0.4107 | 3000         | X3<br>(3SDCM) | 0.4656 | 0.4174 | 2700         | X3<br>(3SDCM) | 0.4148 | 0.4000 | 3500         |
|               | 0.4325 | 0.4075 |              |               | 0.4573 | 0.4154 |              |               | 0.4047 | 0.3950 |              |
|               | 0.4274 | 0.3958 |              |               | 0.4510 | 0.4032 |              |               | 0.4012 | 0.3841 |              |
|               | 0.4350 | 0.3984 |              |               | 0.4583 | 0.4049 |              |               | 0.4098 | 0.3883 |              |

Color Binning Information (continued)

Figure 13: Graph of Neutral White Test Bins in xy Color Space

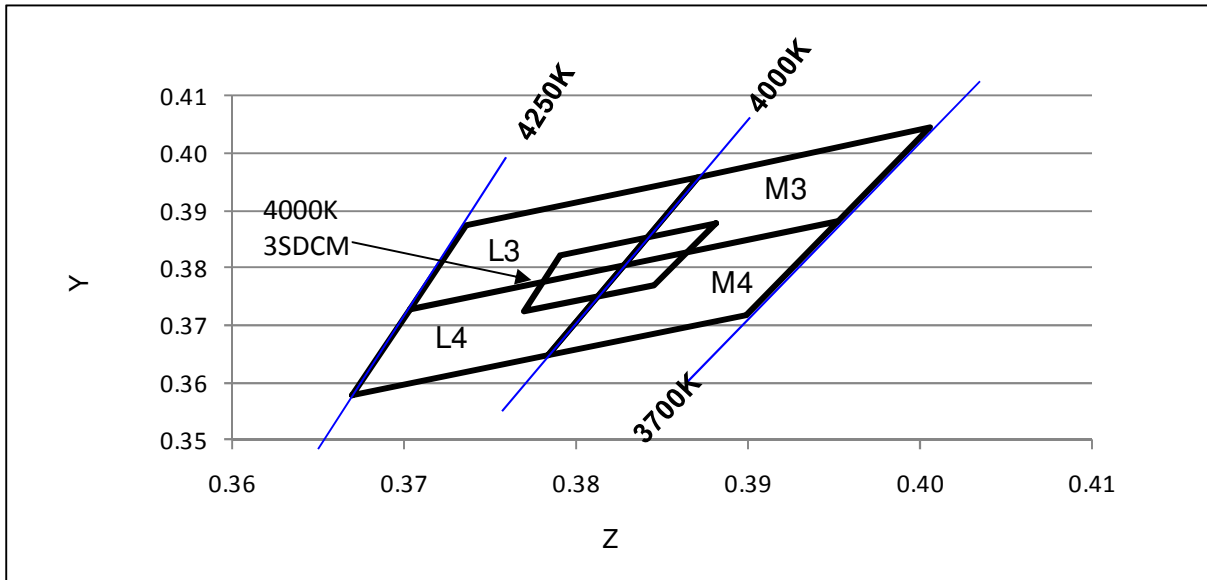


Table 10: Neutral White xy Bin Coordinates and Associated Typical CCT

| Bin Code      | X      | Y      | ANSI CCT (K) |
|---------------|--------|--------|--------------|
| L3            | 0.3703 | 0.3726 | 4000         |
|               | 0.3736 | 0.3874 |              |
|               | 0.3871 | 0.3959 |              |
|               | 0.3828 | 0.3803 |              |
| L4            | 0.3670 | 0.3578 | 4000         |
|               | 0.3703 | 0.3726 |              |
|               | 0.3828 | 0.3803 |              |
|               | 0.3784 | 0.3647 |              |
| M3            | 0.3828 | 0.3803 | 4000         |
|               | 0.3871 | 0.3959 |              |
|               | 0.4006 | 0.4044 |              |
|               | 0.3952 | 0.3880 |              |
| M4            | 0.3784 | 0.3647 | 4000         |
|               | 0.3828 | 0.3803 |              |
|               | 0.3952 | 0.3880 |              |
|               | 0.3898 | 0.3716 |              |
| X3<br>(3SDCM) | 0.3881 | 0.3879 | 4000         |
|               | 0.3791 | 0.3823 |              |
|               | 0.3769 | 0.3724 |              |
|               | 0.3845 | 0.3770 |              |

Color Binning Information (continued)

Figure 14: Graph of Cool White Test Bins in xy Color Space

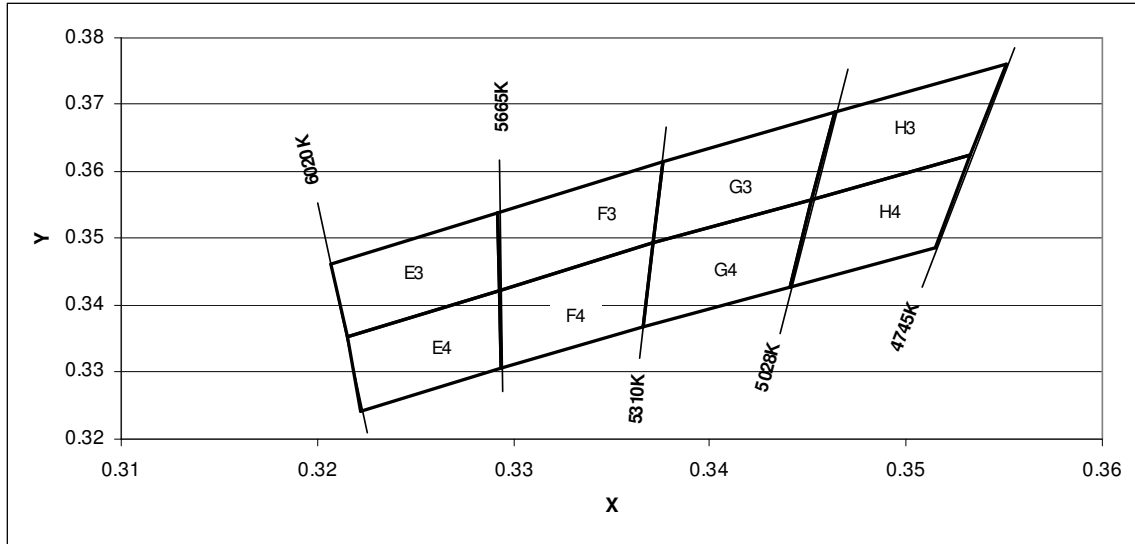


Table 11: Cool White xy Bin Coordinates and Associated Typical CCT

| Bin Code | X      | Y      | ANSI CCT (K) |
|----------|--------|--------|--------------|
| G3       | 0.3376 | 0.3616 | 5000         |
|          | 0.3464 | 0.3688 |              |
|          | 0.3452 | 0.3558 |              |
|          | 0.3371 | 0.3493 |              |
| G4       | 0.3371 | 0.3493 | 5000         |
|          | 0.3452 | 0.3558 |              |
|          | 0.3441 | 0.3428 |              |
|          | 0.3366 | 0.3369 |              |
| H3       | 0.3464 | 0.3688 | 5000         |
|          | 0.3551 | 0.376  |              |
|          | 0.3533 | 0.3624 |              |
|          | 0.3452 | 0.3558 |              |
| H4       | 0.3452 | 0.3558 | 5000         |
|          | 0.3533 | 0.3624 |              |
|          | 0.3515 | 0.3487 |              |
|          | 0.3441 | 0.3428 |              |
| E3       | 0.3215 | 0.3353 | 5600         |
|          | 0.3293 | 0.3423 |              |
|          | 0.3292 | 0.3539 |              |
|          | 0.3207 | 0.3462 |              |
| E4       | 0.3222 | 0.3243 | 5600         |
|          | 0.3294 | 0.3306 |              |
|          | 0.3293 | 0.3423 |              |
|          | 0.3215 | 0.3353 |              |
| F3       | 0.3292 | 0.3539 | 5600         |
|          | 0.3293 | 0.3423 |              |
|          | 0.3371 | 0.3493 |              |
|          | 0.3376 | 0.3616 |              |
| F4       | 0.3294 | 0.3306 | 5600         |
|          | 0.3366 | 0.3369 |              |
|          | 0.3371 | 0.3493 |              |
|          | 0.3293 | 0.3423 |              |

---

## Design Resources

Bridgelux has developed a comprehensive set of application notes and design resources to assist customers in successfully designing with Bridgelux LED Array products. Included below is a list of available resources which can be downloaded from the Bridgelux web site under the Design Resources section. These documents are updated regularly as new information becomes available, including complimentary infrastructure products such as commercially available secondary optics and electronic driver solutions.

### Application Notes

- AN10: Effective Thermal Management of Bridgelux LED Arrays
- AN11: Assembly Considerations for Bridgelux LED Arrays
- AN12: Electrical Drive Considerations for Bridgelux LED Arrays
- AN14: Reliability Data Sheet for Bridgelux LED Arrays
- AN15: Reflow Soldering of Bridgelux LED Arrays
- AN16: Optical Considerations for Bridgelux LED Arrays

### Optical Source Models

Optical source models and ray set files are available for all Bridgelux LED Array products, and can be downloaded directly from the Bridgelux web site. The list below contains the formats currently available. If you require a specific format not included in this list, please contact your Bridgelux sales representative for assistance.

- Zemax
- ASAP
- IESNA
- LightTools
- LucidShape
- OPTIS SPEOS
- PHOTOPIA
- TracePro
- Radiant Imaging Source Model

### 3D CAD Models

Three dimensional CAD models depicting the product outline of all Bridgelux LED Arrays are available in both SAT and STEP formats. These CAD files can be downloaded directly from the Bridgelux web site.

---

## About Bridgelux

Bridgelux is a leading developer and manufacturer of technologies and solutions transforming the \$40 billion global lighting industry into a \$100 billion market opportunity. Based in Livermore, California, Bridgelux is a pioneer in solid-state lighting (SSL), expanding the market for light-emitting diode (LED) technologies by driving down the cost of LED lighting systems. Bridgelux's patented light source technology replaces traditional technologies (such as incandescent, halogen, fluorescent and high intensity discharge lighting) with integrated, solid-state lighting solutions that enable lamp and luminaire manufacturers to provide high performance and energy-efficient white light for the rapidly growing interior and exterior lighting markets, including street lights, commercial lighting and consumer applications. With more than 550 patent applications filed or granted worldwide, Bridgelux is the only vertically integrated LED manufacturer and developer of solid-state light sources that designs its solutions specifically for the lighting industry.

For more information about the company, please visit [www.bridgelux.com](http://www.bridgelux.com)

© 2011 Bridgelux, Inc. All rights reserved. Product specifications are subject to change without notice.





单击下面可查看定价，库存，交付和生命周期等信息

[>>Bridgelux\(普瑞光电\)](#)