# EVERLIGHT ELECTRONICS CO.,LTD.

#### **Technical Data Sheet**

# 0402 Package Chip LED

## 16-213SDRC/S530-XX/TR8

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

#### **Descriptions**

- The 16-213 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

#### **Applications**

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.



#### **Device Selection Guide**

	T 0.1	
Material	<b>Emitted Color</b>	Lens Color
AlGaInP	Deep - Red	Water Clear

Everlight Electronics Co., Ltd.

Device No:DSE-163-016

http://www.everlight.com


Prepared date: 16-Aug-2005

Rev 2

Page: 1 of 10



## **Package Outline Dimensions**

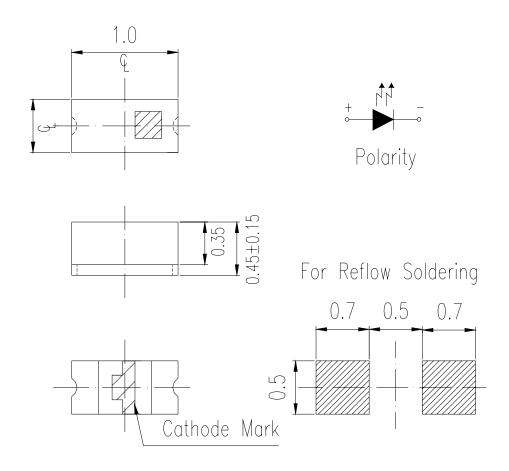

**Note:** Tolerances Unless Dimension  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:DSE-163-016

http://www.everlight.com

Prepared date: 16-Aug-2005

Rev 2

Page: 2 of 10



# **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	260 (for 5 second)	$^{\circ}\!\mathbb{C}$
Electrostatic Discharge (HBM)	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current (Duty 1/10 @1KHz)	IF	60	mA
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec.  Hand Soldering: 350 °C for 3 sec.	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Device No:DSE-163-016

Prepared date: 16-Aug-2005 Prepared by: Ashley Kuo.

Page: 3 of 10



# Electro-Optical Characteristics (Ta=25 $^{\circ}$ C)

Parameter	Symbol	*Chip Rank	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	A2	12	30		mcd	I <sub>F</sub> =20 mA
		A3	22	43			
		A4	27	59			
		A5	37	73			
		A6	47	89			
Viewing Angle	2 \theta 1/2			120		deg	I <sub>F</sub> =20mA
Peak Wavelength	λp			650		nm	I <sub>F</sub> =20mA
Dominant Wavelength	λd			639		nm	I <sub>F</sub> =20mA
Spectrum Radiation Bandwidth	Δλ			20		nm	I <sub>F</sub> =20mA
Forward Voltage	VF		1.7	2.0	2.4	V	I <sub>F</sub> =20mA
Reverse Current	Ir				10	$\mu$ A	V <sub>R</sub> =5V

\*16-213SDRC/S530<u>-XX/</u>TR8


Chip Rank


Everlight Electronics Co., Ltd. Device No:DSE-163-016 http://www.everlight.com Prepared date: 16-Aug-2005 Rev 2


Page: 4 of 10





#### **Typical Electro-Optical Characteristics Curves**














Prepared date: 16-Aug-2005 Prepared by: Ashley Kuo.



## Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 



#### **Reel Dimensions**

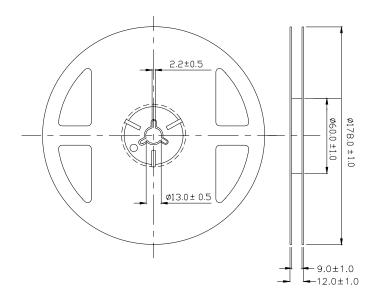

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd.

Device No:DSE-163-016

http://www.everlight.com


Prepared date: 16-Aug-2005

Rev 2

Page: 6 of 10




#### Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

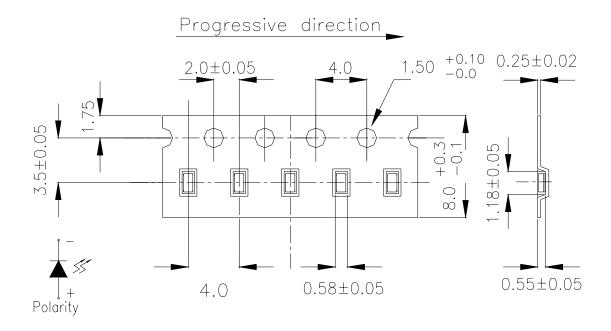

**Note:** Tolerances Unless Dimension  $\pm 0.1$ mm, Unit = mm

#### **Moisture Resistant Packaging**

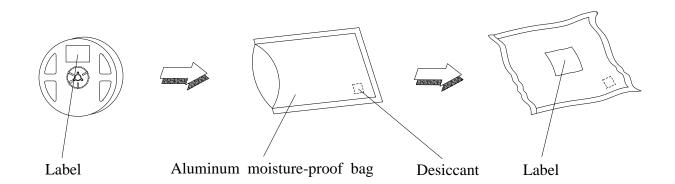

Everlight Electronics Co., Ltd. Device No:DSE-163-016

http://www.everlight.com

Prepared date: 16-Aug-2005

Rev 2

Page: 7 of 10



#### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int$ 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min  ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. Device No:DSE-163-016

http://www.everlight.com Prepared date: 16-Aug-2005 Rev 2

Page: 8 of 10


#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package: The LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
  - 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
  - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

    Baking treatment: 60±5°C for 24 hours.
  - 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

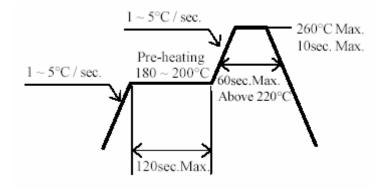

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd.

Device No:DSE-163-016

http://www.everlight.com

Prepared date: 16-Aug-2005

Rev 2

Page: 9 of 10




#### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

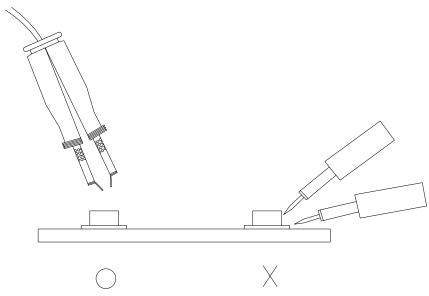

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www Device No:DSE-163-016 Prepared of

http://www.everlight.com

Rev 2

Page: 10 of 10

Prepared date: 16-Aug-2005

# 单击下面可查看定价,库存,交付和生命周期等信息

>>Everlight(亿光)