EVERLIGHT ELECTRONICS CO.,LTD.

Technical Data Sheet

Chip LED with Bi-Color(Multi-Color)

19-223/R6GHC-A01/2T

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Multi-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.



- The 19-223 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.
- Indoor signboard use.

Device Selection Guide

Chip		F '' 101	Long Colon	
Туре	Material	Emitted Color	Lens Color	
R6	AlGaInP	Brilliant Red	W. G	
GH	InGaN	Brilliant Green	Water Clear	



Everlight Electronics Co., Ltd. Device No:SZDSE-192-A18

http://www.everlight.com


Prepared date: 12-Oct-2006

Rev 1 Page: 1 of 11

Prepared by: Xiaoyan



Package Outline Dimensions

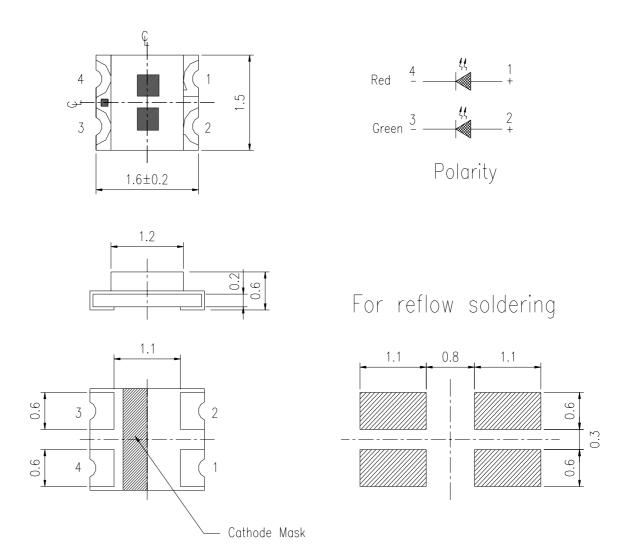

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm



Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	5	V	
Forward Current	I_{F}	25	mA	
Peak Forward Current		R6:60		
(Duty 1/10 @1KHz)	I_{FP}	GH:100	mA	
		R6:60		
Power Dissipation	Pd	GH:110	mW	
	Eap	R6:2000	**	
Electrostatic Discharge(HBM)	ESD	GH:150	V	
Operating Temperature	Topr	-40 ~ +85	${\mathbb C}$	
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!$	
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec.		
Soldering Temperature	1 801	Hand Soldering: 350 °C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv R6			112 225	mcd	
Viewing Angle	2 0 1/2		130		deg	
Peak Wavelength	λp R6 GH		632 518		nm	
Dominant Wavelength	λd R6		624 525		nm	IF=20mA
Spectrum Radiation Bandwidth	△λ R6		20 35		nm	
Forward Voltage	VF R6	1.7 2.7	2.0 3.3	2.4 3.7	V	
Reverse Current	IR R6			10 50	μ A	VR=5V

Note: 1.Tolerance of Luminous Intensity ±10%

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 3 of 11

Device No:SZDSE-192-A18 Prepared date: 12-Oct-2006 Prepared by: Xiaoyan



R6

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
P	45.0	72.0	1	1 20 1
Q	72.0	112	mcd	I _F =20mA

GH

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
R1	112	140		
R2	140	180	mcd	I _F =20mA
S1	180	225		

Note:

1. Tolerance of Luminous Intensity ±10%

Everlight Electronics Co., Ltd. Device No:SZDSE-192-A18

http://www.everlight.com Prepared date: 12-Oct-2006

Prepared by: Xiaoyan

Page: 4 of 11


Rev 1





EVERLIGHT ELECTRONICS CO.,LTD.


19-223/R6GHC-A01/2T


Typical Electro-Optical Characteristics Curves R6















Prepared date: 12-Oct-2006

Typical Electro-Optical Characteristics Curves

GH

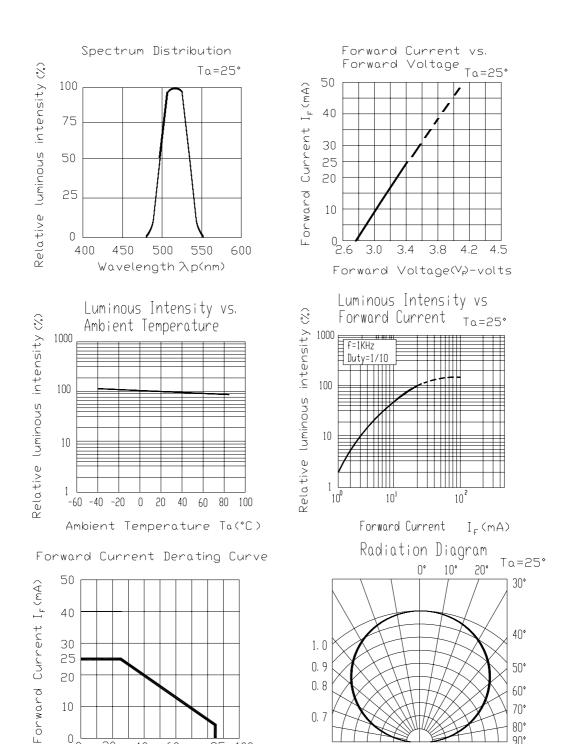

100 85

60

Ambient Temperature Ta(°C)

40

0.7

0.5 0.3

0.1 0.2 0.4 0.6

80°



Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

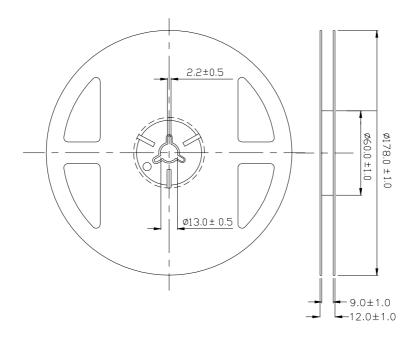

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:SZDSE-192-A18


http://www.everlight.com

Prepared date: 12-Oct-2006

Rev 1 Page: 7 of 11 Prepared by: Xiaoyan




Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

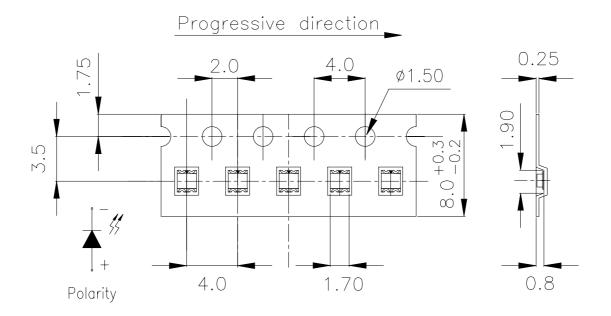

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

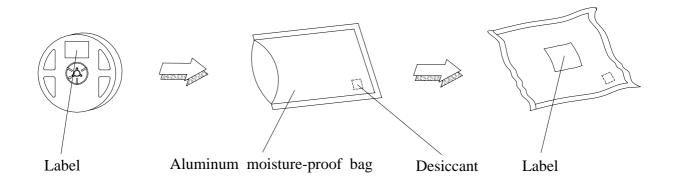

Everlight Electronics Co., Ltd. Device No:SZDSE-192-A18

http://www.everlight.com

Prepared date: 12-Oct-2006

Rev 1 Page: 8 of 11 Prepared by: Xiaoyan



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. Device No:SZDSE-192-A18

http://www.everlight.com

Prepared date: 12-Oct-2006 Prepared by: Xiaoyan

Rev 1

Page: 9 of 11


Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

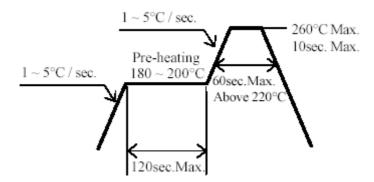

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 10 of 11

Device No:SZDSE-192-A18 Prepared date: 12-Oct-2006 Prepared by: Xiaoyan



5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

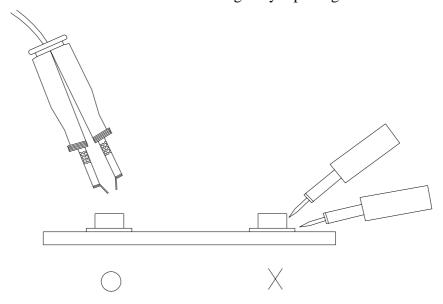

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. Device No:SZDSE-192-A18

http://www.everlight.com

Prepared date: 12-Oct-2006

Rev 1 Page: 11 of 11

Prepared by: Xiaoyan

单击下面可查看定价,库存,交付和生命周期等信息

>>Everlight(亿光)