EVERLIGHT

DATASHEET

SMD • REFLECTOR 67-21/GBC-YV2W2N/2T



Features

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow

and wave solder processes.

- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free
- The product itself will remain within RoHS compliant version

Descriptions

• The 67-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes TOP LED ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- Light pipe application.
- General use.

"ired Period: Forever

Device Selection Guide

Chip Materials	Emitted Color	Resin Color
InGaN/SiC	Brilliant Green	Water Clear

Absolute Maximum Ratings (Ta=25)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V _R	5	V	
Forward Current	I _F	30	mA	
Peak Forward Current (Duty 1/10 @1KHz)	I _{FP}	100	mA	
Power Dissipation	Pd	110	mW	
Electrostatic Discharge (HBM)	ESD	1000	V	
Operating Temperature	T _{opr}	-40 ~ +85		
Storage Temperature	Tstg	-40 ~ +90		
Soldering Temperature	T _{sol}	Reflow Soldering : 260for 30 sec.Hand Soldering : 350for 3 sec.		

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	lv	900		1800	mcd	I _F =20mA
Viewing Angle	20 _{1/2}		120		deg	I _F =20mA
Peak Wavelength	λр		518		nm	I _F =20mA
Dominant Wavelength	λd	520		535	nm	I _F =20mA
Spectrum Radiation Bandwidth	Δλ		35		nm	I _F =20mA
Forward Voltage	V_{F}	2.7		3.7	V	I _F =20mA
Reverse Current	I _R			50	μA	V _R =5V

Note:

1. Tolerance of Luminous Intensity: ±11%

2. Tolerance of Dominant Wavelength: ±1nm

3. Tolerance of Forward Voltage: ±0.1V



Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
V2	900	1120		
W1	1120	1420	mcd	I _F =20mA
W2	1420	1800		

Note:

Tolerance of Luminous Intensity: ±11%

Bin Range of Dominant Wavelength

Bin Code	Min.	Max.	Unit	Condition
Х	520	525		
<u>Y</u>	525	530	nm	I _F =20mA
Z	530	535		
Note: Tolerance of Dominant Wa	avelength: ±1nm			
Bin Range of Forv	vard Voltage			

Bin Range of Forward Voltage


Bin Code	Min.	Max.	Unit	Condition
10	2.70	2.90		
11	2.90	3.10		
12	3.10	3.30	V	IF=20mA
13	3.30	3.50		-
14	3.50	3.70		


Note:

Tolerance of Forward Voltage : ±0.1V

ired Period: Forever

Typical Electro-Optical Characteristics

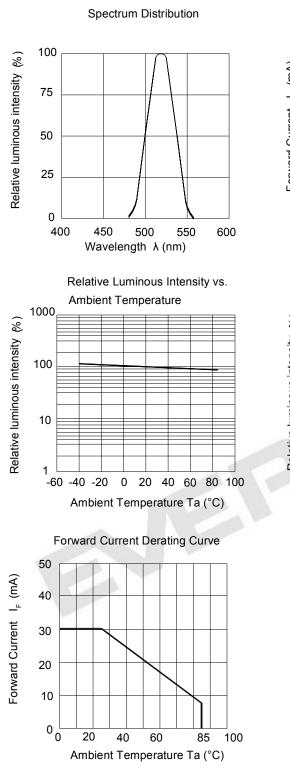

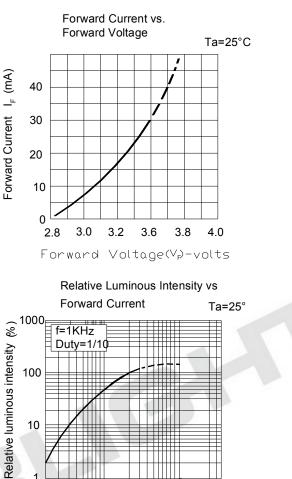


10 10 Forward Current I (mA)

Radiation Diagram

1

10



mired Period: Forever

Copyright © 2010, Everlight All Rights Reserved. Release Date : 09.Feb.2015. Issue No: DSE-0000955


www.everlight.com

LifecyclePhase: Approved

Downloaded From Oneyac.com


EVERLIGHT

Package Dimensions







Polarity





For reflow soldering (Proposal)






R 5 Copyright © 2010, Everlight All Rights Reserved. Release Date : 09.Feb.2015. Issue No: DSE-0000955


Downloaded From Oneyac.com

Moisture Resistant Packing Materials

CAT: Luminous Intensity Rank HUE: Dom. Wavelength Rank REF: Forward Voltage Rank Label Explanation CAT: Luminous Intensity Rank HUE: Dom. Wavelength Rank REF: Forward Voltage Rank

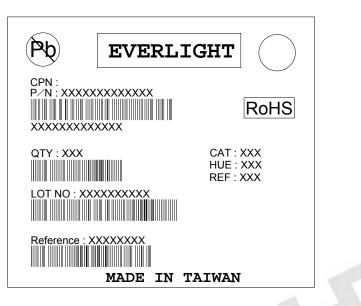

Reel Dimensions

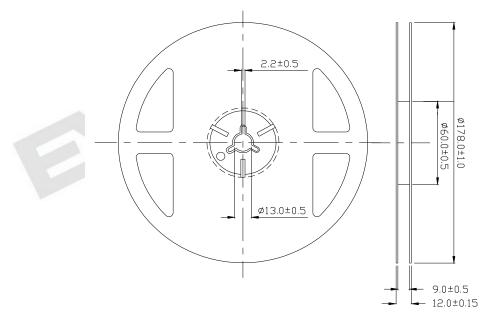

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

R 6 Copyright © 2010, Everlight All Rights Reserved. Release Date : 09.Feb.2015. Issue No: DSE-0000955


····ired Period: Forever

LifecyclePhase: Approved

Downloaded From Oneyac.com



Carrier Tape Dimensions: Loaded Quantity 2000 pcs Per Reel.

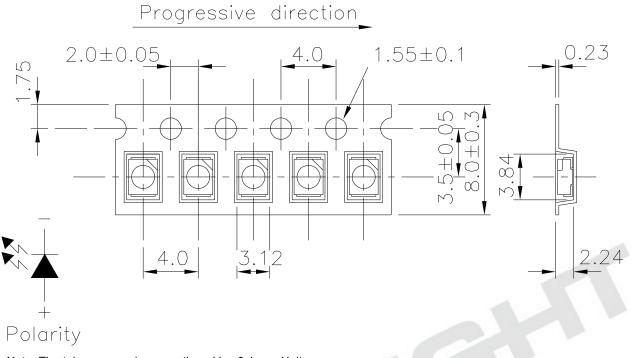



Note: The tolerances unless mentioned is ±0.1mm; Unit = mm

Moisture Resistant Packaging









"ired Period: Forever

Label

Aluminum moisture-proof bag

Desiccant

Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below. Confidence level : 90% LTPD : 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260 ±5 Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100 15min ∫ 5 min L : -40 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100 5min ∫ 10 sec L : -10 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85 / 85%RH	1000 Hrs.	22 PCS.	0/1

Precautions for Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at 30 or less and 90%RH or less.


2.3 After opening the package: The LED's floor life are 168 hours under 30 or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment : 60±5 for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

3

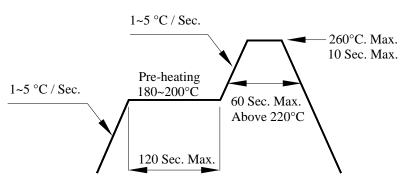

····ired Period: Forever




- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

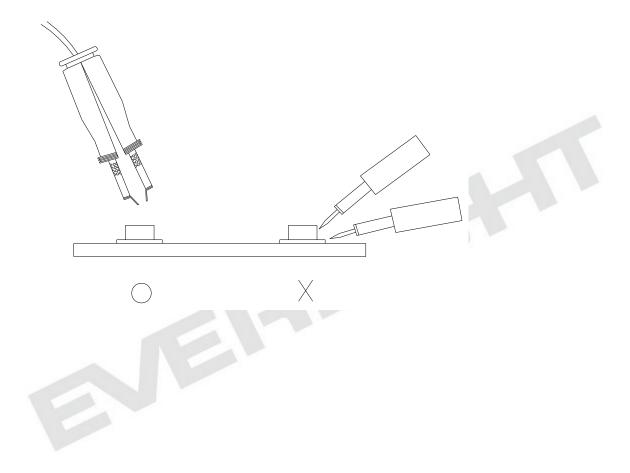

"ired Period: Forever

单击下面可查看定价,库存,交付和生命周期等信息

>>Everlight(亿光)