# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

## **Technical Data Sheet**

## **Chip LED with Right Angle Lens**

## **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow

solder process.

- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

#### **Descriptions**

- The 12-215 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

### **Applications**

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

### **Device Selection Guide**

	Ch		
Part No.	Material	<b>Emitted Color</b>	Lens Color
12-215/BHC-AN1P2/3C	InGaN	Blue	Water Clear

http://www.everlight.com Prepared date: 19-Aug-2005


Page: 1 of 10 Rev.1 Prepared by:Meng Yali



# 12-215/BHC-AN1P2/3C



### **Package Outline Dimensions**

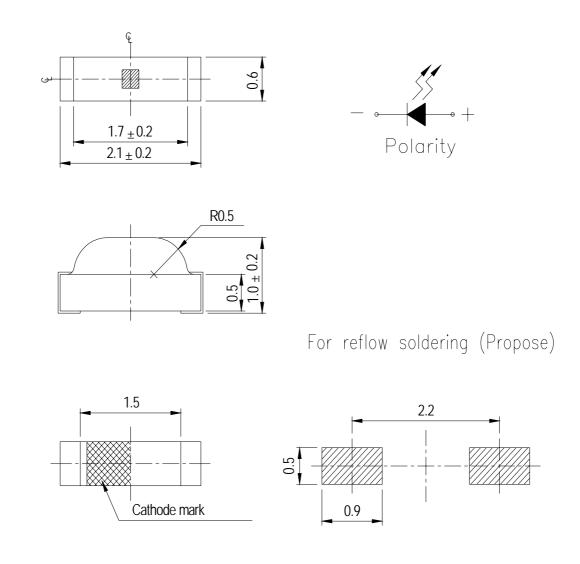

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

Everlight Electronics Co., Ltd. Device No. : SZDSE-125-B05 http://www.everlight.com Prepared date: 19-Aug-2005 Rev.1 Page: 2 of 10 Prepared by:Meng Yali EVERLIGHT ELECTRONICS CO.,LTD.

## 12-215/BHC-AN1P2/3C

Absolute Maximum Ratings (1a=25 C)					
Parameter	Symbol	Rating	Unit		
Reverse Voltage	VR	5	V		
Forward Current	IF	25	mA		
Operating Temperature	Topr	-40 ~ +85	°C		
Storage Temperature	Tstg	-40 ~ +90	°C		
Electrostatic Discharge	ESD	150	V		
Power Dissipation	Pd	110	mW		
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	100	mA		
Soldering Temperature	Tsol	Reflow Soldering : 260 $^{\circ}$ C for 10 sec. Hand Soldering : 350 $^{\circ}$ C for 3 sec.			

## Electro-Optical Characteristics (Ta=25°C)

Absolute Maximum Ratings (Ta=25°C)

EVERLIGHT

<b>A</b>	-						
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	28.5		72.0	mcd		
Peak Wavelength	λp		468		nm		
Dominant Wavelength	λd	464.5		476.5	nm	1 20 4	
Spectrum Radiation Bandwidth	$ riangle \lambda$		35		nm	IF=20mA	
Viewing Angle	2 <del>0</del> 1/2		130		deg		
Forward Voltage	VF	2.7	3.3	3.7	V		
Reverse Current	IR			50	$\mu A$	V <sub>R</sub> =5V	

#### Notes:

1.Tolerance of Luminous Intensity ±10%

#### 2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.10V

Everlight Electronics Co., Ltd. Device No. : SZDSE-125-B05 http://www.everlight.com Prepared date: 19-Aug-2005 Rev.1 Page: 3 of 10 Prepared by:Meng Yali EVERLIGHT ELECTRONICS CO., LTD.

## 12-215/BHC-AN1P2/3C

#### **Bin Range Of Dom. Wavelength**

ÆRLIGHT

Group	Bin	Min	Max	Unit	Condition
А	A9	464.5	467.5		IF=20mA
	A10	467.5	470.5	nm	
	A11	470.5	473.5		
	A12	473.5	476.5		

#### **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition	
N1	28.5	36.0	mcd		
N2	36.0	45.0		IF=20mA	
P1	45.0	57.0			
P2	57.0	72.0			

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm


3.Tolerance of Forward Voltage ±0.10V

http://www.everlight.com Prepared date: 19-Aug-2005 EVERLIGHT ELECTRONICS CO., LTD.

## 12-215/BHC-AN1P2/3C

### **Typical Electro-Optical Characteristics Curves**

ÆRLIGHT

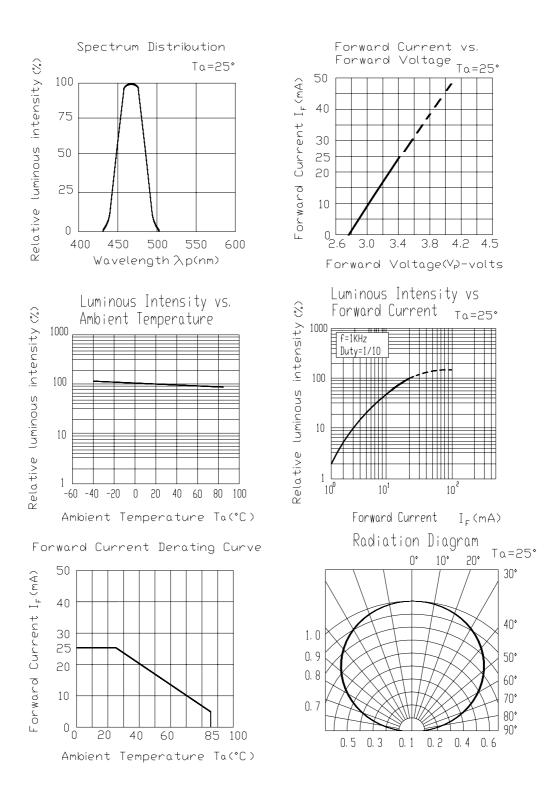

Everlight Electronics Co., Ltd. Device No. : SZDSE-125-B05 http://www.everlight.com Prepared date: 19-Aug-2005 Rev.1 Page: 5 of 10 Prepared by:Meng Yali

# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.


## 12-215/BHC-AN1P2/3C

#### Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**




#### **Reel Dimensions**

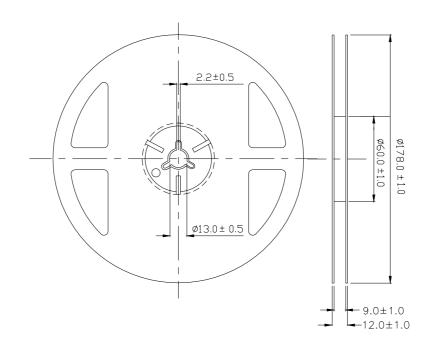

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm


Everlight Electronics Co., Ltd. Device No. : SZDSE-125-B05 http://www.everlight.com Prepared date: 19-Aug-2005 Rev.1 Page: 6 of 10 Prepared by:Meng Yali

## **Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel**

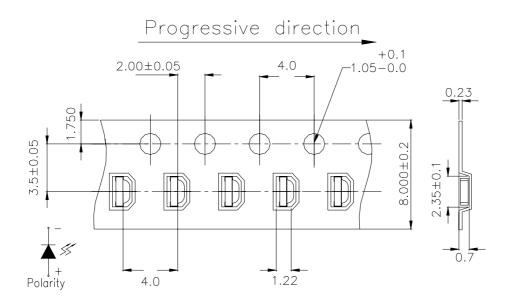

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

### **Moisture Resistant Packaging**

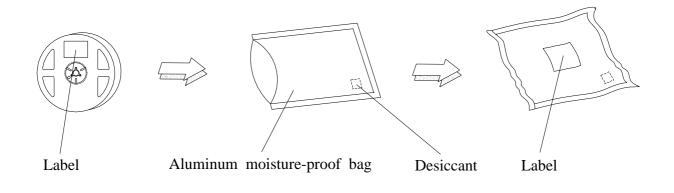

Everlight Electronics Co., Ltd. Device No. : SZDSE-125-B05 http://www.everlight.com Prepared date: 19-Aug-2005 Rev.1 Page: 7 of 10 Prepared by:Meng Yali

## **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	<b>Temp.</b> : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20  mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85%RH	1000 Hrs.	22 PCS.	0/1


http://www.everlight.com Prepared date: 19-Aug-2005 Rev.1 Page: 8 of 10 Prepared by:Meng Yali

#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 60%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
  Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

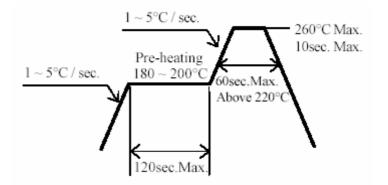

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.


Everlight Electronics Co., Ltd. Device No. : SZDSE-125-B05 http://www.everlight.com Prepared date: 19-Aug-2005 Rev.1 Page: 9 of 10 Prepared by:Meng Yali

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

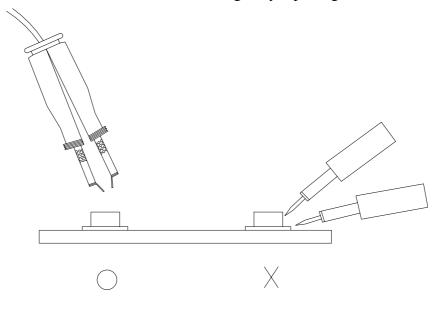

**EVERLIGHT ELECTRONICS CO., LTD.** Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com* 

Everlight Electronics Co., Ltd. Device No. : SZDSE-125-B05 http://www.everlight.com Prepared date: 19-Aug-2005 Rev.1 Page: 10 of 10 Prepared by:Meng Yali 单击下面可查看定价,库存,交付和生命周期等信息

>>Everlight(亿光)