EVERLIGHT

EVERLIGHT ELECTRONICS CO., LTD.

Technical Data Sheet(Preminary)

White SMD Surface Mount Device

Features

- Fluorescence Type
- High Luminous Intensity
- High Efficiency
- Emission Color:x=0.29,y=0.30
- Pb-free.
- RoHS refer to SMD C TYPE SGS report

Descriptions

The white LED which was fabricated using a blue LED and a phosphor, and the phosphor is excited by blue light and emits yellow fluorescence. The mixture of blue light and yellow light results in a white emission.

Applications

- OA Equipment
- Backlighting of Full Color LCD
- Automotive Equipment
- Replacement of Conventional Light Bulbs and Fluorescent Lamps

Device Selection Guide

Chip		Lens Color
Material	Material Emitted Color	
InGaN	White	Water Clear

67-11/W1C-ES1T2N/2T




Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:07-Jun.-2005 Rev. 1.0 Page: 1 of 12 Prepared by: Forrest Chen



<u>67-11/W1C-ES1T2N/2T</u>

Package Dimensions

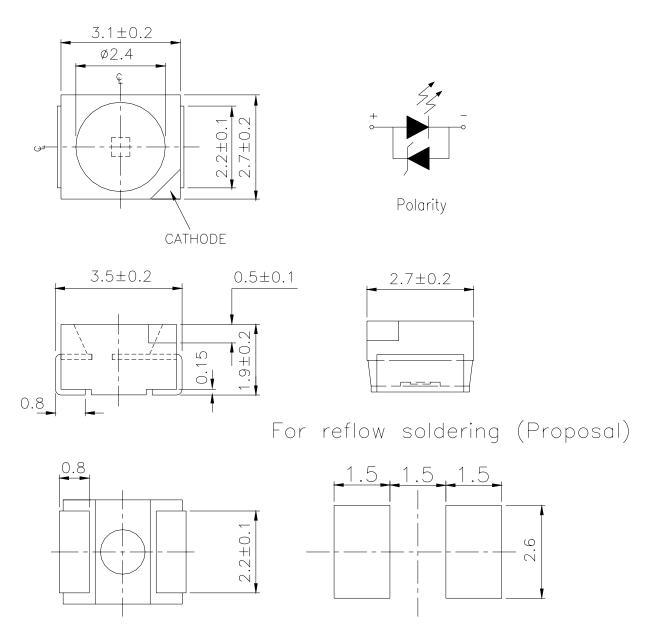

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:07-Jun.-2005 Rev. 1.0 Page: 2 of 12 Prepared by: Forrest Chen

Absolute Maximum Ratings (Ta=25°C)

Absolute Maximum Katings (1a-23	0)		
Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +90	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	110	mW
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	100	mA
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec Hand Soldering : 350 °C for 3 sec.	

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Units	Condition
Luminous Intensity	I_V	180		450	mcd	I _F =20mA
Viewing Angle	2 0 1/2		120		deg	I _F =20mA
Forward Voltage	V _F	2.70		3.50	V	I _F =20mA
Reverse Current	I _R			50	μA	V _R =5V

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:07-Jun.-2005 Rev. 1.0 Page: 3 of 12 Prepared by: Forrest Chen

Bin Range Of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
S 1	180	225		IF=20mA
S2	225	280	mcd	
T1	280	360		
T2	360	450		

Bin Range Of Forward Voltage

Group	Bin Code	Min.	Max.	Unit	Condition
	10	2.70	2.90		
	11	2.90	3.10		
Ν	12	3.10	3.30	V	IF=20mA
	13	3.30	3.50		
	14	3.50	3.70		

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:07-Jun.-2005 Rev. 1.0 Page: 4 of 12 Prepared by: Forrest Chen


Group	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
	-	0.280	0.248		0.311	0.294
		0.264	0.267	D	0.307	0.315
	A0	0.283	0.305	B6	0.330	0.339
		0.296	0.276		0.330	0.318
		0.287	0.295	B4	0.307	0.315
E	B3	0.283	0.305		0.304	0.33
		0.304	0.330		0.33	0.36
		0.307	0.315		0.33	0.339
	B5	0.296	0.276			
		0.287	0.295			
	DJ	0.307	0.315			
		0.311	0.294			

*The C.I.E. 1931 chromaticity diagram (Tolerance ± 0.01).

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:07-Jun.-2005 Rev. 1.0 Page: 5 of 12 Prepared by: Forrest Chen

<u>67-11/W1C-ES1T2N/2T</u>

CIE Chromaticity Diagram

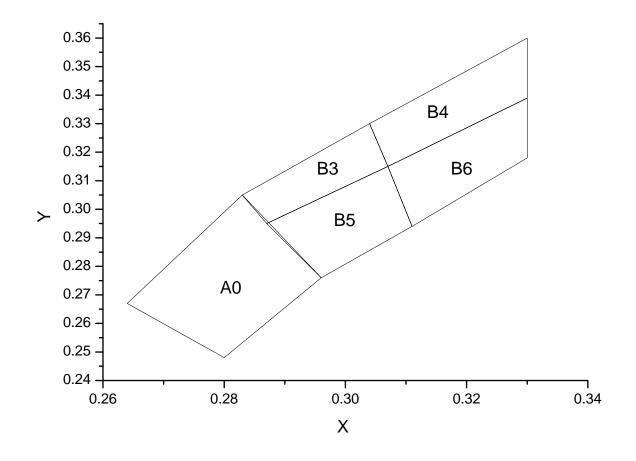


*The C.I.E. 1931 chromaticity diagram (Tolerance ± 0.01).

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:07-Jun.-2005 Rev. 1.0 Page: 6 of 12 Prepared by: Forrest Chen



<u>67-11/W1C-ES1T2N/2T</u>

Typical Electro-Optical Characteristics Curves

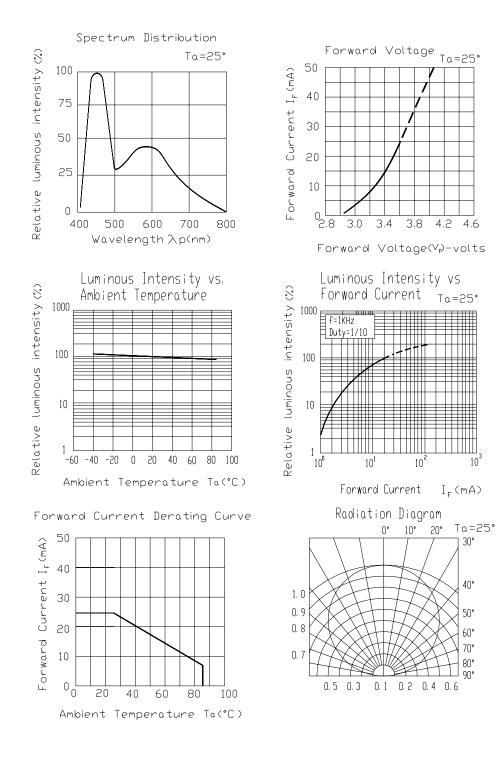

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:07-Jun.-2005 Rev. 1.0 Page: 7 of 12 Prepared by: Forrest Chen




EVERLIGHT ELECTRONICS CO., LTD.


67-11/W1C-ES1T2N/2T

Label explanation

- **CAT: Luminous Intensity Rank**
- **HUE: Chromaticity Coordinates**
- **REF: Forward Voltage Rank**

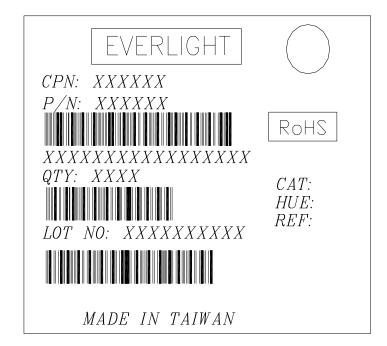

Reel Dimensions

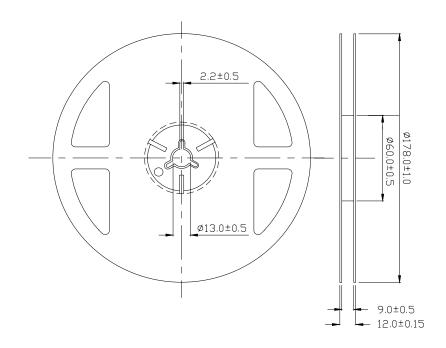


Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:07-Jun.-2005 Rev. 1.0 Page: 8 of 12 Prepared by: Forrest Chen




Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

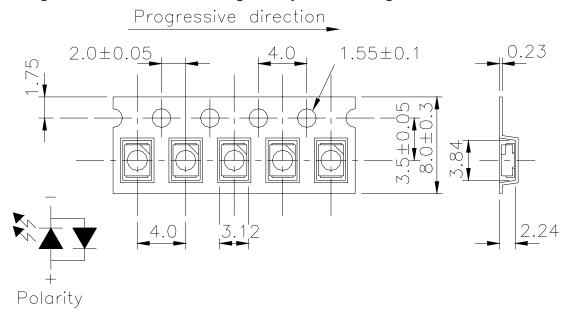

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Moisture Resistant Packaging

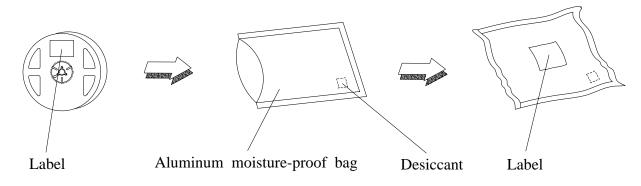

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:07-Jun.-2005 Rev. 1.0 Page: 9 of 12 Prepared by: Forrest Chen



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min $\int 5 \text{ min}$ L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100°C 5min \int 10 sec L : -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1


Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:07-Jun.-2005 Rev. 1.0 Page: 10 of 12 Prepared by: Forrest Chen

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90% RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
 Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

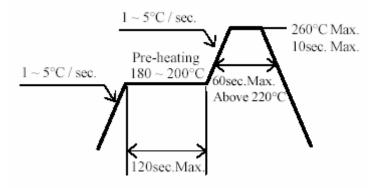

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4.Soldering Iron


Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd.	http://www.everlight.com	Rev. 1.0	Page: 11 of 12
Device No. :	Date:07-Jun2005	Prepared by: I	Forrest Chen



5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

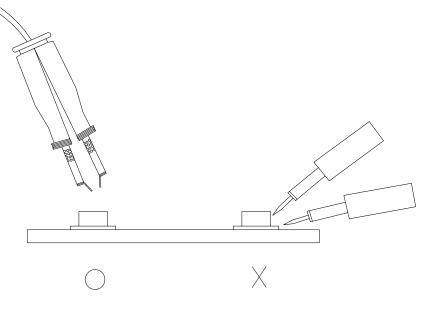

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No. : http://www.everlight.com Date:07-Jun.-2005 Rev. 1.0 Page: 12 of 12 Prepared by: Forrest Chen

Downloaded From Oneyac.com

单击下面可查看定价,库存,交付和生命周期等信息

>>Everlight(亿光)