

## DUAL OPERATIONAL AMPLIFIER


### DESCRIPTION

The RC4580 is the dual operational amplifier, specially designed for improving the tone control, which is most suitable for the audio application.


Featuring noiseless, higher gain bandwidth, high output current and low distortion ratio, and it is most suitable not only for acoustic electronic parts of audio pre-amp and active filter, but also for the industrial measurement tools. It is also suitable for the head phone amp at higher output current, and further more, it can be applied for the handy type set operational amplifier of general purpose in application of low voltage single supply type which is properly biased of the input low voltage source.

### FEATURES


- \*Operating Voltage  $(\pm 2V \text{ to } \pm 16V)$
- \*Low Input Noise Voltage  $(0.8 \mu V_{rms} \text{ typ.})$
- \*Wide Gain Bandwidth Product  $(15MHz \text{ typ.})$
- \*Low Distortion  $(0.0005\% \text{ typ.})$
- \*Slew Rate  $(5V/\mu s \text{ typ.})$
- \*Bipolar Technology

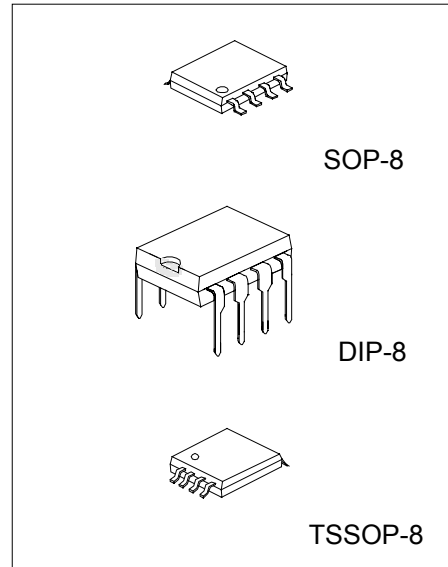

### PIN CONFIGURATION

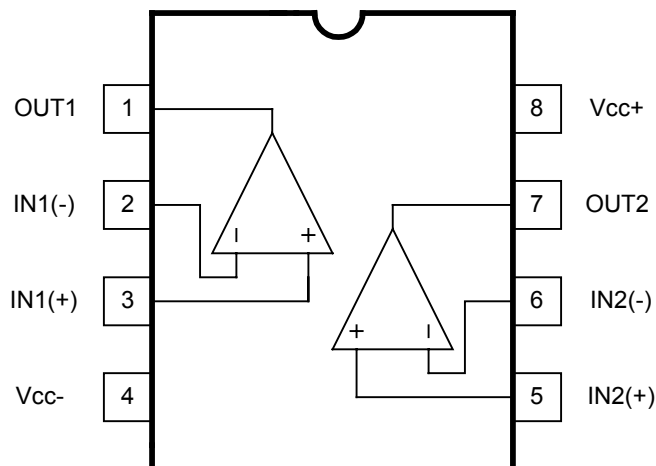

TEST CIRCUIT

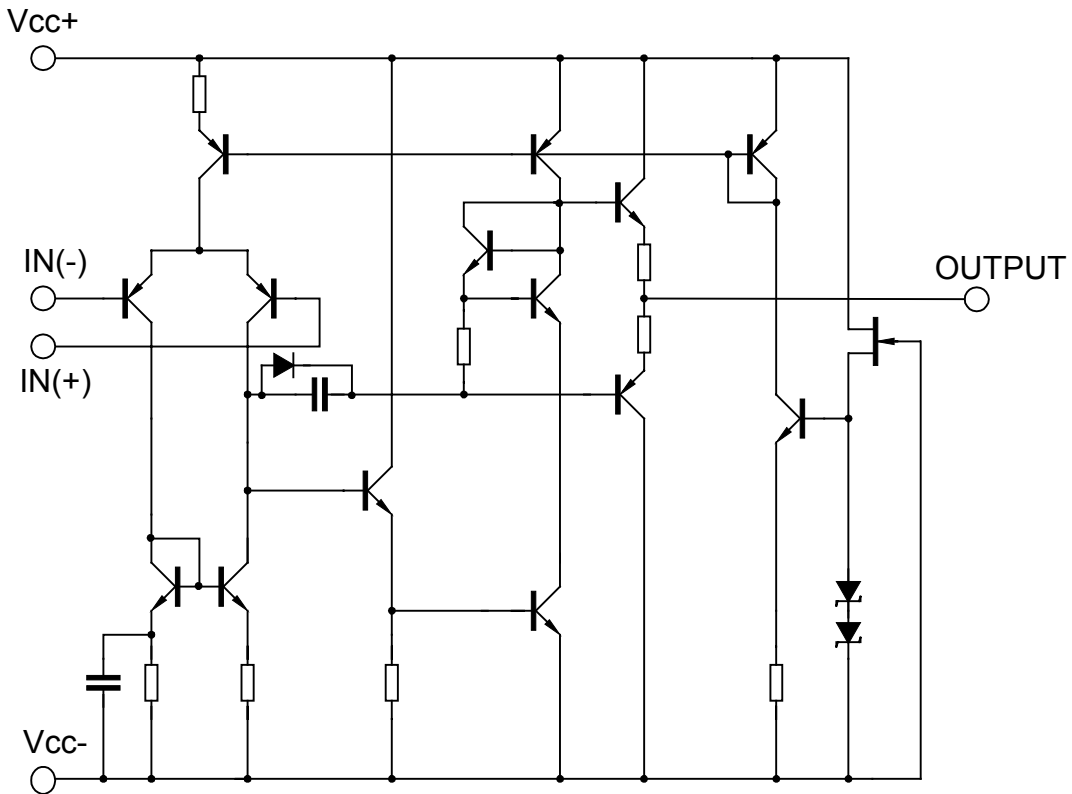

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)


PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V^+V^-$	$\pm 16$	V
Input Voltage	$V_{IC}$	$\pm 15$	V
Differential Input Voltage	$V_{ID}$	$\pm 30$	V
Output Current	$I_o$	$\pm 50$	mA
Power Dissipation	$P_d$	300 (SOP-8) 800 (DIP-8) 250(TSSOP-8)	mW
Operating Temperature Range	$T_{opr}$	-40 to +85	°C
Storage Temperature Range	$T_{stg}$	-40 to +125	°C

**ELECTRICAL CHARACTERISTICS** ( $V^+/V^- = \pm 15V$ ,  $T_a = 25^\circ C$ )


PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Input Offset Voltage	$V_{IO}$	$R_S \leq 10k\Omega$	-	0.5	3	mV
Input Offset Current	$I_{IO}$		-	5	200	nA
Input Bias Current	$I_B$		-	100	500	nA
Large Signal Voltage Gain	$A_V$	$V_o = \pm 10V$ , $R_L \geq 2k\Omega$	90	110	-	dB
Output Voltage Swing	$V_{OM}$	$R_L >= 2k\Omega$	$\pm 12$	$\pm 13.5$	-	V
Input Common Mode Voltage Range	$V_{ICM}$		$\pm 12$	$\pm 13.5$	-	V
Common Mode Rejection Ratio	CMR	$R_S \leq 10k\Omega$	80	110	-	dB
Supply Voltage Rejection Ratio	SVR	$R_S \leq 10k\Omega$	80	110	-	dB
Operating Current	$I_{CC}$		-	6	9	mA
Slew Rate	SR	$R_L \geq 2k\Omega$	-	5	-	V/ $\mu s$
Gain bandwidth Product	GB	$f = 10KHz$	-	15	-	MHz
Total Harmonic Distortion	THD	$A_v = 20dB$ , $V_o = 5V$ , $R_L = 2k\Omega$ , $f = 1KHz$	-	0.0005	-	%
Input Noise Voltage	$V_{NI}$	RIAA $R_s = 2.2 k\Omega$ , 30kHz LPF	-	0.8	-	$\mu V_{rms}$

**TYPICAL CHARACTERISTICS**


Maximum Output Voltage Swing vs. Load Resistance

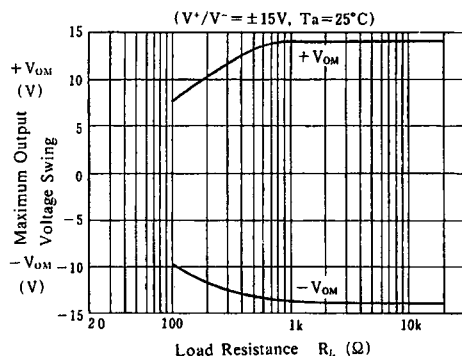


Maximum Output Voltage Swing vs. Frequency

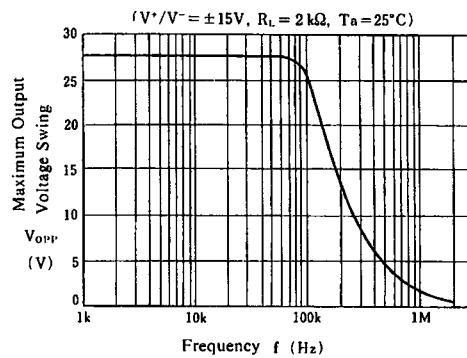


Output Voltage Swing vs. Output Current

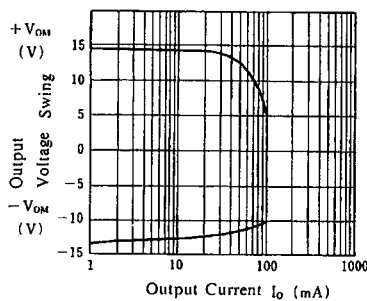


Equivalent Input Noise Voltage vs. Frequency

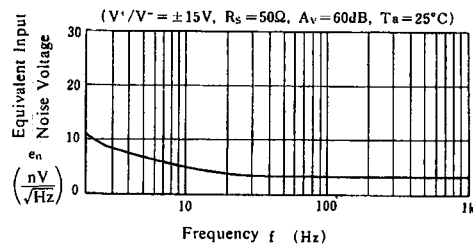


Operating Current vs. Temperature

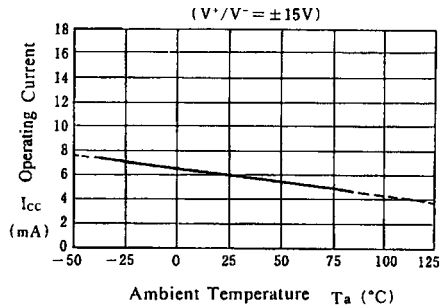


Output Voltage Swing vs. Temperature

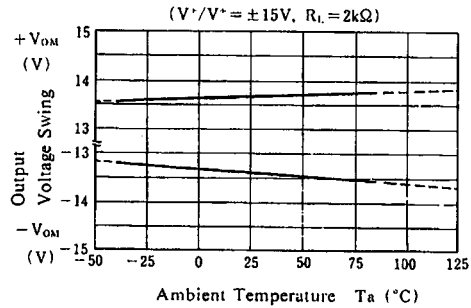


Input Offset Voltage vs. Temperature

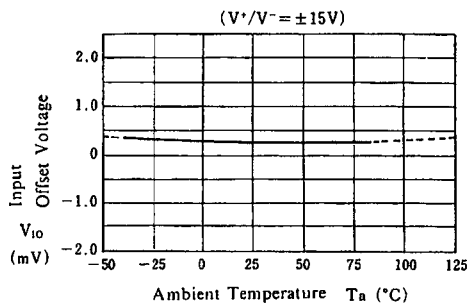


Input Bias Current vs. Temperature

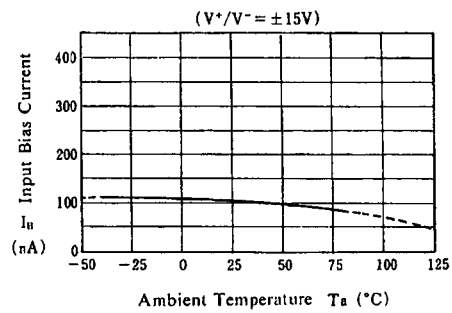


Maximum Output Voltage Swing vs. Operating Voltage

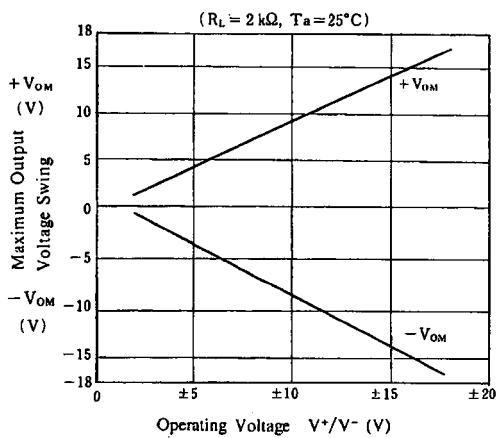


Operating Current vs. Operating Voltage

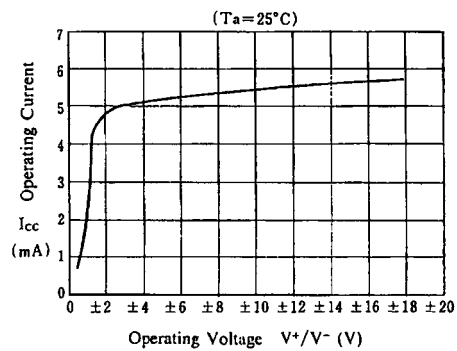

Total Harmonic Distortion vs. Output Voltage

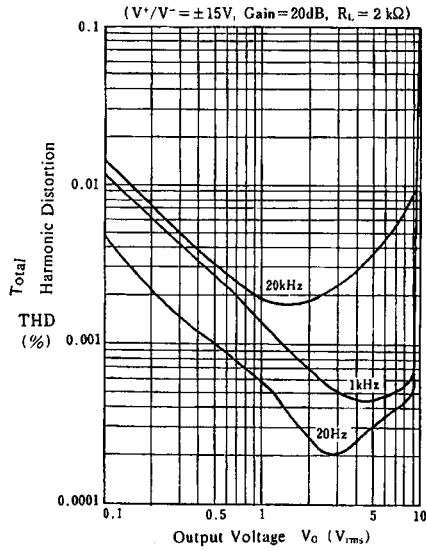

Voltage Gain, Phase vs. Frequency

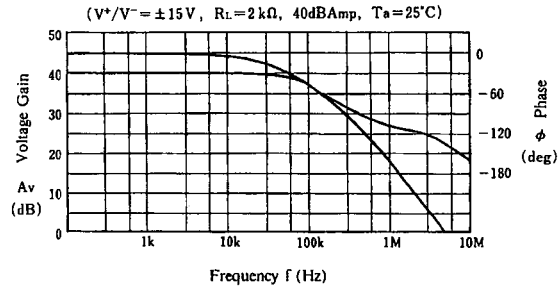

### Important statement:

Huaguan Semiconductor Co,Ltd. reserves the right to change the products and services provided without notice. Customers should obtain the latest relevant information before ordering, and verify the timeliness and accuracy of this information.

Customers are responsible for complying with safety standards and taking safety measures when using our products for system design and machine manufacturing to avoid potential risks that may result in personal injury or property damage.

Our products are not licensed for applications in life support, military, aerospace, etc., so we do not bear the consequences of the application of these products in these fields.

Our documentation is only permitted to be copied without any tampering with the content, so we do not accept any responsibility or liability for the altered documents.

单击下面可查看定价，库存，交付和生命周期等信息

[>>HGSEMI\(华冠\)](#)