
General Description

The LM2576S is a series of easy to use fixed and adjustable step-down (buck) switch-mode voltage regulators. These devices are available in fixed output voltage of 3.3V, 5V, and an adjustable output version. Both versions are capable of driving a 3.5A load with excellent line and load regulation.

Requiring a minimum number of external components, these regulators are simple to use and include internal frequency compensation, and a fixed-frequency oscillator.

The output voltage is guaranteed to ±3% tolerance under specified input voltage and output load conditions. The oscillator frequency is guaranteed to ±15%. External shutdown is included, featuring typically 80 μA standby current. Self protection features include a two stage frequency reducing current limit for the output switch and an over temperature shutdown for complete protection under fault conditions.

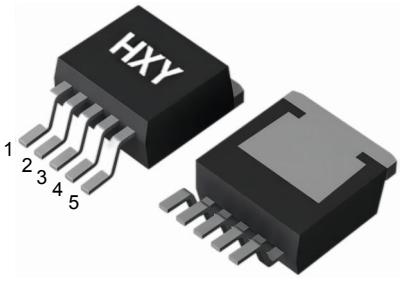

5 ON/OFF
4 Feedback
3 Gnd
2 Output
1 Vin

TO263-5L

Features

- 3,3V,5V and adjustable output versions
- Output adjustable from 1.23v to 37V
- Fixed 52KHz frequency internal oscillator
- Guaranteed 3.5A output load current
- Input voltage range up to 40V
- Low power standby mode, I_Q typically 80 μA
- TTL shutdown capability
- Excellent line and load regulation
- Requires only 4 external components
- High efficiency
- Thermal shutdown and current limit protection

Name	Description
Vin	Input supply voltage
Output	Switching output
Gnd	Ground
Feedback	Output voltage feedback
ON/OFF	ON/OFF shutdown Active is “Low” or floating


Pin Descriptions

Applications

- Simple High-efficiency step-down regulator
- On-card switching regulators
- Positive to negative converter
- LCD monitor and LCD TV
- DVD recorder and PDP TV
- Battery charger
- Step-down to 3.3V for microprocessors


Downloaded From Oneyac.com

Functional Block Diagram

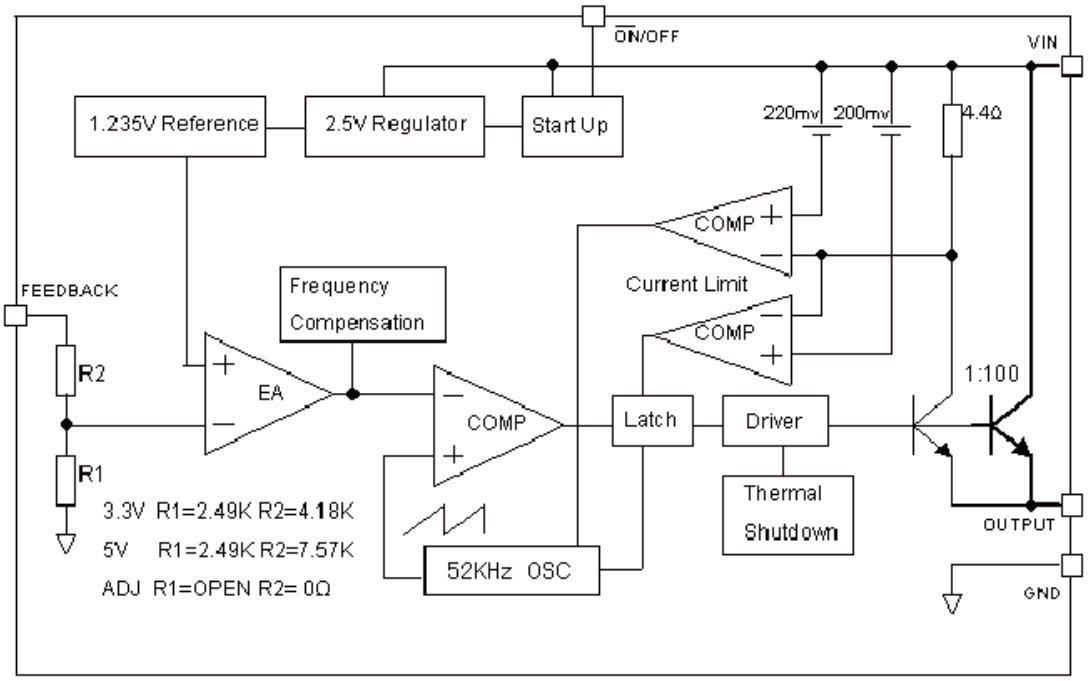

Functional Block Diagram of LM2576S

Typical Application (Fixed Output Voltage Versions)

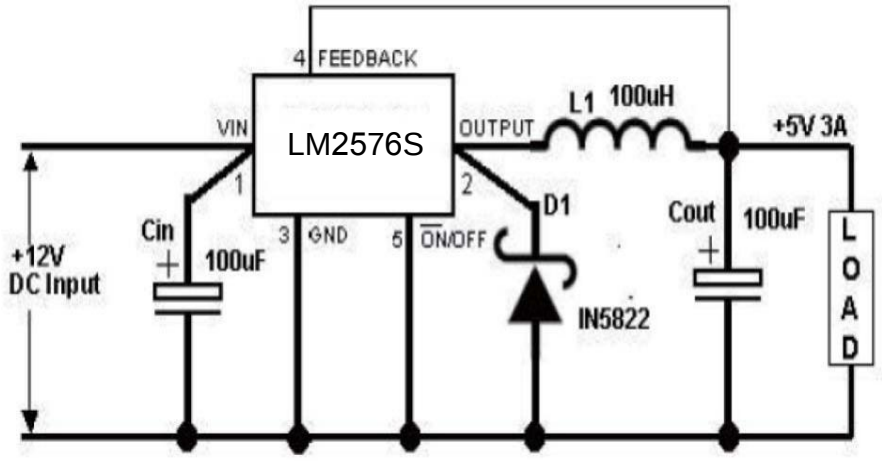

Typical Application of LM2576S

Downloaded From Oneyac.com

Absolute Maximum Ratings

Note1: Stresses greater than those listed under Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Parameter	Value	Unit
Supply Voltage Vin	-0.3 to 40	V
Feedback VFB pin voltage	-0.3 to Vin+0.3	V
ON/OFF Pin voltage	-0.3 to Vin+0.3	V
Output pin voltage	-0.3 to Vin+0.3	V
Output Voltage to Ground (Steady State)	-1	V
Power Dissipation	Internally limited	W
Operating Temperature Range	-40 to +125	°C
Storage Temperature	-65 to +150	°C
Lead Temperature (Soldering, 10 sec)	260	°C
ESD(HM)	2000	V
Thermal Resistance-Junction to Ambient(RθJA)	85	ºC / W
Thermal Resistance-Junction to Case(RθJC)	45	ºC / W

Electrical Characteristics (All Output Voltage Versions)

Unless otherwise specified, Ta = 25℃.

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_b	Feedback bias current	Adjustable only, V_{FB}=1.3V		10	50	nA
I_Q	Quiescent current	V_{FB}=12V force driver off		5	10	mA
I_{STBY}	Standby quiescent current	ON/OFF=5V, V_{IN}=36V		80	200	uA
F_{OSC}	Oscillator frequency		47	52	58	KHz
V_{SAT}	Saturation voltage	I_{OUT}=3.5A		1.2	1.4	V
I_{CL}	Current Limit	Peak Current (V_{FB}=0V)		4.5	5.5	A
I_L	Output leakage current	Output=0V (V_{FB}=12V)			50	uA
I_L	Output leakage current	Output=-1V (V_{IN}=36V)		2	30	mA
V_{IL}	ON/OFF pin logic input	Low (Regulator ON)		1.3	1.6	V

Downloaded From Oneyac.com

V_{IH}	Threshold voltage	High (Regulator OFF)	2.0	1.3		V
I_H I_L	ON/OFF pin input current	V_{LOGIC}=2.5V(Regulator OFF)		5	15	uA
		V_{LOGIC}=0.5V(Regulator ON)		0.02	5	uA
θ_{JC}	Thermal Resistance Junction to Case			3.5		^{O}C/W
θ_{JA}	Thermal Resistance Junction to Ambient (Note1)			23		^{O}C/W
LM2576 S-ADJ	Vout: Output Voltage	11V $\leqslant V_{IN} \leqslant$ 40V, 0.2A $\leqslant I_{LOAD} \leqslant$3.5A, V_{OUT} for 9V	1.193	1.23	1.267	V
	η: Efficiency	V_{IN}=12V,V_{OUT}=9V,I_{LOAD}=3.5A		88		%
LM2576 S-3.3V	Vout: Output Voltage	4.75V $\leqslant V_{IN} \leqslant$ 40V, 0.2A $\leqslant I_{LOAD} \leqslant$3.5A	3.168	3.3	3.432	V
	η: Efficiency	V_{IN}=12V, I_{LOAD}=3.5A		76		%
LM2576 S-5V	Vout: Output Voltage	7V$\leqslant V_{IN} \leqslant$40V, 0.2A$\leqslant I_{LOAD} \leqslant$3.5A	4.800	5.0	5.200	V
	η: Efficiency	V_{IN}=12V, I_{LOAD}=3.5A		83		%

Specifications with **boldface type** are for full operationg temperature range, the other type are for T_J=25^{O}C.

Note1: Thermal resistance with copper area of approximately 3 in^2.

Downloaded From Oneyac.com

Typical Performance Characteristics

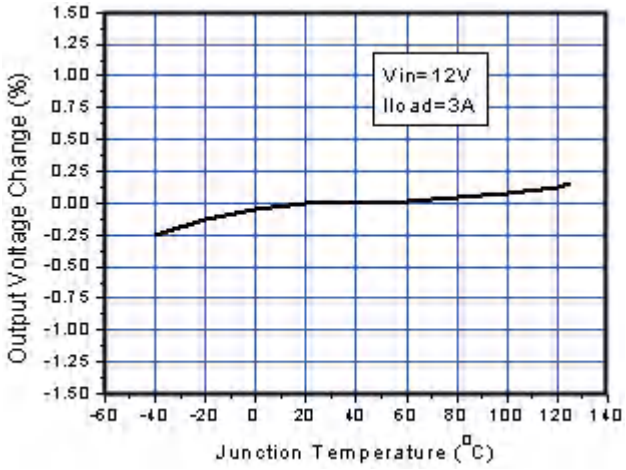


Figure 1. Output Voltage vs. Temperature

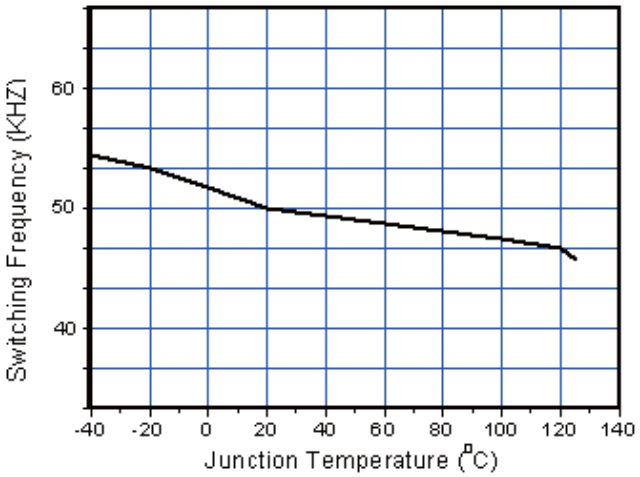


Figure 2. Switching Frequency vs. Temperature

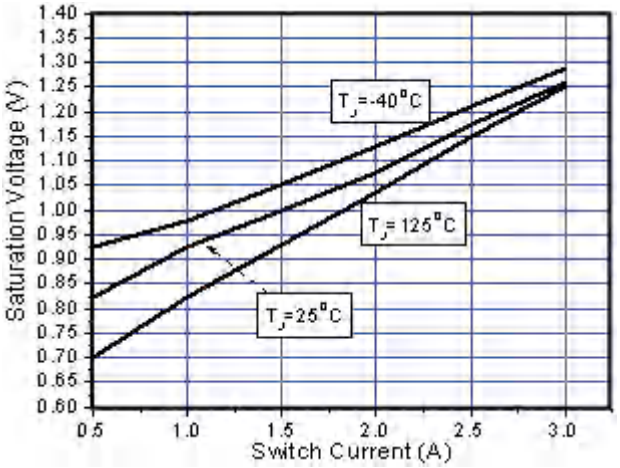


Figure 3. Output Saturation Characteristics

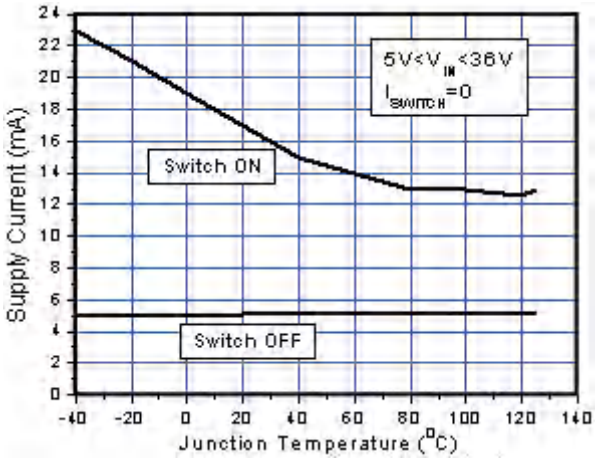


Figure 4. Quiescent Current vs. Temperature

Downloaded From Oneyac.com

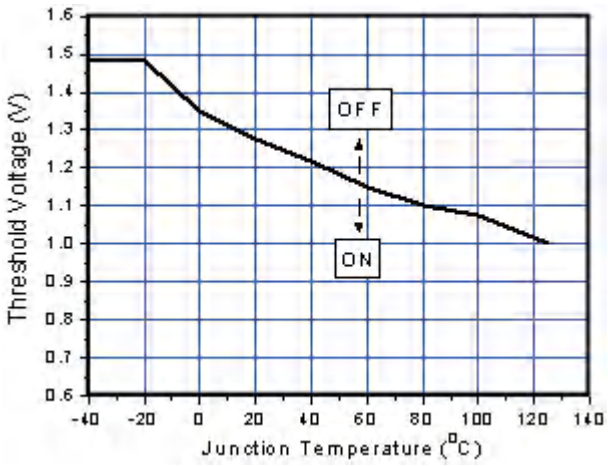


Figure 5. ON/OFF Pin Voltage

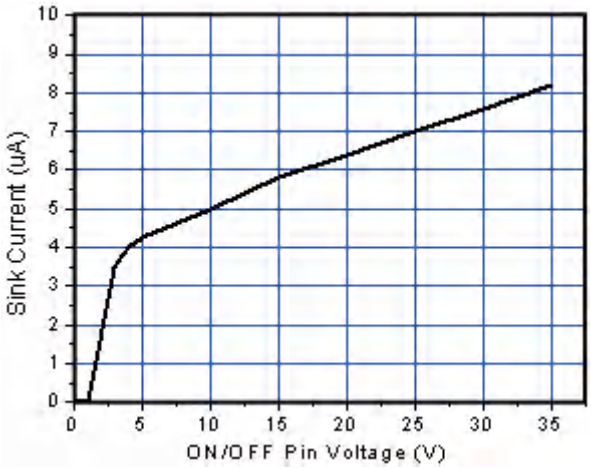


Figure 6. ON/OFF Pin Sink Current

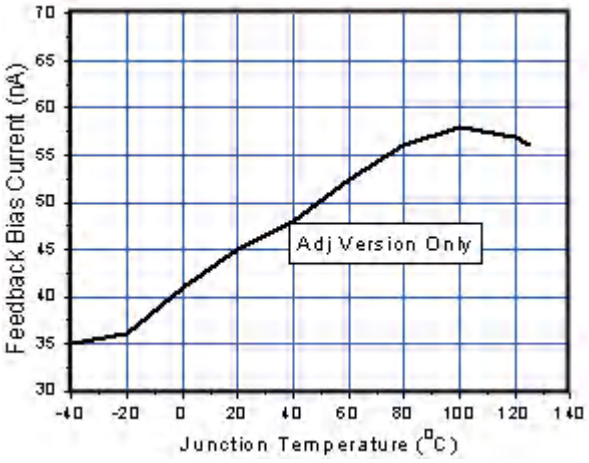


Figure 7. Output Saturation Characteristics

Downloaded From Oneyac.com

Typical Application Circuit

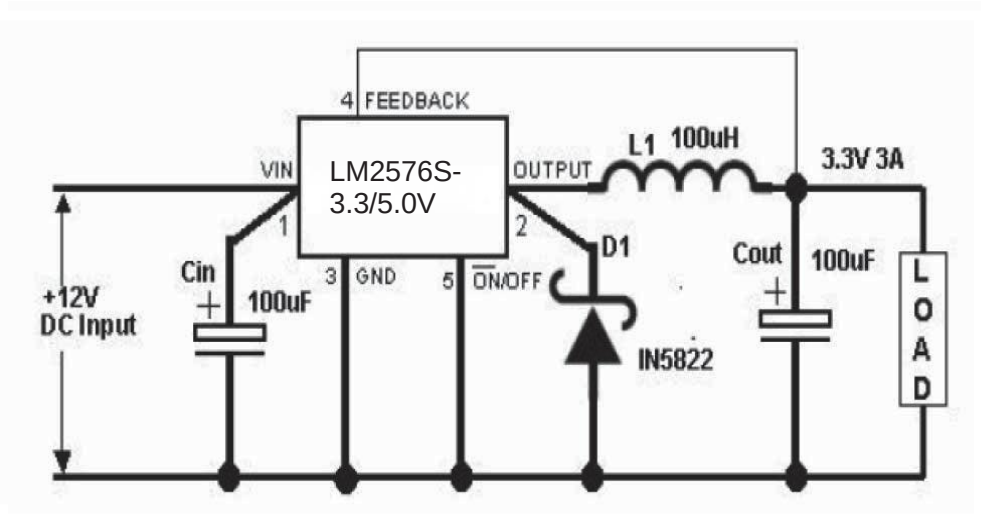


Figure 8. Typical Application of LM2576S For 3.3V,5.0V



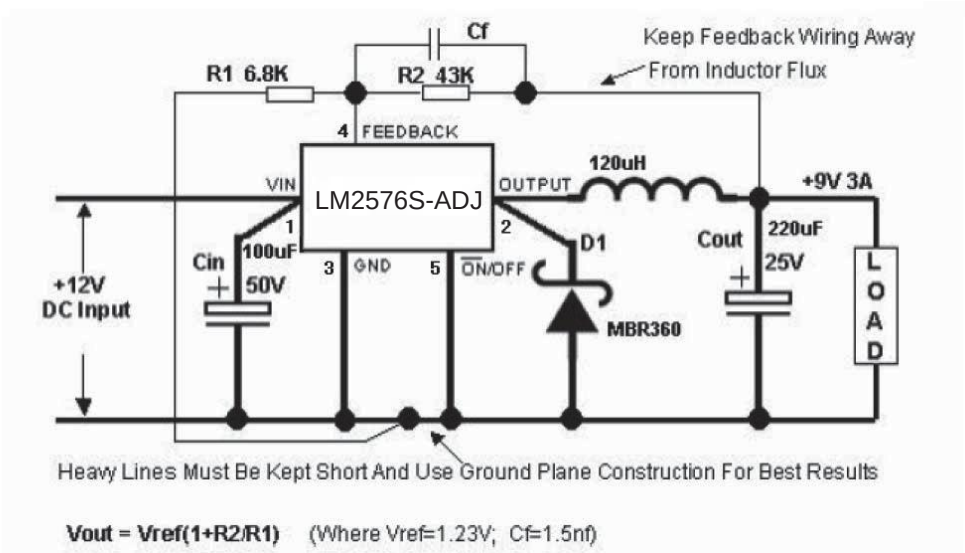


Figure 9. Typical Application of LM2576S For ADJ

Downloaded From Oneyac.com

Package Information (TO263-5L)

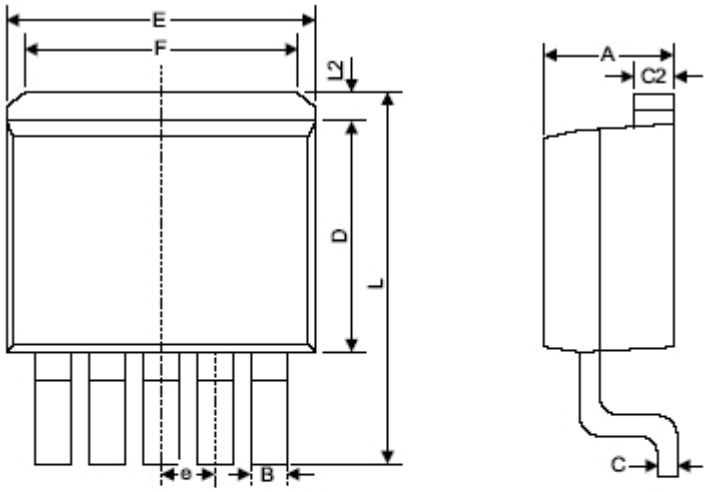



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.06	4.83	0.160	0.190
B	0.76	1.02	0.030	0.040
C	0.36	0.64	0.014	0.025
C2	1.14	1.40	0.045	0.055
D	8.64	9.65	0.340	0.380
E	9.78	10.54	0.385	0.415
e	1.57	1.85	0.062	0.073
F	6.60	7.11	0.260	0.280
L	15.11	15.37	0.595	0.605
L2	-	1.40	-	0.055

Downloaded From Oneyac.com

Attention

■ Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.

■ HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.

■ Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could
give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.

■ Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.

Downloaded From Oneyac.com

单击下面可查看定价，库存，交付和生命周期等信息

>>HXY MOSFET(华轩阳电子)

Downloaded From Oneyac.com