

# **Common mode Noise Filters**

Type: **EXC14CG EXC14CE** 




#### **Features**

- Small and thin (L 0.85 mm×W 0.65 mm×H 0.45 mm)
- Noise suppression of high-speed differential transmission lines with little influence of waveform rounding on signal transmission
- Low DC resistance and low insertion loss
- High-Q value and high impedance of GHz zone : EXC14CG type
- Strong multilayer/sintered structure, excellent reflow resistance and high mounting reliability
- Lead, halogen and antimony-free
- RoHS compliant


#### **Recommended Applications**

- Smartphones, Tablet PCs and DSC
- Noise suppression of high-speed differential data lines such as USB, LVDS and MHL


#### **Explanation of Part Numbers**

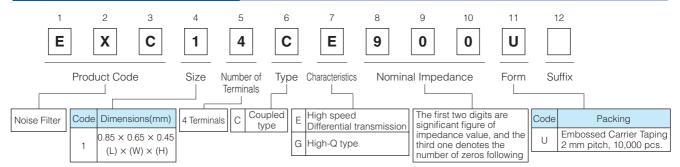


#### Construction

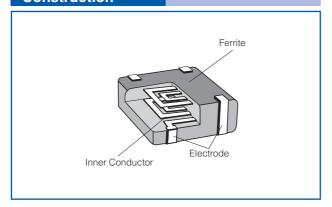



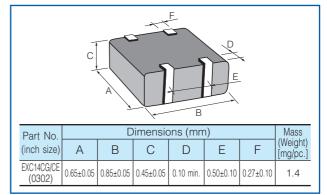

#### **Circuit Configuration(No Polarity)**

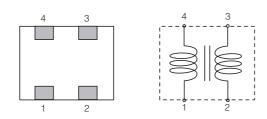

 The pin numbers shown here are for reference purposes only. Confirm the actual pin number arrangement with the exchanged specification documents.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.

Should a safety concern arise regarding this product, please be sure to contact us immediately.

Output

Design and specifications before purchase and/or use.

Should a safety concern arise regarding this product, please be sure to contact us immediately.

Jun. 2015


# **Common mode Noise Filters**

#### Ratings


Part Number	Impedance (Ω) at 100 MHz		Rated Voltage	Rated Current	DC Resistance
	Common Mode	Differential Mode	(V DC)	(mA DC)	(Ω)max.
EXC14CG120U	12 Ω±30 %	10 $\Omega$ max.	5	130	2.0
EXC14CG350U	35 Ω±30 %	15 $\Omega$ max.	5	100	2.0
EXC14CG430U	43 Ω±25 %	15 $\Omega$ max.	5	100	2.7
EXC14CE650U	65 Ω±20 %	20 $\Omega$ max.	5	130	2.5
EXC14CE900U	90 Ω±20 %	20 $\Omega$ max.	5	130	2.5
EXC14CE121U	120 Ω±20 %	20 $\Omega$ max.	5	100	3.8

<sup>●</sup> Category Temperature Range -40 °C to +85 °C

## **Impedance Characteristics (Typical)**

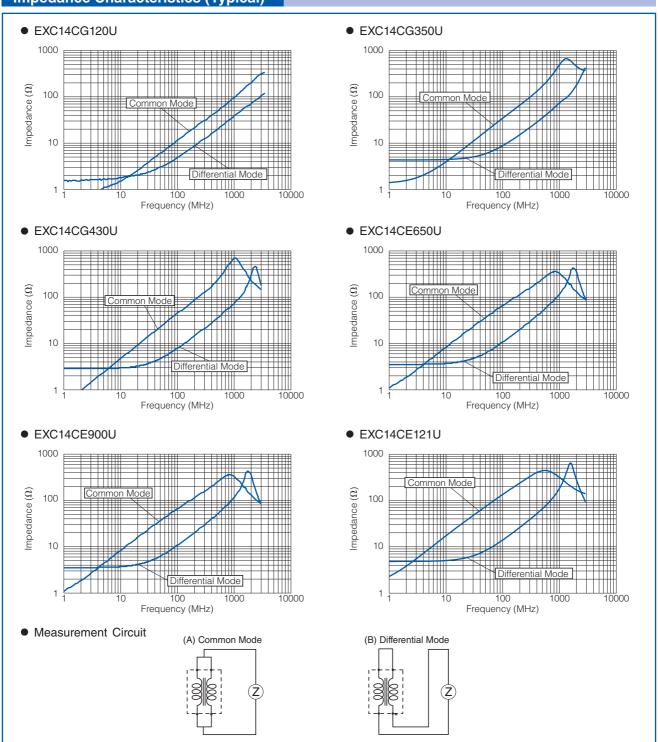

### **Attenuation Characteristics (Typical)**

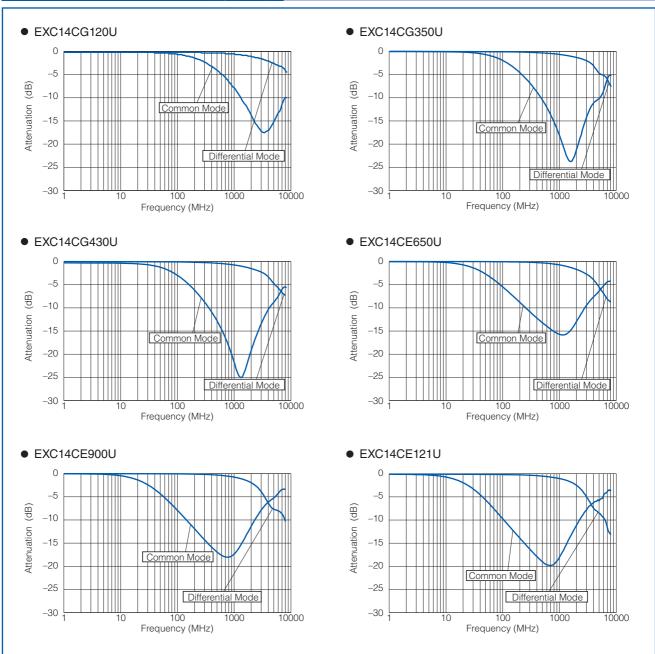

■ As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions, Please see Data Files

单击下面可查看定价,库存,交付和生命周期等信息

>>Panasonic(松下)