



Thermally-Enhanced High Power RF LDMOS FET 180 W, 28 V, 1805 – 1880 MHz

Description

The PTAB182002TC is a 180-watt LDMOS FET intended for use in multi-standard cellular power amplifier applications in the 1805 to 1880 MHz frequency band. Features include input and output matching, high gain and a thermally-enhanced package with ear-less copper flange. Manufactured with Infineon's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.



PTAB182002TC
Package H-49248H-4
(formed leads)

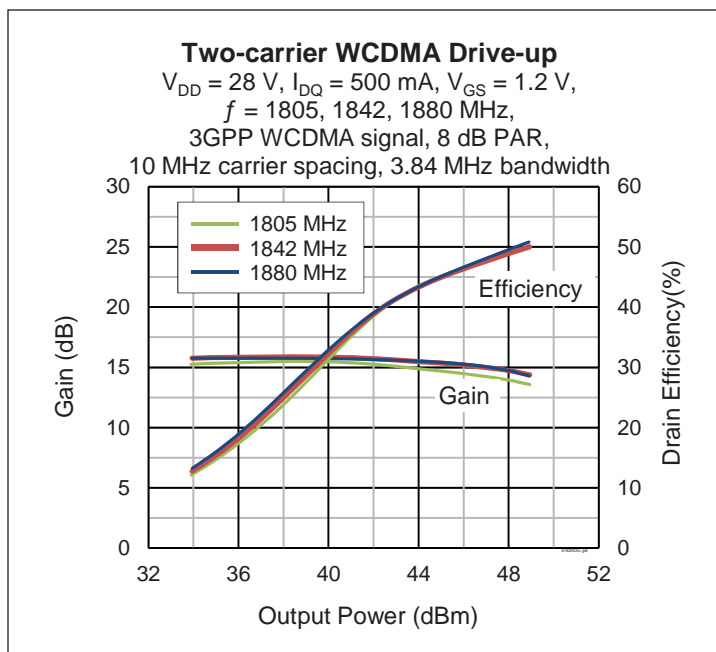

Features

- Asymmetric Doherty design
 - Main: $P_{1dB} = 70\text{ W Typ}$
 - Peak: $P_{1dB} = 120\text{ W Typ}$
- Broadband internal matching
- Integrated ESD protection
- Capable of handling 3:1 VSWR @ 30 V, 50 W (average) output power (one-carrier WCDMA signal, 10 dB PAR, Doherty test fixture)
- Copper flange for enhanced thermal performance
- Pb-free and RoHS-compliant

RF Characteristics

Two-carrier Specifications (device with flat leads tested in an Infineon Doherty production test fixture)

$V_{DD} = 28\text{ V}$, $V_{GSPK} = (V_{GS} \text{ at } I_{DQ} = 900\text{ mA}) - 1.90\text{ V}$, $I_{DQ} = 520\text{ mA}$, $P_{OUT} = 29\text{ W avg.}$, $f_1 = 1870\text{ MHz}$, $f_2 = 1880\text{ MHz}$. 3GPP WCDMA signal: 3.84 MHz bandwidth, 7.5 dB PAR @ 0.01% CCDF.

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	14.0	14.8	—	dB
Drain Efficiency	η_D	44	47	—	%
Intermodulation Distortion	IMD	—	-27.6	-24.0	dBc

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

DC Characteristics

Characteristic (each side)	Conditions	Symbol	Min	Typ	Max	Unit
Drain-source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current	$V_{DS} = 28\text{ V}, V_{GS} = 0\text{ V}$	I_{DSS}	—	—	1.0	μA
	$V_{DS} = 63\text{ V}, V_{GS} = 0\text{ V}$	I_{DSS}	—	—	10.0	μA
Gate Leakage Current	$V_{GS} = 12\text{ V}, V_{DS} = 0\text{ V}$	I_{GSS}	—	—	1.0	μA
On-state Resistance (main)	$V_{GS} = 10\text{ V}, V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.15	—	Ω
On-state Resistance (peak)	$V_{GS} = 10\text{ V}, V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.09	—	Ω
Operating Gate Voltage (main)	$V_{DS} = 28\text{ V}, I_{DQ} = 520\text{ mA}$	V_{GS}	2.5	3.0	3.5	V
Operating Gate Voltage (peak)	$V_{DS} = 28\text{ V}, I_{DQ} = 0\text{ mA}$	V_{GS}	0.7	1.1	1.5	V


Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source Voltage	V_{DSS}	65	V
Gate-source Voltage	V_{GS}	-6 to +10	V
Junction Temperature	T_J	200	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-40 to +150	$^{\circ}\text{C}$
Thermal Resistance ($T_{CASE} = 70^{\circ}\text{C}, 170\text{ W CW}$)	R_{qJC}	0.34	$^{\circ}\text{C/W}$

Ordering Information





Type and Version	Order Code	Package and Description	Shipping
PTAB182002TC V2 R250	PTAB182002TCV2R250XTMA1	H-49248H-4, ceramic open-cavity, formed leads, earless	Tape & Reel, 250 pcs

Pinout Diagram (top view)




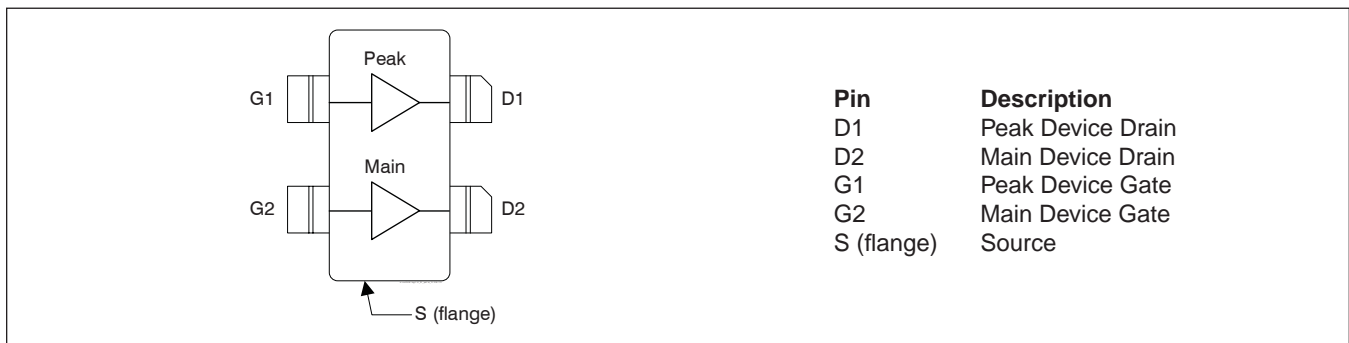


Lead connections for PTAB182002TC


Typical Performance (data taken in a production Doherty test fixture)

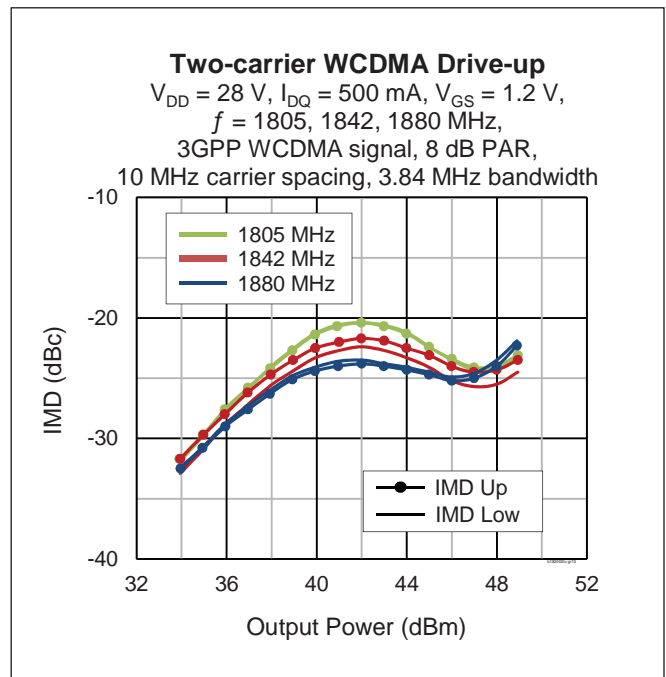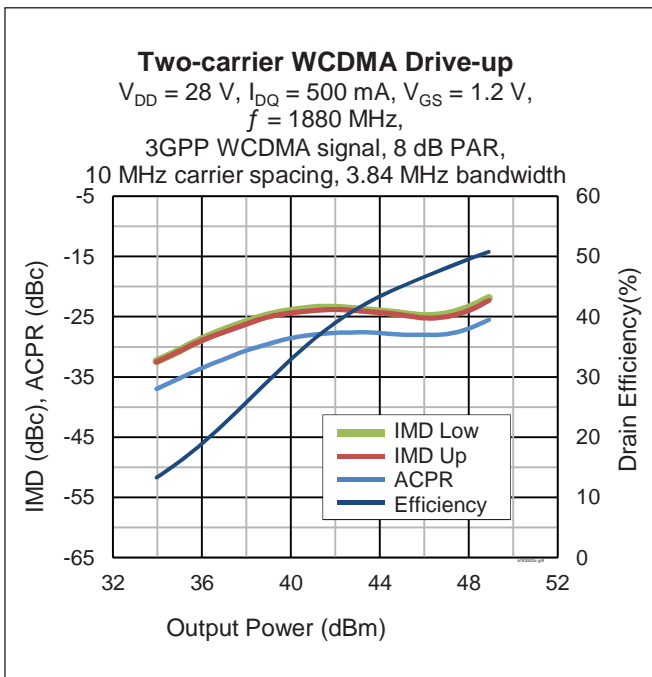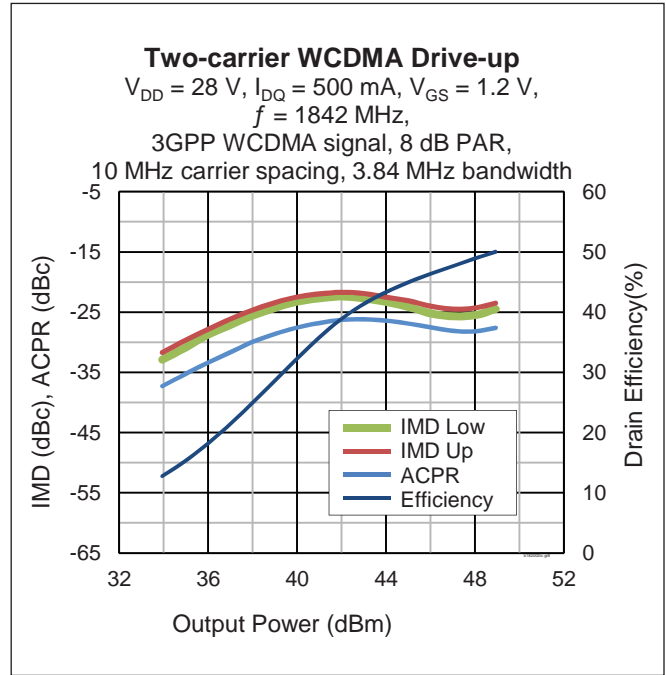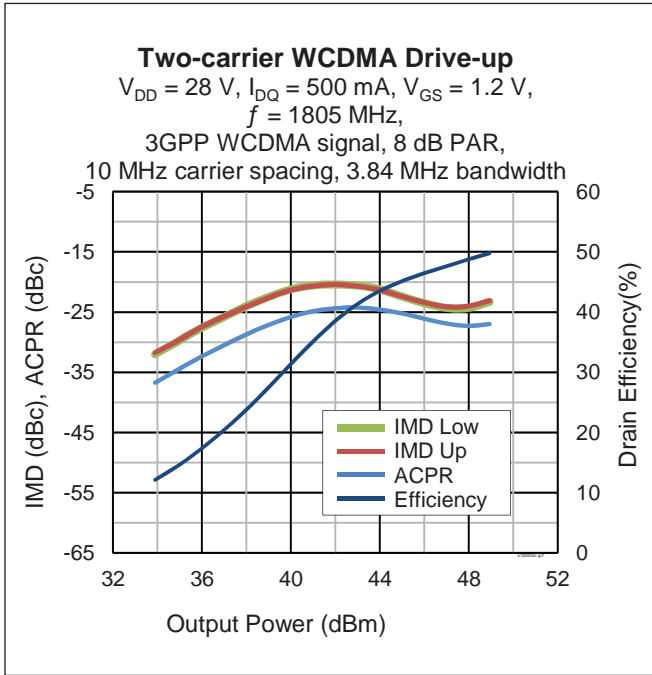


Typical Performance (cont.)

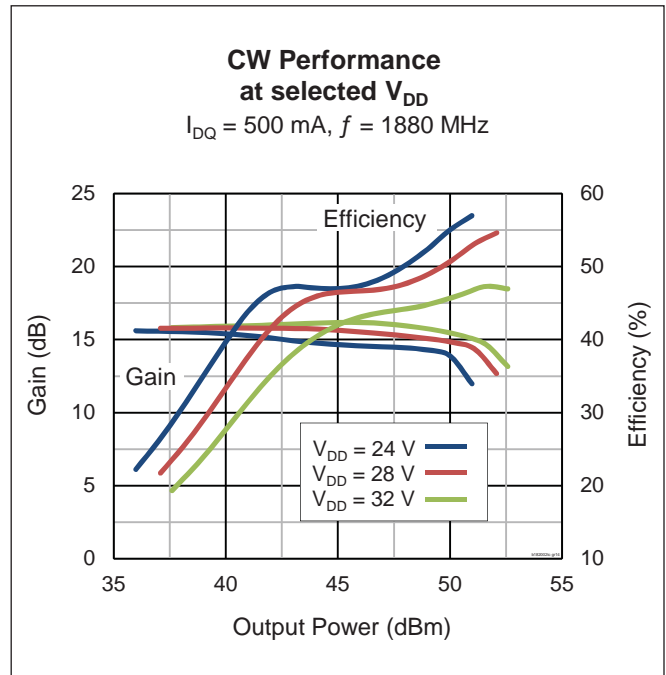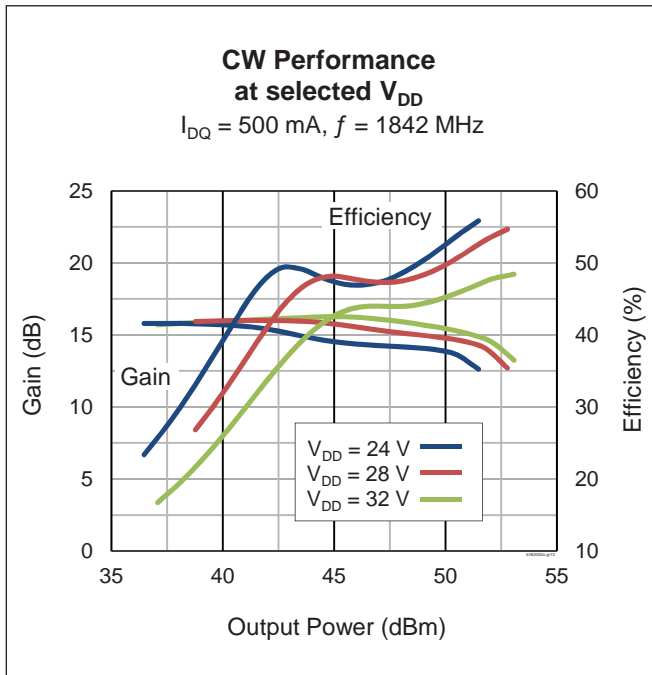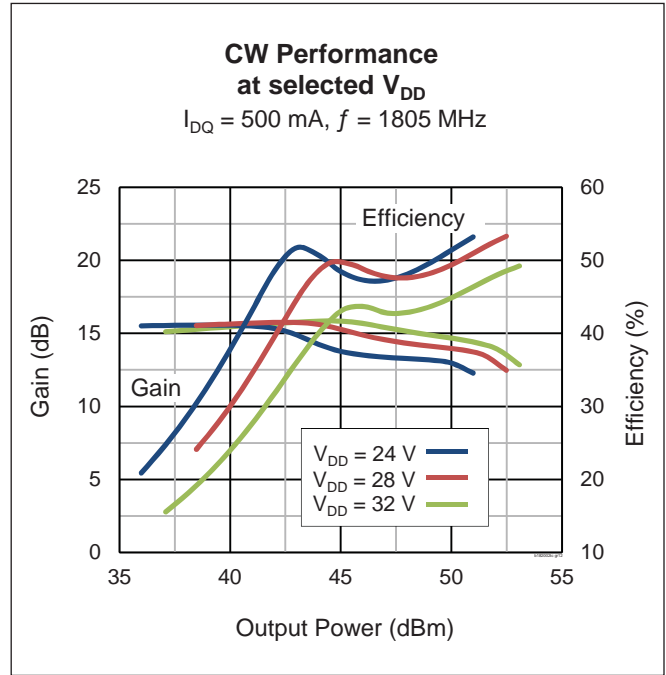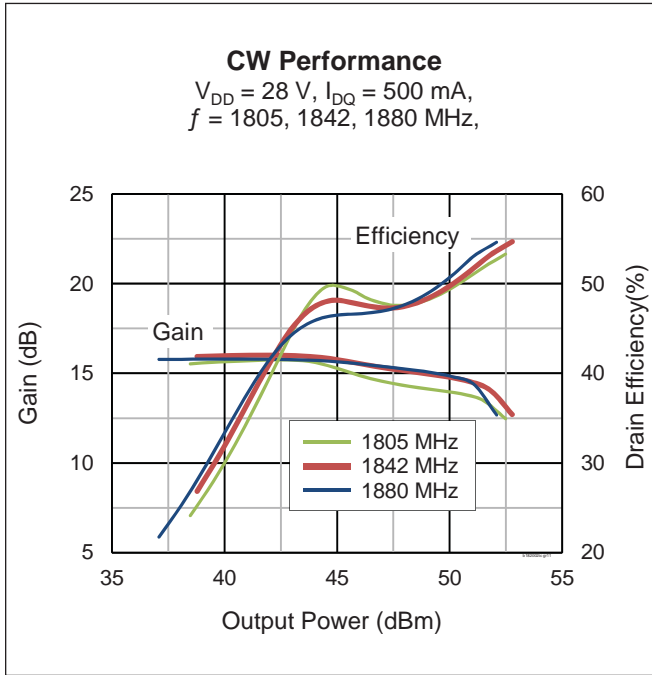

Typical Performance (cont.)

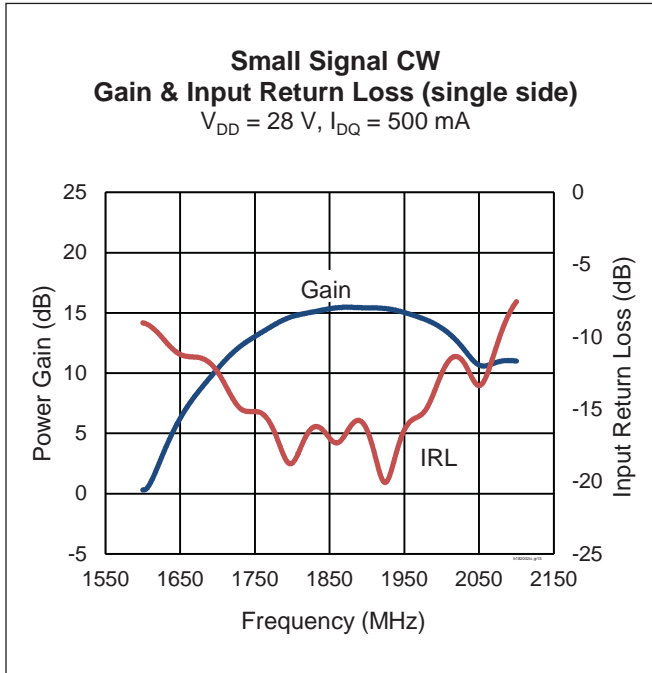

Load Pull Performance



Main Side Load Pull Performance – Pulsed CW signal: 16 μ sec, 10% duty cycle; 28 V, 530 mA

Freq [MHz]	Z Source [Ω]	Z Load [Ω]	P _{1dB}				P _{1dB}				
			Gain [dB]	P _{OUT} [dBm]	P _{OUT} [W]	PAE [%]	Z Load [Ω]	Gain [dB]	P _{OUT} [dBm]	P _{OUT} [W]	PAE [%]
1805	5.6 – j6.1	2.3 – j9.4	16.4	49.89	97	54.4	6.6 – j9.5	18.9	48.16	65	65.0
1842	12.4 – j12.7	2.1 – j9.4	15.9	50.03	101	53.6	5.4 – j8.6	18.7	48.21	66	66.0
1880	15.1 – j14.5	2.1 – j9.8	16.2	50.06	101	54.7	5.0 – j9.0	18.8	48.34	68	68.0

Peak Side Load Pull Performance – Pulsed CW signal: 16 μ sec, 10% duty cycle; 28 V, 850 mA

Freq [MHz]	Z Source [Ω]	Z Load [Ω]	P _{1dB}				P _{1dB}				
			Gain [dB]	P _{OUT} [dBm]	P _{OUT} [W]	PAE [%]	Z Load [Ω]	Gain [dB]	P _{OUT} [dBm]	P _{OUT} [W]	PAE [%]
1805	7.5 – j8.9	1.5 – j9.3	18.2	51.47	140	52.8	2.4 – j8.3	20.1	50.17	104	62.5
1842	6.7 – j5.2	1.2 – j9.2	18.2	51.68	147	53.1	2.4 – j8.3	20.3	50.09	102	62.9
1880	5.5 – j6.8	1.4 – j9.7	18.7	51.35	136	54.0	2.4 – j8.3	20.5	49.95	99	62.2


Reference Circuit (1880 MHz)

DUT PTAB182002TC

Reference Circuit Part No. LTA/PTAB182002TC V2

PCB Rogers 4350, 0.762 mm [.030"] thick, 2 oz. copper, $\epsilon_r = 3.66$

Find Gerber files for this test fixture on the Infineon Web site at (<http://www.infineon.com/rfpower>)

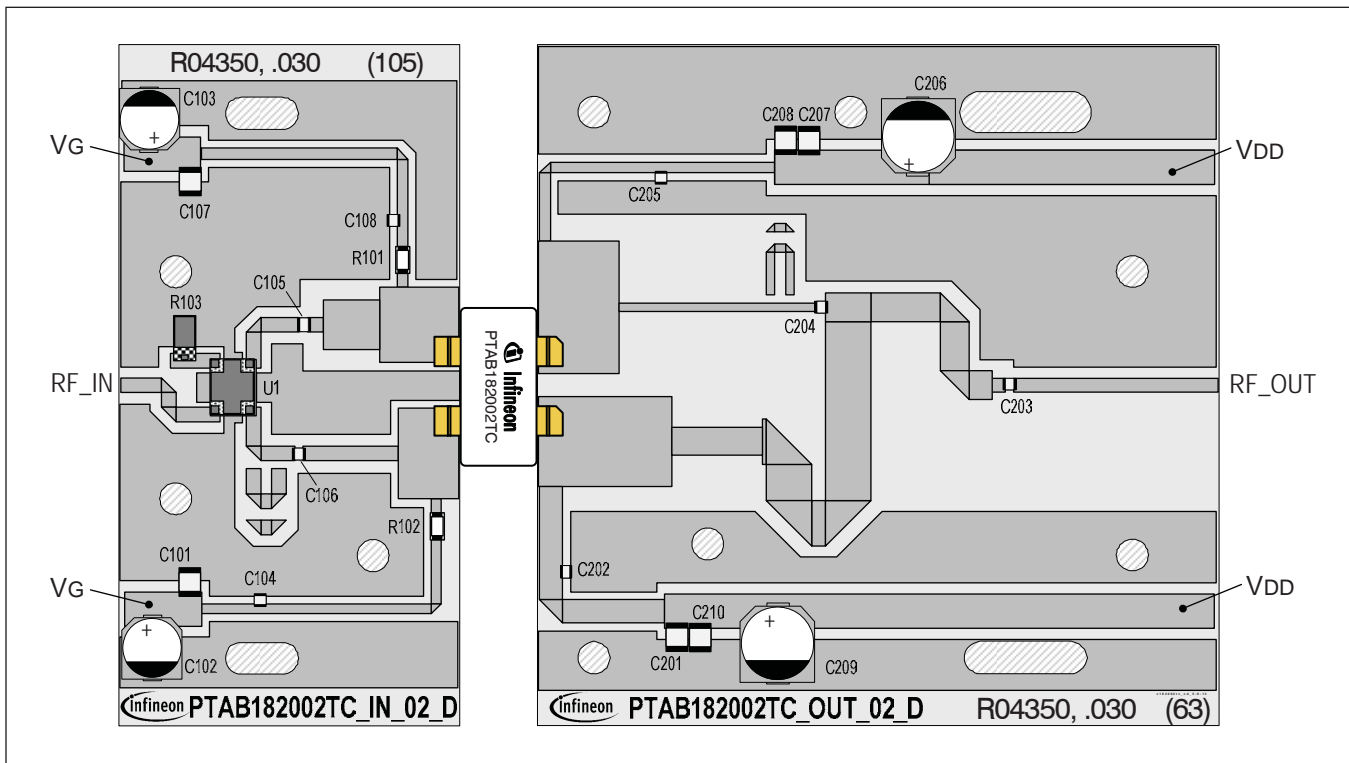


Reference circuit assembly diagram (not to scale)

Components Information

Component	Description	Manufacturer	P/N
Input			
C101, C107	Capacitor, 10 μ F	Taiyo Yuden	UMK325C7106MM-T
C102, C103	Capacitor, 10 μ F	Panasonic Electronic Components – ECG	EEV-HD1H100P
C104, C105, C106, C108	Chip capacitor, 24 pF	ATC	ATC100A240JW150XB
R101, R102	Resistor, 10 Ω	Panasonic Electronic Components – ECG	ERJ-8GEYJ100V
R103	Resistor, 50 Ω	Anaren	C16A50Z4
U1	RF Directional Coupler	Anaren	X3C19P1-05S
Output			
C201, C207, C208, C210	Capacitor, 10 μ F	Taiyo Yuden	UMK325C7106MM-T
C202, C203, C204, C205	Chip capacitor, 24 pF	ATC	ATC100A240JW150XB
C206, C209	Capacitor, 220 μ F	Panasonic Electronic Components – ECG	EEE-FP1V221AP

Package Outline Specifications

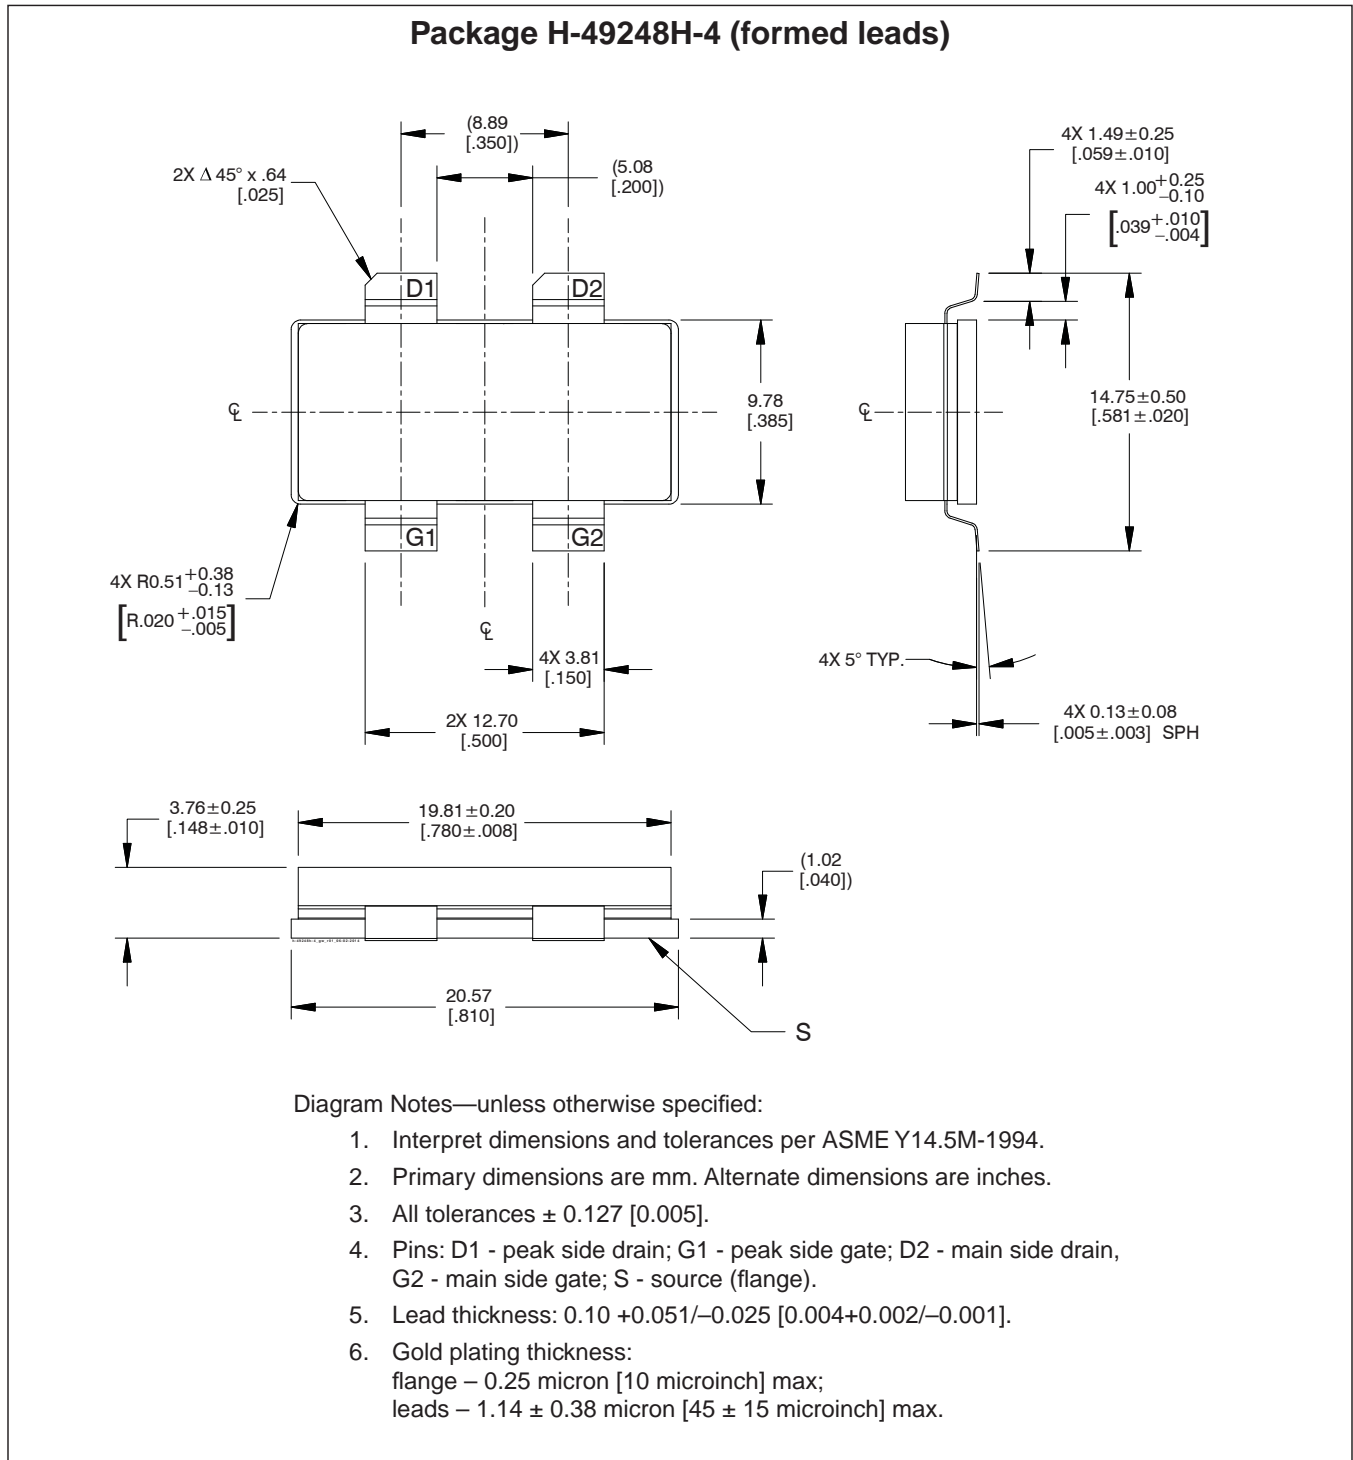

Find the latest and most complete information about products and packaging at the Infineon Internet page (<http://www.infineon.com/rfpower>)

Revision History


Revision	Date	Data Sheet	Page	Subjects (major changes in comparison with previous revisions)
01	2012-12-03	Advance	all	Preliminary specifications for this product
02	2012-12-21	Preliminary	all	Product further developed
03	2013-06-02	Production	all	Final characterization of production-released product
04	2014-07-01	Production	all	Product now Version 2 due to package change
			1, 2	Features and tables updated

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?
 Your feedback will help us to continuously improve the quality of this document.
 Please send your proposal (including a reference to this document) to:

highpowerRF@infineon.com

To request other information, contact us at:
 +1 877 465 3667 (1-877-GO-LDMOS) USA
 or +1 408 776 0600 International



Edition 2014-07-01

Published by
Infineon Technologies AG
 85579 Neubiberg, Germany

© 2012 Infineon Technologies AG
 All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com/rfpower).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Infineon\(英飞凌\)](#)