





## NOTES:

- ROHS COMPLIANT
- HEADER: THERMOSET PLASTIC MATERIAL WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
- STORAGE TEMPERATURE: -20°C TO +125°C
- 4. COMPLIANCE TO J-STD:
  - J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
  - J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE В.
  - J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
- TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX TO THE PART NUMBER(i.e H5008NL BECOMES H5008NLT).








FINAL OUTLINE

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (07/31/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,1GD,1:1,SM	H5008NL-17	PS-2268.001-C	1 OF 3	H5008NL	A





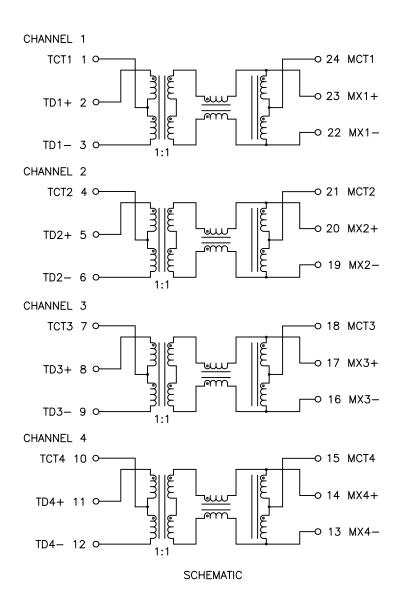

ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED MEETS IEEE 802.3 SPECIFICATION

PARAMETER	SPECIFICATIONS				
OPERATING TEMP	0°C - 70°C				
TURNS RATIO	1.00 ± 2%				
POLARITY	PER SCHEMATIC				
	100 KHz	1-125 MHz			
INSERTION LOSS	-1.2 dB MAX	-0.2-0.002*f <sup>1.4</sup> dB MAX			
RETURN LOSS	.1-40 MHz	40-100 MHz			
$(Z \text{ OUT} = 100 \text{ OHM } \pm 15\%)$	-16 dB MIN	-10+20*LOG <sub>10</sub> (f/80 MHz) dB MIN			
INDUCTANCE (OCL) (MEDIA SIDE, 0-70°C)	350 uH MIN(	(MEASURED AT 100 KHz, 100 mVRMS) WITH 8 mA DC BIAS			
	1 MHz	10-100 MHz			
CROSSTALK, ADJACENT CHANNELS	-50 dB MIN	-55+22*LOG <sub>10</sub> (f/10) dB MIN			
COMMON MODE	2 MHz	30-200 MHz			
REJECTION RATIO	-50 dB MIN	-15+20*LOG <sub>10</sub> (f/200) dB MIN			
DC RESISTANCE, 1/2 WINDING	.65 OHMS MAX				
DC RESISTANCE BALANCE	±.065 OHMS MAX (CENTER TAP SYMMETRY)				
INPUT — OUTPUT ISOLATION					


NOTE: f IS FREQUENCY IN MHz.

@ Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (07/31/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,1GD,1:1,SM	H5008NL-17	PS-2268.001-C	2 OF 3	H5008NL	A





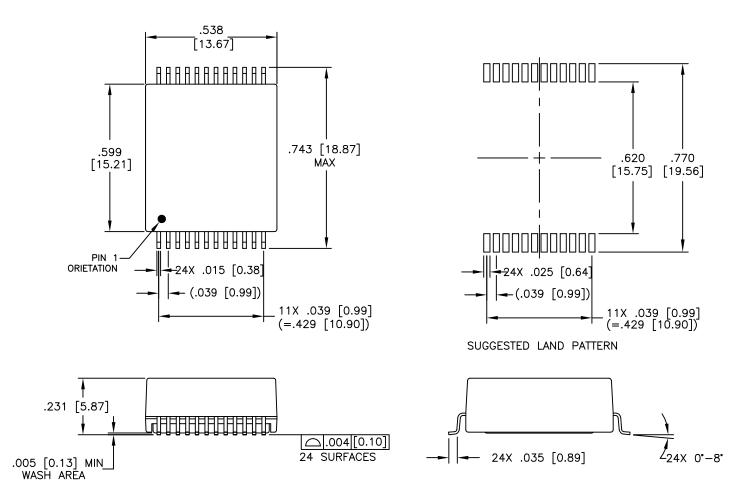

DIMENSIONS ARE IN INCHES [MILLIMETERS] WITH THE FOLLOWING TOLERANCES: [MILLIMETERS] ARE FOR REFERENCE ONLY.  $.XX = \pm .02 \qquad [\pm 0.5] \\ .XXX = \pm .010 \ [\pm 0.25]$ 

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (07/31/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,1GD,1:1,SM	H5008NL-17	PS-2268.001-C	3 OF 3	H5008NL	A

单击下面可查看定价,库存,交付和生命周期等信息

>>Pulse Electronics(普思)