

# BFP640ESD

## Surface mount robust silicon NPN RF bipolar transistor



### Product description

The BFP640ESD is a RF bipolar transistor based on SiGe:C technology that is part of Infineon's established sixth generation transistor family. Its ESD structure, high RF gain and low noise figure characteristics make the device suitable for a wide range of wireless applications. It remains cost competitive without compromising on ease of use.



### Feature list

- Minimum noise figure  $NF_{min} = 0.8$  dB at 3.5 GHz, 3 V, 6 mA
- High gain  $G_{ma} = 19$  dB at 3.5 GHz, 3 V, 30 mA
- $OIP_3 = 26.5$  dBm at 3.5 GHz, 3 V, 30 mA
- High ESD robustness, typical 2 kV (HBM)

### Product validation

Qualified for industrial applications according to the relevant tests of JEDEC47/20/22.

### Potential applications

- Low noise amplifiers (LNAs) in GNSS receivers
- LNAs in satellite radio (SDARs, DAB) receivers
- LNAs in multimedia applications such as CATV and FM radio

### Device information

**Table 1** Part information

| Product name / Ordering code    | Package | Pin configuration |       |       |       | Marking | Pieces / Reel |
|---------------------------------|---------|-------------------|-------|-------|-------|---------|---------------|
| BFP640ESD / BFP640ESDH6327XTSA1 | SOT343  | 1 = B             | 2 = E | 3 = C | 4 = E | T4s     | 3000          |

**Attention:** *ESD (Electrostatic discharge) sensitive device, observe handling precautions*

---

Table of contents

**Table of contents**

|          |  |    |
|----------|--|----|
|          | <b>Product description</b> .....             | 1  |
|          | <b>Feature list</b> .....                    | 1  |
|          | <b>Product validation</b> .....              | 1  |
|          | <b>Potential applications</b> .....          | 1  |
|          | <b>Device information</b> .....              | 1  |
|          | <b>Table of contents</b> .....               | 2  |
| <b>1</b> | <b>Absolute maximum ratings</b> .....        | 3  |
| <b>2</b> | <b>Thermal characteristics</b> .....         | 4  |
| <b>3</b> | <b>Electrical characteristics</b> .....      | 5  |
| 3.1      | DC characteristics .....                     | 5  |
| 3.2      | General AC characteristics .....             | 5  |
| 3.3      | Frequency dependent AC characteristics ..... | 6  |
| 3.4      | Characteristic DC diagrams .....             | 10 |
| 3.5      | Characteristic AC diagrams .....             | 13 |
| <b>4</b> | <b>Package information SOT343</b> .....      | 19 |
|          | <b>Revision history</b> .....                | 20 |
|          | <b>Disclaimer</b> .....                      | 21 |

**Absolute maximum ratings**

**1 Absolute maximum ratings**

**Table 2 Absolute maximum ratings at  $T_A = 25\text{ °C}$  (unless otherwise specified)**

| Parameter                               | Symbol     | Values |      | Unit | Note or test condition                         |
|---|------------|--------|------|------|--|
|   |            | Min.   | Max. |      |  |
| Collector emitter voltage               | $V_{CEO}$  | -      | 4.1  | V    | Open base                                      |
|   |            |        | 3.6  |      | $T_A = -55\text{ °C}$ , open base              |
| Collector emitter voltage <sup>1)</sup> | $V_{CES}$  | -      | 4.1  |      | E-B short circuited                            |
|   |            |        | 3.6  |      | $T_A = -55\text{ °C}$ ,<br>E-B short circuited |
| Collector base voltage <sup>2)</sup>    | $V_{CBO}$  | -      | 4.8  |      | Open emitter                                   |
|   |            |        | 4.3  |      | $T_A = -55\text{ °C}$ , open emitter           |
| Base current                            | $I_B$      | -10    | 6    | mA   | -  |
| Collector current                       | $I_C$      | -      | 50   |      |  |
| RF input power                          | $P_{RFIn}$ |        | 21   |      |  |
| ESD stress pulse                        | $V_{ESD}$  | -2     | 2    | kV   | HBM, all pins, acc. to JESD22-A114             |
| Total power dissipation <sup>3)</sup>   | $P_{tot}$  | -      | 200  | mW   | $T_S \leq 88\text{ °C}$                        |
| Junction temperature                    | $T_J$      |        | 150  | °C   | -  |
| Storage temperature                     | $T_{Stg}$  | -55    |      |      |  |

**Attention:** *Stresses above the max. values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Exceeding only one of these values may cause irreversible damage to the integrated circuit.*

<sup>1</sup>  $V_{CES}$  is similar to  $V_{CEO}$  due to design.

<sup>2</sup>  $V_{CBO}$  is similar to  $V_{CEO}$  due to design.


<sup>3</sup>  $T_S$  is the soldering point temperature.  $T_S$  is measured on the emitter lead at the soldering point of the PCB.

Thermal characteristics

## 2 Thermal characteristics

**Table 3 Thermal resistance**

| Parameter                  | Symbol     | Values |      |      | Unit | Note or test condition |
|----------------------------|------------|--------|------|------|------|------------------------|
|                            |            | Min.   | Typ. | Max. |      |                        |
| Junction - soldering point | $R_{thJS}$ | -      | 310  | -    | K/W  | -                      |

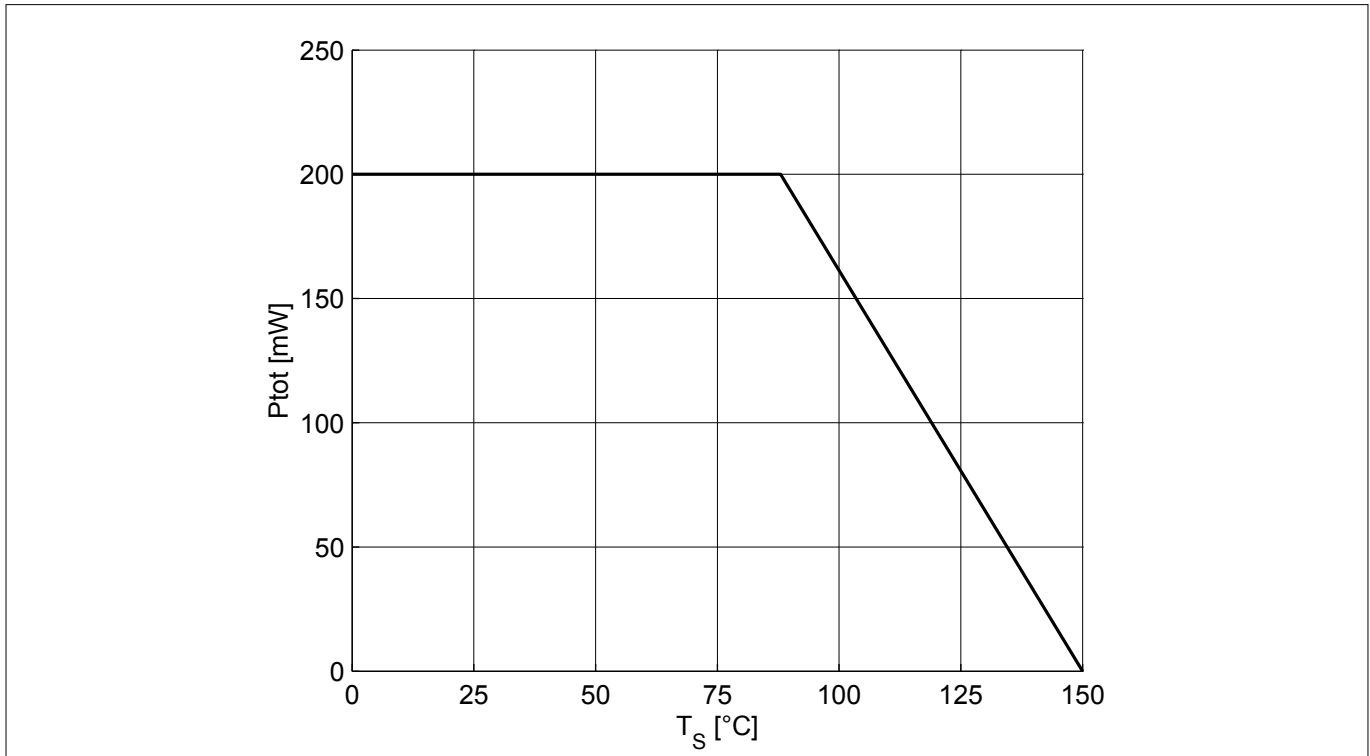

**Figure 1 Total power dissipation  $P_{tot} = f(T_S)$**

**Electrical characteristics**

**3 Electrical characteristics**

**3.1 DC characteristics**

**Table 4 DC characteristics at  $T_A = 25\text{ }^\circ\text{C}$**

| Parameter                           | Symbol        | Values |      |                   | Unit          | Note or test condition  |
|-------------------------------------|---------------|--------|------|-------------------|---------------|---|
|                                     |               | Min.   | Typ. | Max.              |               |   |
| Collector emitter breakdown voltage | $V_{(BR)CEO}$ | 4.1    | 4.7  | –                 | V             | $I_C = 1\text{ mA}$ , $I_B = 0$ , open base                   |
| Collector emitter leakage current   | $I_{CES}$     | –      | –    | 500 <sup>4)</sup> | nA            | $V_{CE} = 2\text{ V}$ , $V_{BE} = 0$ , E-B short circuited    |
| Collector base leakage current      | $I_{CBO}$     |        |      | 500 <sup>4)</sup> |               | $V_{CB} = 2\text{ V}$ , $I_E = 0$ , open emitter              |
| Emitter base leakage current        | $I_{EBO}$     |        |      | 10 <sup>4)</sup>  | $\mu\text{A}$ | $V_{EB} = 0.5\text{ V}$ , $I_C = 0$ , open collector          |
| DC current gain                     | $h_{FE}$      | 110    | 180  | 270               |               | $V_{CE} = 3\text{ V}$ , $I_C = 30\text{ mA}$ , pulse measured |

**3.2 General AC characteristics**

**Table 5 General AC characteristics at  $T_A = 25\text{ }^\circ\text{C}$**


| Parameter                     | Symbol   | Values |      |      | Unit | Note or test condition   |
|-------------------------------|----------|--------|------|------|------|--|
|                               |          | Min.   | Typ. | Max. |      |  |
| Transition frequency          | $f_T$    | –      | 45   | –    | GHz  | $V_{CE} = 3\text{ V}$ , $I_C = 30\text{ mA}$ , $f = 1\text{ GHz}$                |
| Collector base capacitance    | $C_{CB}$ |        | 0.08 |      | pF   | $V_{CB} = 3\text{ V}$ , $V_{BE} = 0$ , $f = 1\text{ MHz}$ , emitter grounded     |
| Collector emitter capacitance | $C_{CE}$ |        | 0.4  |      |      | $V_{CE} = 3\text{ V}$ , $V_{BE} = 0$ , $f = 1\text{ MHz}$ , base grounded        |
| Emitter base capacitance      | $C_{EB}$ |        | 0.7  |      |      | $V_{EB} = 0.4\text{ V}$ , $V_{CB} = 0$ , $f = 1\text{ MHz}$ , collector grounded |

<sup>4</sup> Maximum values not limited by the device but by the short cycle time of the 100% test.

**Electrical characteristics**

**3.3 Frequency dependent AC characteristics**

Measurement setup is a test fixture with Bias-T's in a 50 Ω system,  $T_A = 25\text{ °C}$ .

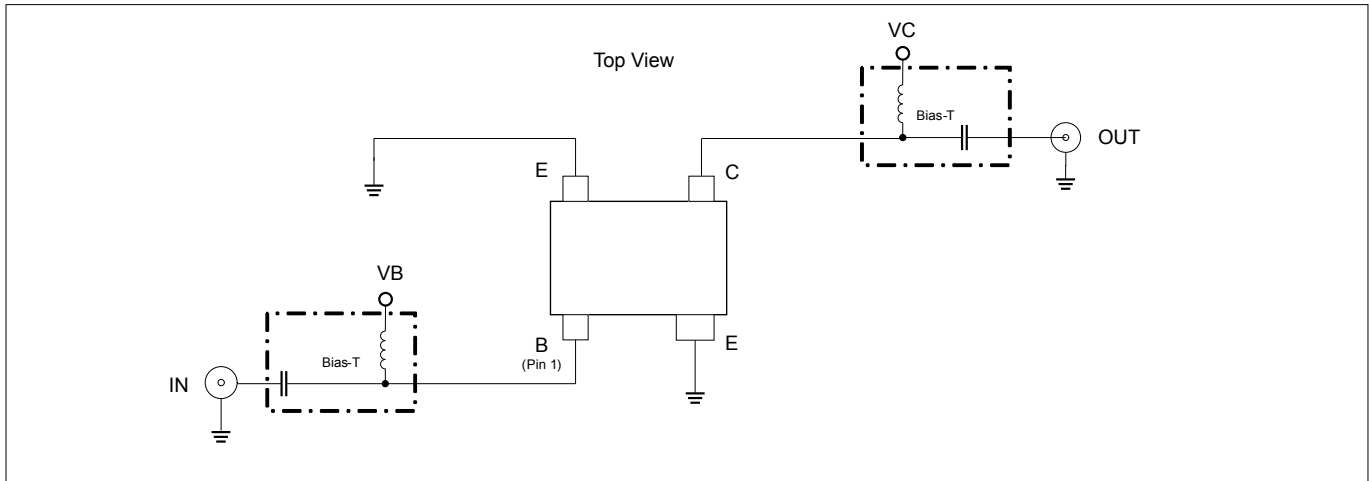

**Figure 2 Testing circuit**

**Table 6 AC characteristics,  $V_{CE} = 3\text{ V}$ ,  $f = 150\text{ MHz}$**

| Parameter  | Symbol                   | Values        |                |      | Unit | Note or test condition                                |
|--|--------------------------|---------------|----------------|------|------|---|
|  |                          | Min.          | Typ.           | Max. |      |   |
| Power gain   |                          | -             |                | -    | dB   | $I_C = 30\text{ mA}$                                  |
| <ul style="list-style-type: none"> <li>Maximum power gain</li> <li>Transducer gain</li> </ul>  | $G_{ms}$<br>$ S_{21} ^2$ |               | <br>39.5<br>35 |      |      |   |
| Noise figure   |                          |               |                |      |      | $I_C = 6\text{ mA}$                                   |
| <ul style="list-style-type: none"> <li>Minimum noise figure</li> <li>Associated gain</li> </ul>                                      | $NF_{min}$<br>$G_{ass}$  | <br>0.6<br>30 |                |      |      |   |
| Linearity  |                          |               |                |      | dBm  | $I_C = 30\text{ mA}$ , $Z_S = Z_L = 50\text{ }\Omega$ |
| <ul style="list-style-type: none"> <li>3rd order intercept point at output</li> <li>1 dB gain compression point at output</li> </ul> | $OIP_3$<br>$OP_{1dB}$    | <br>25<br>11  |                |      |      |   |

**Table 7 AC characteristics,  $V_{CE} = 3\text{ V}$ ,  $f = 450\text{ MHz}$**

| Parameter  | Symbol                   | Values          |                |      | Unit | Note or test condition                                |
|--|--------------------------|-----------------|----------------|------|------|---|
|  |                          | Min.            | Typ.           | Max. |      |   |
| Power gain   |                          | -               |                | -    | dB   | $I_C = 30\text{ mA}$                                  |
| <ul style="list-style-type: none"> <li>Maximum power gain</li> <li>Transducer gain</li> </ul>  | $G_{ms}$<br>$ S_{21} ^2$ |                 | <br>34.5<br>32 |      |      |   |
| Noise figure   |                          |                 |                |      |      | $I_C = 6\text{ mA}$                                   |
| <ul style="list-style-type: none"> <li>Minimum noise figure</li> <li>Associated gain</li> </ul>                                      | $NF_{min}$<br>$G_{ass}$  | <br>0.6<br>28.5 |                |      |      |   |
| Linearity  |                          |                 |                |      | dBm  | $I_C = 30\text{ mA}$ , $Z_S = Z_L = 50\text{ }\Omega$ |
| <ul style="list-style-type: none"> <li>3rd order intercept point at output</li> <li>1 dB gain compression point at output</li> </ul> | $OIP_3$<br>$OP_{1dB}$    | <br>25<br>11    |                |      |      |   |

**Electrical characteristics**

**Table 8 AC characteristics,  $V_{CE} = 3\text{ V}$ ,  $f = 900\text{ MHz}$**

| Parameter  | Symbol                   | Values |      |      | Unit | Note or test condition                          |
|--|--------------------------|--------|------|------|------|---|
|  |                          | Min.   | Typ. | Max. |      |   |
| Power gain   | $G_{ms}$<br>$ S_{21} ^2$ | -      | 30.5 | -    | dB   | $I_C = 30\text{ mA}$                            |
| <ul style="list-style-type: none"> <li>Maximum power gain</li> <li>Transducer gain</li> </ul>  |                          |        | 28   |      |      |   |
| Noise figure   | $NF_{min}$<br>$G_{ass}$  |        | 0.6  |      |      | $I_C = 6\text{ mA}$                             |
| <ul style="list-style-type: none"> <li>Minimum noise figure</li> <li>Associated gain</li> </ul>                                      |                          |        | 26   |      |      |   |
| Linearity  | $OIP_3$<br>$OP_{1dB}$    |        | 26   |      | dBm  | $I_C = 30\text{ mA}$ , $Z_S = Z_L = 50\ \Omega$ |
| <ul style="list-style-type: none"> <li>3rd order intercept point at output</li> <li>1 dB gain compression point at output</li> </ul> |                          |        | 11.5 |      |      |   |

**Table 9 AC characteristics,  $V_{CE} = 3\text{ V}$ ,  $f = 1.5\text{ GHz}$**

| Parameter  | Symbol                   | Values |      |      | Unit | Note or test condition                          |
|--|--------------------------|--------|------|------|------|---|
|  |                          | Min.   | Typ. | Max. |      |   |
| Power gain   | $G_{ms}$<br>$ S_{21} ^2$ | -      | 26.5 | -    | dB   | $I_C = 30\text{ mA}$                            |
| <ul style="list-style-type: none"> <li>Maximum power gain</li> <li>Transducer gain</li> </ul>  |                          |        | 24   |      |      |   |
| Noise figure   | $NF_{min}$<br>$G_{ass}$  |        | 0.65 |      |      | $I_C = 6\text{ mA}$                             |
| <ul style="list-style-type: none"> <li>Minimum noise figure</li> <li>Associated gain</li> </ul>                                      |                          |        | 23.5 |      |      |   |
| Linearity  | $OIP_3$<br>$OP_{1dB}$    |        | 26.5 |      | dBm  | $I_C = 30\text{ mA}$ , $Z_S = Z_L = 50\ \Omega$ |
| <ul style="list-style-type: none"> <li>3rd order intercept point at output</li> <li>1 dB gain compression point at output</li> </ul> |                          |        | 12   |      |      |   |

**Table 10 AC characteristics,  $V_{CE} = 3\text{ V}$ ,  $f = 1.9\text{ GHz}$**

| Parameter  | Symbol                   | Values |      |      | Unit | Note or test condition                          |
|--|--------------------------|--------|------|------|------|---|
|  |                          | Min.   | Typ. | Max. |      |   |
| Power gain   | $G_{ms}$<br>$ S_{21} ^2$ | -      | 25   | -    | dB   | $I_C = 30\text{ mA}$                            |
| <ul style="list-style-type: none"> <li>Maximum power gain</li> <li>Transducer gain</li> </ul>  |                          |        | 22   |      |      |   |
| Noise figure   | $NF_{min}$<br>$G_{ass}$  |        | 0.65 |      |      | $I_C = 6\text{ mA}$                             |
| <ul style="list-style-type: none"> <li>Minimum noise figure</li> <li>Associated gain</li> </ul>                                      |                          |        | 22   |      |      |   |
| Linearity  | $OIP_3$<br>$OP_{1dB}$    |        | 27   |      | dBm  | $I_C = 30\text{ mA}$ , $Z_S = Z_L = 50\ \Omega$ |
| <ul style="list-style-type: none"> <li>3rd order intercept point at output</li> <li>1 dB gain compression point at output</li> </ul> |                          |        | 12   |      |      |   |

**Electrical characteristics**

**Table 11 AC characteristics,  $V_{CE} = 3\text{ V}$ ,  $f = 2.4\text{ GHz}$**

| Parameter  | Symbol                   | Values |      |      | Unit | Note or test condition                          |
|--|--------------------------|--------|------|------|------|---|
|  |                          | Min.   | Typ. | Max. |      |   |
| Power gain   | $G_{ms}$<br>$ S_{21} ^2$ | -      | 23   | -    | dB   | $I_C = 30\text{ mA}$                            |
| <ul style="list-style-type: none"> <li>Maximum power gain</li> <li>Transducer gain</li> </ul>  |                          |        | 20   |      |      |   |
| Noise figure   | $NF_{min}$<br>$G_{ass}$  |        | 0.7  |      |      | $I_C = 6\text{ mA}$                             |
| <ul style="list-style-type: none"> <li>Minimum noise figure</li> <li>Associated gain</li> </ul>                                      |                          |        | 20   |      |      |   |
| Linearity  | $OIP_3$<br>$OP_{1dB}$    |        | 27   |      | dBm  | $I_C = 30\text{ mA}$ , $Z_S = Z_L = 50\ \Omega$ |
| <ul style="list-style-type: none"> <li>3rd order intercept point at output</li> <li>1 dB gain compression point at output</li> </ul> |                          |        | 12.5 |      |      |   |

**Table 12 AC characteristics,  $V_{CE} = 3\text{ V}$ ,  $f = 3.5\text{ GHz}$**

| Parameter  | Symbol                   | Values |      |      | Unit | Note or test condition                          |
|--|--------------------------|--------|------|------|------|---|
|  |                          | Min.   | Typ. | Max. |      |   |
| Power gain   | $G_{ms}$<br>$ S_{21} ^2$ | -      | 19   | -    | dB   | $I_C = 30\text{ mA}$                            |
| <ul style="list-style-type: none"> <li>Maximum power gain</li> <li>Transducer gain</li> </ul>  |                          |        | 17   |      |      |   |
| Noise figure   | $NF_{min}$<br>$G_{ass}$  |        | 0.8  |      |      | $I_C = 6\text{ mA}$                             |
| <ul style="list-style-type: none"> <li>Minimum noise figure</li> <li>Associated gain</li> </ul>                                      |                          |        | 16   |      |      |   |
| Linearity  | $OIP_3$<br>$OP_{1dB}$    |        | 26.5 |      | dBm  | $I_C = 30\text{ mA}$ , $Z_S = Z_L = 50\ \Omega$ |
| <ul style="list-style-type: none"> <li>3rd order intercept point at output</li> <li>1 dB gain compression point at output</li> </ul> |                          |        | 12.5 |      |      |   |

**Table 13 AC characteristics,  $V_{CE} = 3\text{ V}$ ,  $f = 5.5\text{ GHz}$**

| Parameter  | Symbol                   | Values |      |      | Unit | Note or test condition                          |
|--|--------------------------|--------|------|------|------|---|
|  |                          | Min.   | Typ. | Max. |      |   |
| Power gain   | $G_{ms}$<br>$ S_{21} ^2$ | -      | 14.5 | -    | dB   | $I_C = 30\text{ mA}$                            |
| <ul style="list-style-type: none"> <li>Maximum power gain</li> <li>Transducer gain</li> </ul>  |                          |        | 12.5 |      |      |   |
| Noise figure   | $NF_{min}$<br>$G_{ass}$  |        | 1.05 |      |      | $I_C = 6\text{ mA}$                             |
| <ul style="list-style-type: none"> <li>Minimum noise figure</li> <li>Associated gain</li> </ul>                                      |                          |        | 11.5 |      |      |   |
| Linearity  | $OIP_3$<br>$OP_{1dB}$    |        | 26   |      | dBm  | $I_C = 30\text{ mA}$ , $Z_S = Z_L = 50\ \Omega$ |
| <ul style="list-style-type: none"> <li>3rd order intercept point at output</li> <li>1 dB gain compression point at output</li> </ul> |                          |        | 12.5 |      |      |   |



**Electrical characteristics**


**Table 14 AC characteristics,  $V_{CE} = 3\text{ V}$ ,  $f = 10\text{ GHz}$**

| Parameter                               | Symbol       | Values |      |      | Unit | Note or test condition                          |
|---|--------------|--------|------|------|------|---|
|   |              | Min.   | Typ. | Max. |      |   |
| Power gain                              |              | -      | 10.5 | -    | dB   | $I_C = 30\text{ mA}$                            |
| • Maximum power gain                    | $G_{ms}$     |        |      |      |      |   |
| • Transducer gain                       | $ S_{21} ^2$ |        |      |      |      |   |
|   |              |        |      |      |      |   |
| Noise figure                            |              |        |      |      |      | $I_C = 6\text{ mA}$                             |
| • Minimum noise figure                  | $NF_{min}$   |        | 2    |      |      |   |
| • Associated gain                       | $G_{ass}$    |        | 7    |      |      |   |
| Linearity                               |              |        |      |      | dBm  | $I_C = 30\text{ mA}$ , $Z_S = Z_L = 50\ \Omega$ |
| • 3rd order intercept point at output   | $OIP_3$      |        | 25.5 |      |      |   |
| • 1 dB gain compression point at output | $OP_{1dB}$   |        | 11   |      |      |   |


Note:  $G_{ms} = |S_{21}/S_{12}|$  for  $k < 1$ ;  $G_{ma} = |S_{21}/S_{12}|(k-(k^2-1)^{1/2})$  for  $k > 1$ . In order to get the  $NF_{min}$  values stated in this chapter, the test fixture losses have been subtracted from all measured results.  $OIP_3$  value depends on termination of all intermodulation frequency components. Termination used for this measurement is  $50\ \Omega$  from 0.2 MHz to 12 GHz.

**Electrical characteristics**

**3.4 Characteristic DC diagrams**

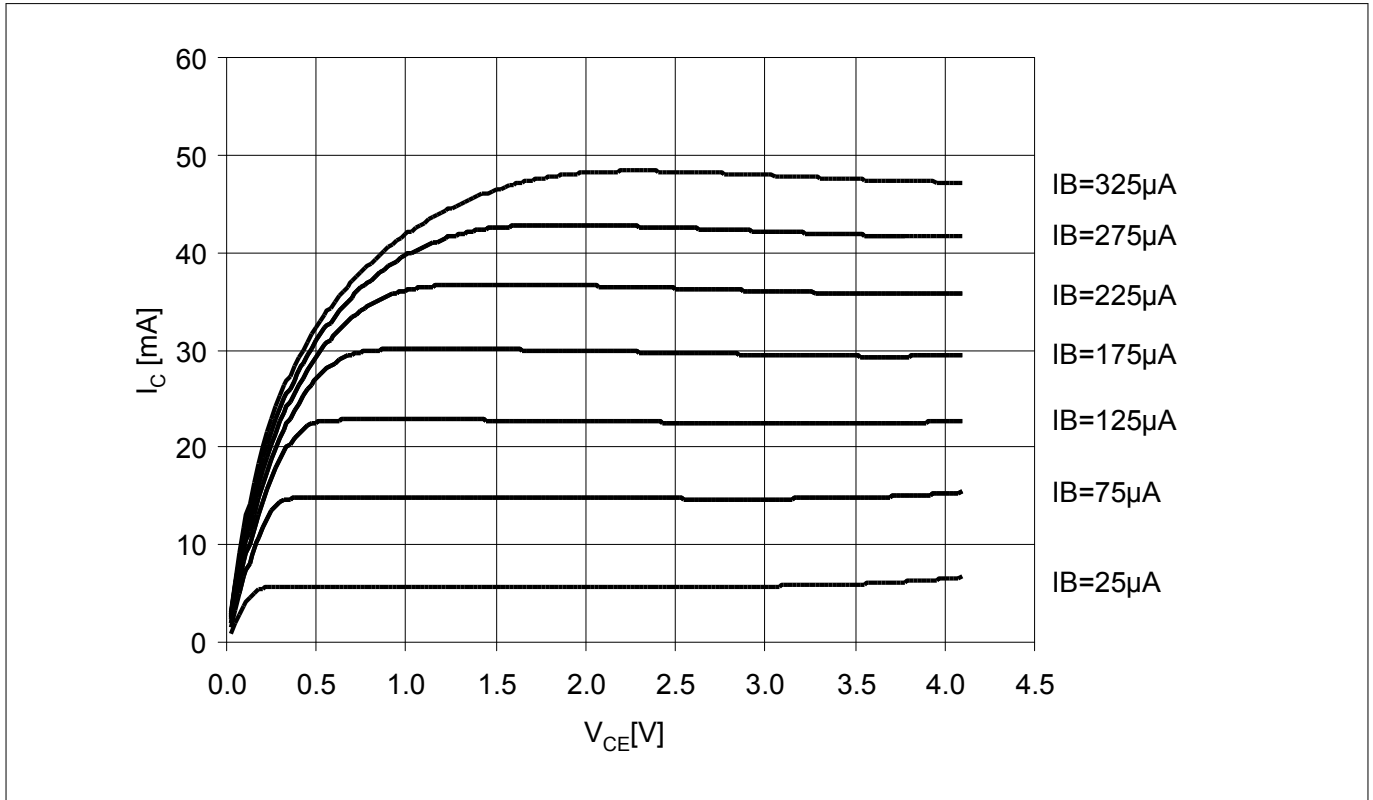


**Figure 3 Collector current vs. collector emitter voltage  $I_C = f(V_{CE})$ ,  $I_B = \text{parameter}$**

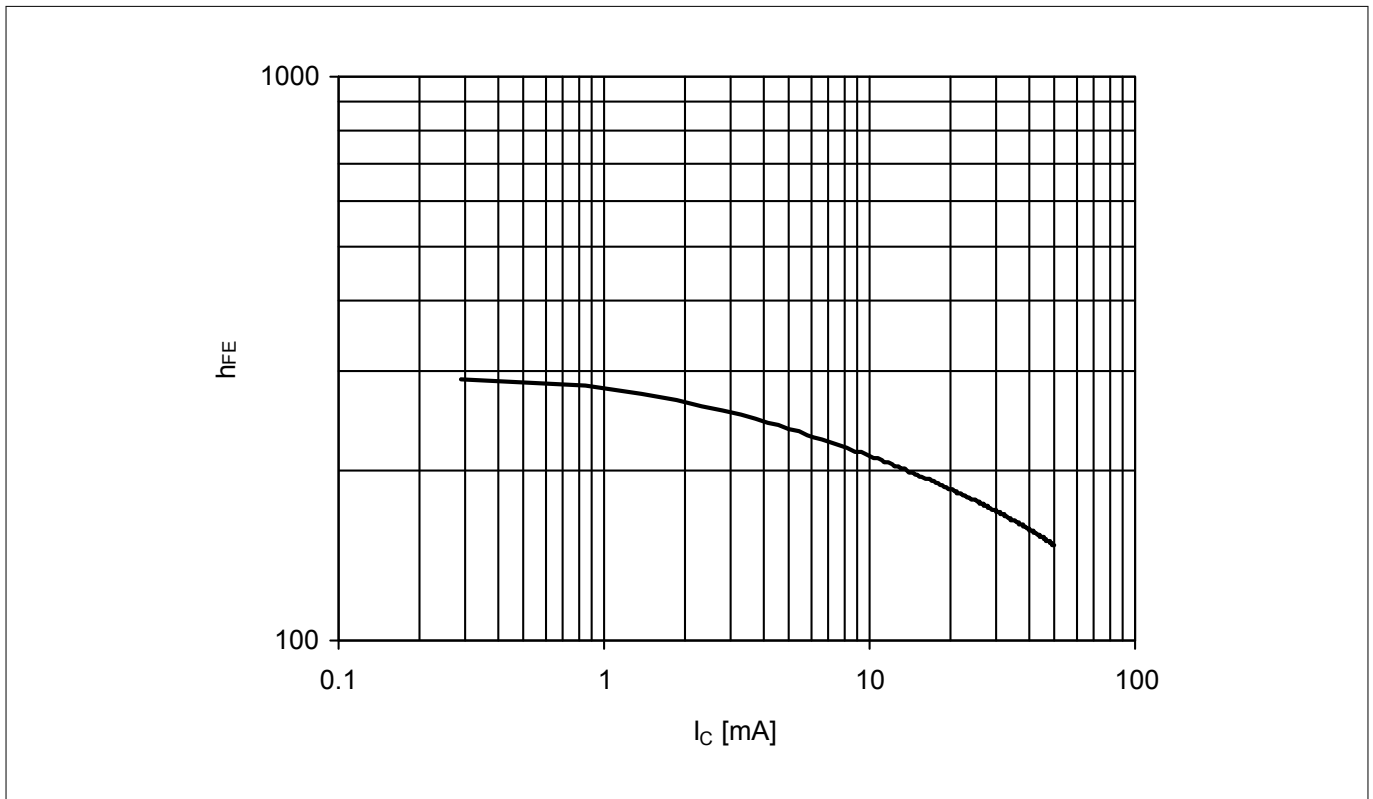


**Figure 4 DC current gain  $h_{FE} = f(I_C)$ ,  $V_{CE} = 3 \text{ V}$**

**Electrical characteristics**

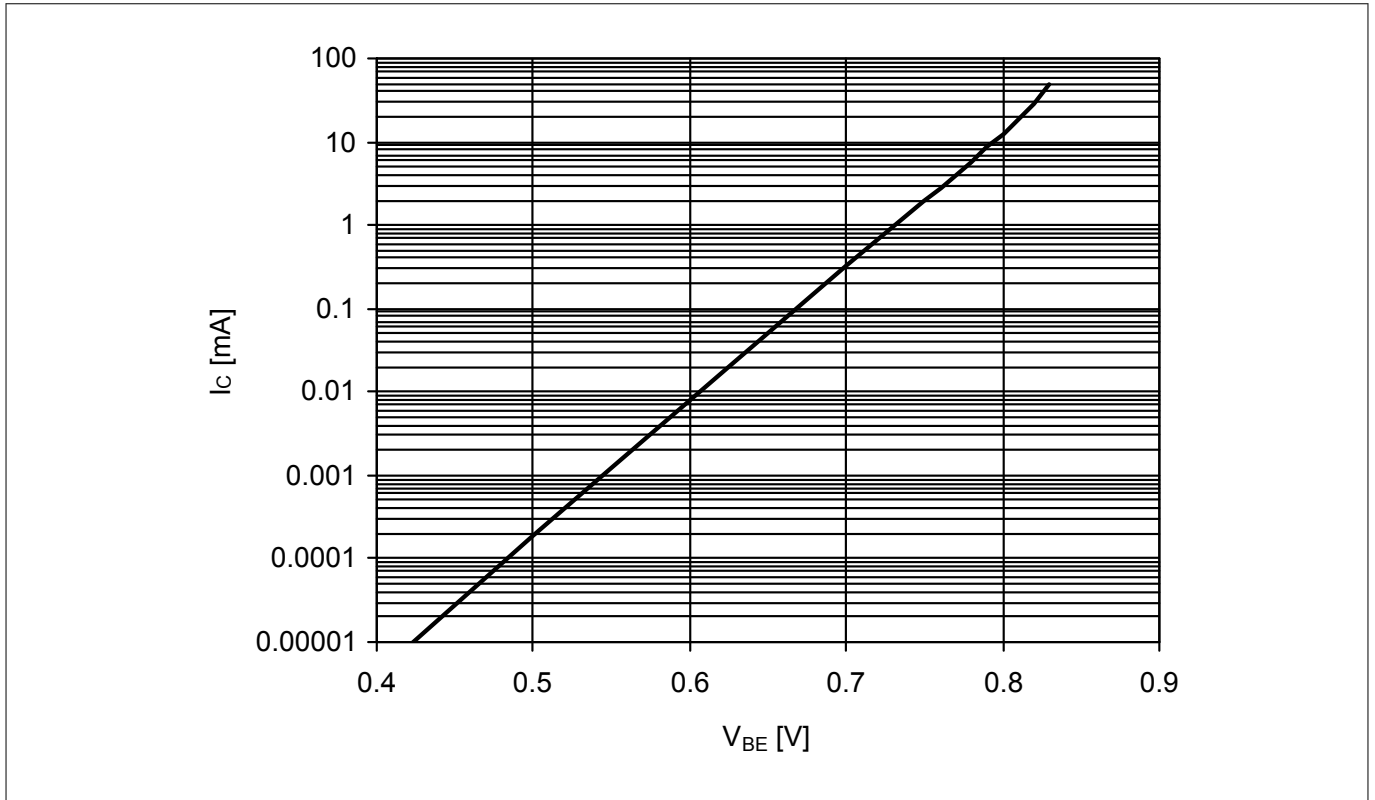


**Figure 5** Collector current vs. base emitter forward voltage  $I_C = f(V_{BE})$ ,  $V_{CE} = 2\text{ V}$

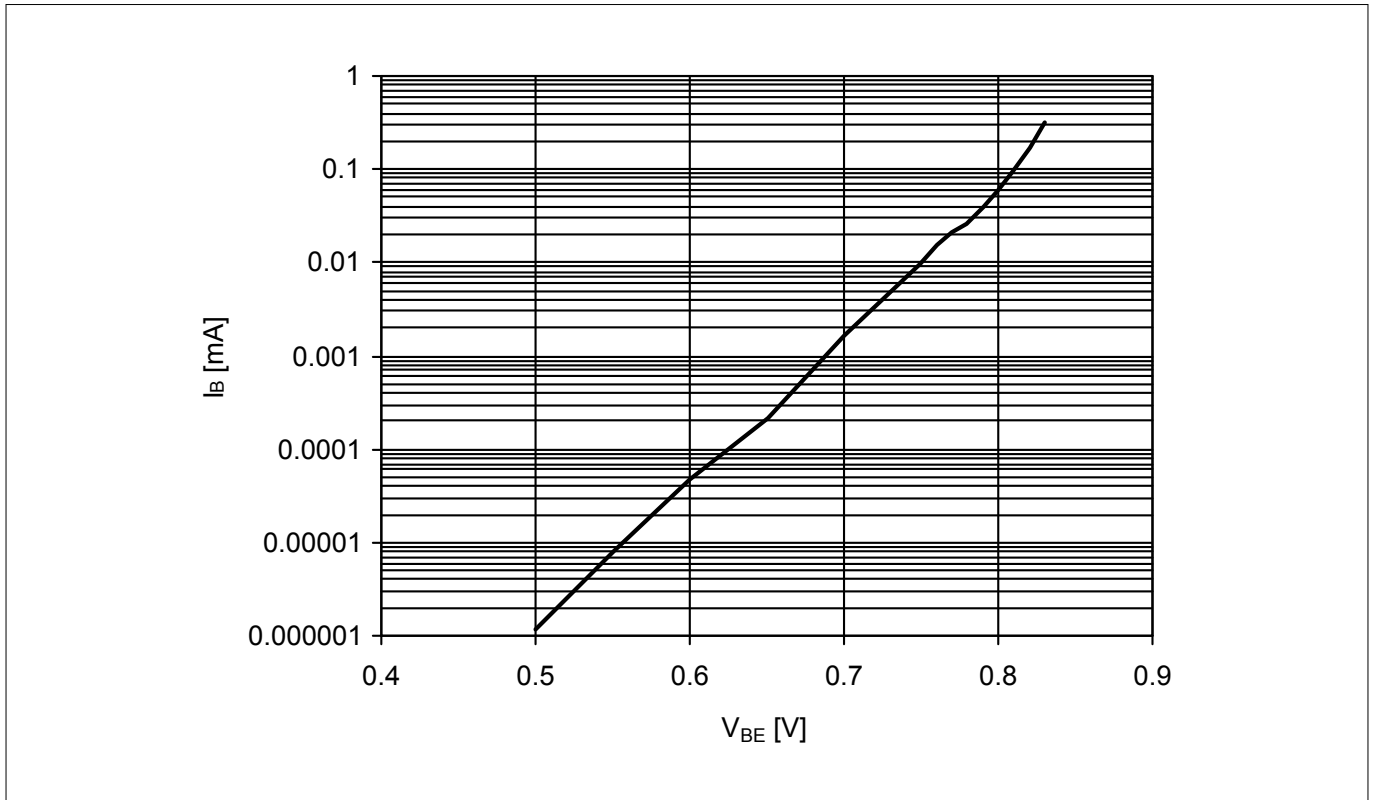

**Figure 6** Base current vs. base emitter forward voltage  $I_B = f(V_{BE})$ ,  $V_{CE} = 2\text{ V}$


**Electrical characteristics**

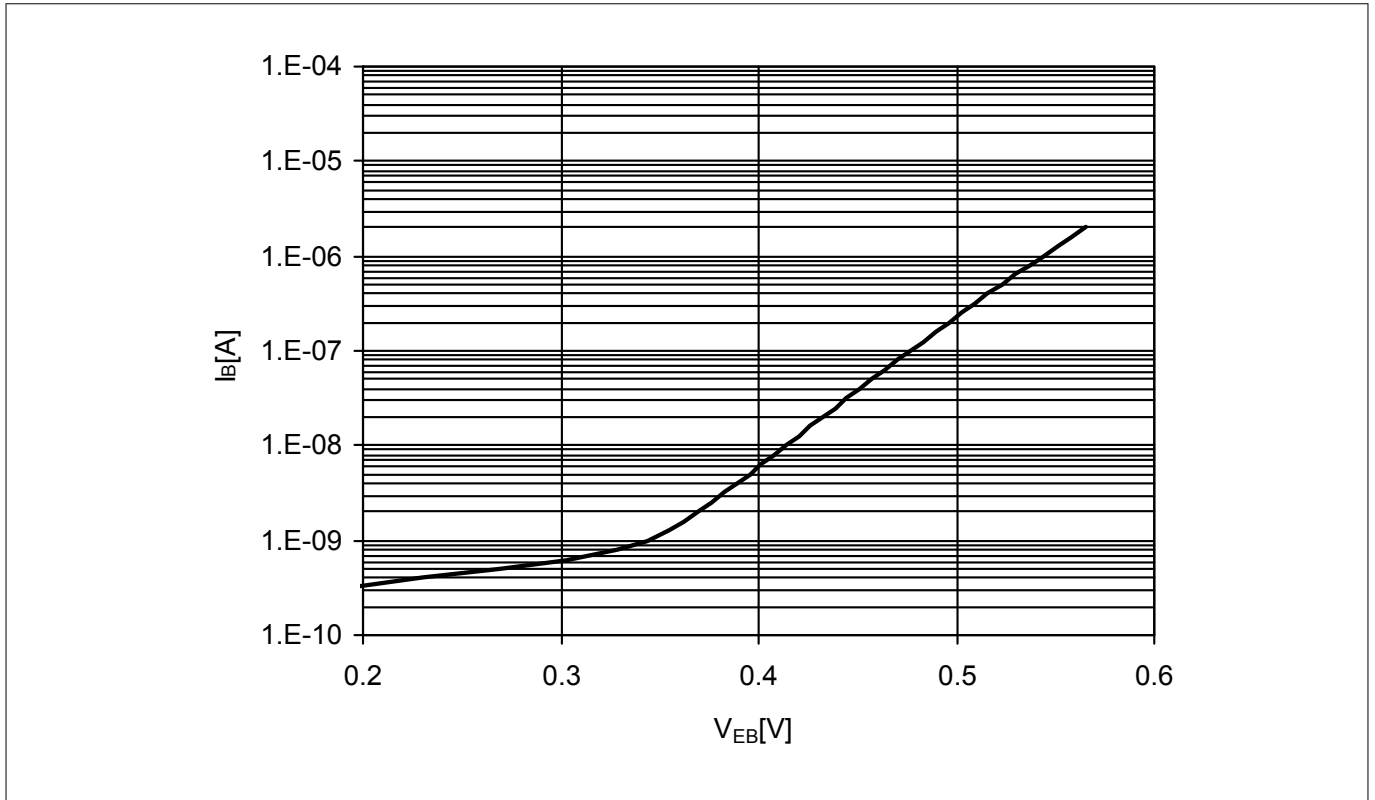


**Figure 7** Base current vs. base emitter reverse voltage  $I_B = f(V_{EB})$ ,  $V_{CE} = 2\text{ V}$

**Electrical characteristics**

**3.5 Characteristic AC diagrams**

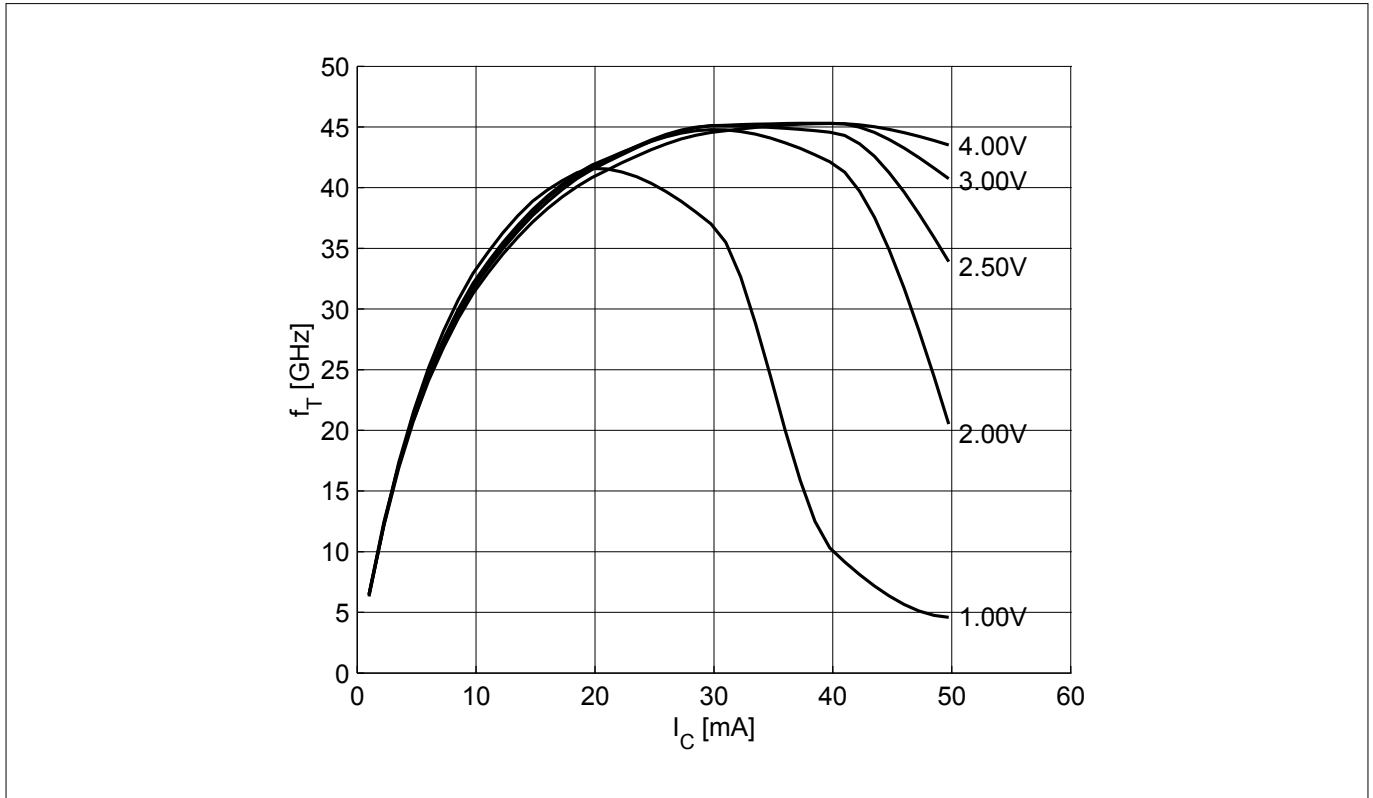


**Figure 8** Transition frequency  $f_T = f(I_C)$ ,  $f = 1 \text{ GHz}$ ,  $V_{CE} = \text{parameter}$

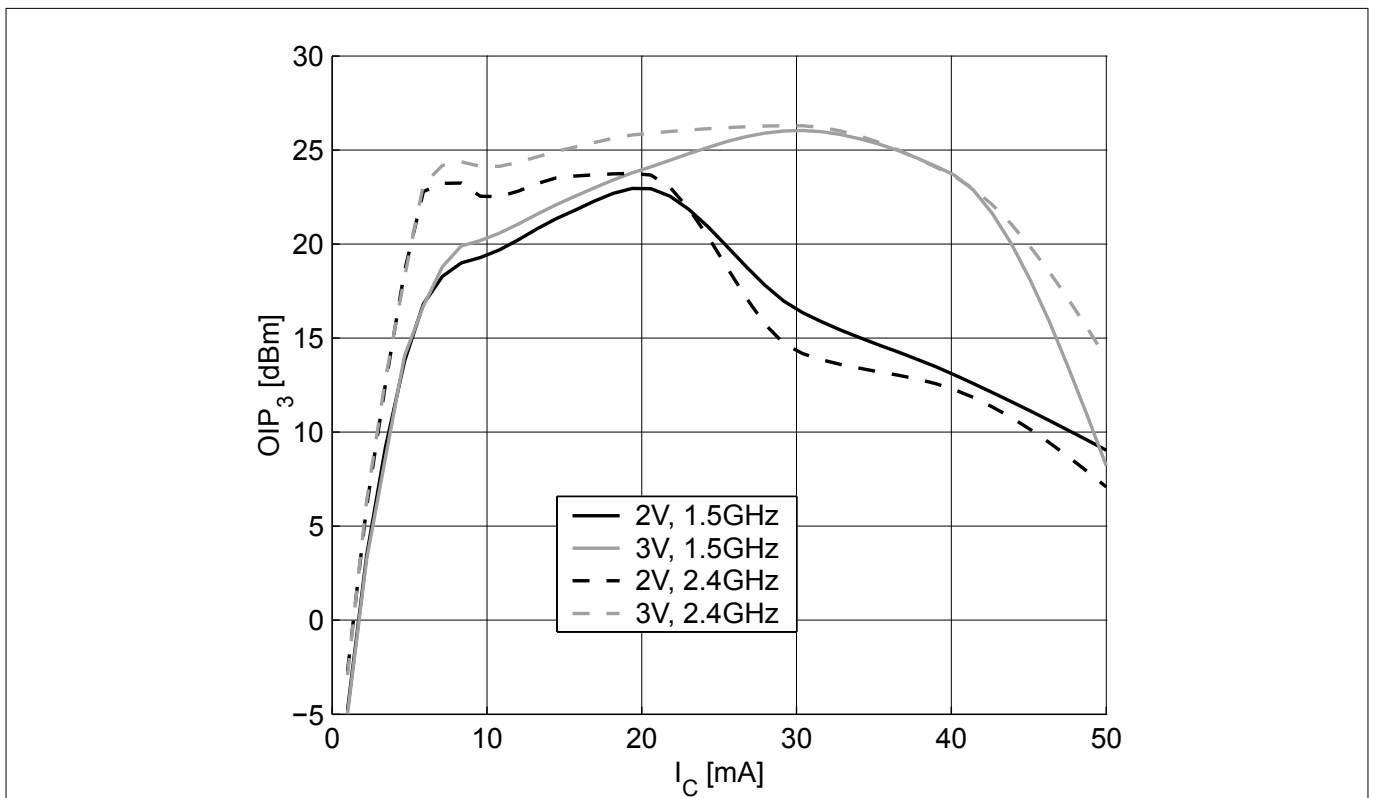


**Figure 9** 3rd order intercept point  $OIP_3 = f(I_C)$ ,  $Z_S = Z_L = 50 \Omega$ ,  $V_{CE}$ ,  $f = \text{parameters}$

**Electrical characteristics**

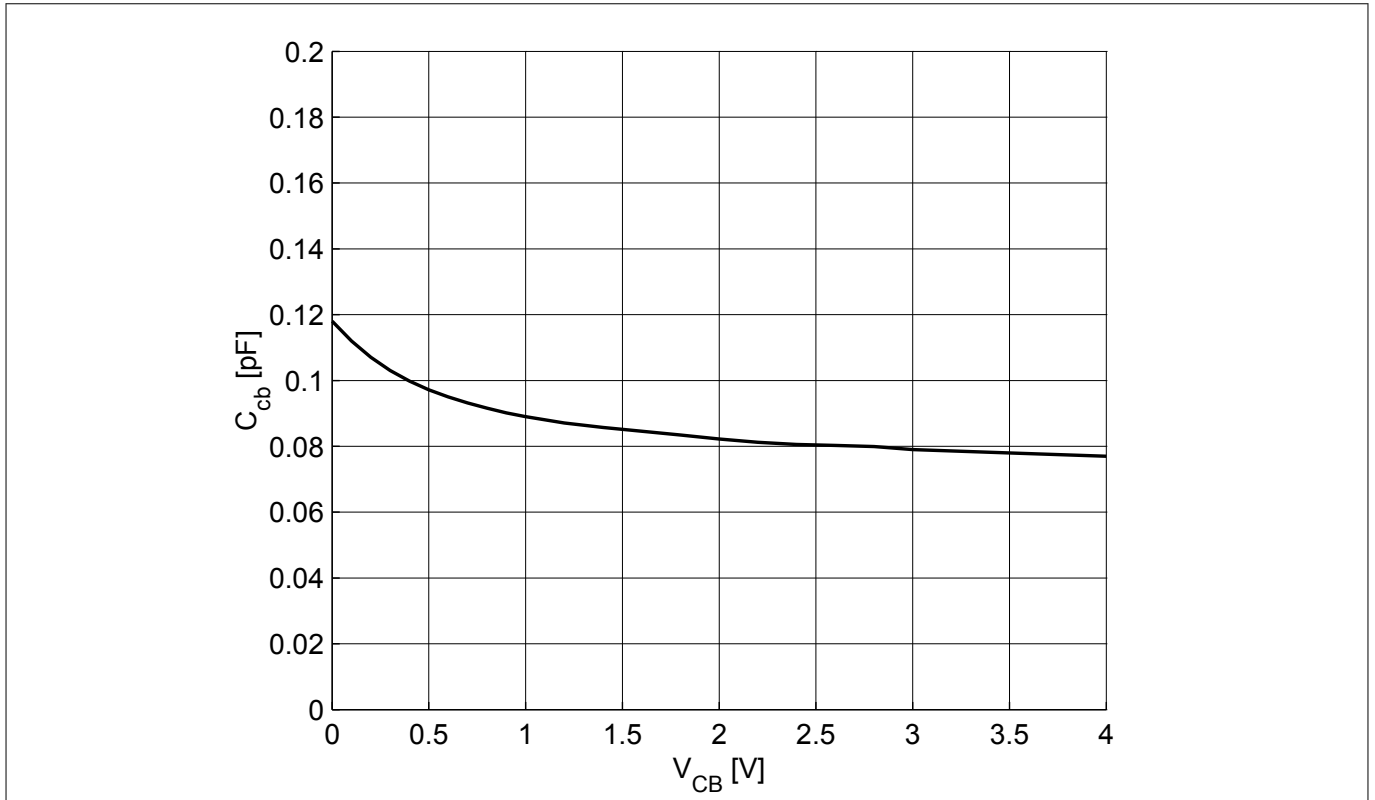


**Figure 10** Collector base capacitance  $C_{CB} = f(V_{CB}), f = 1 \text{ MHz}$

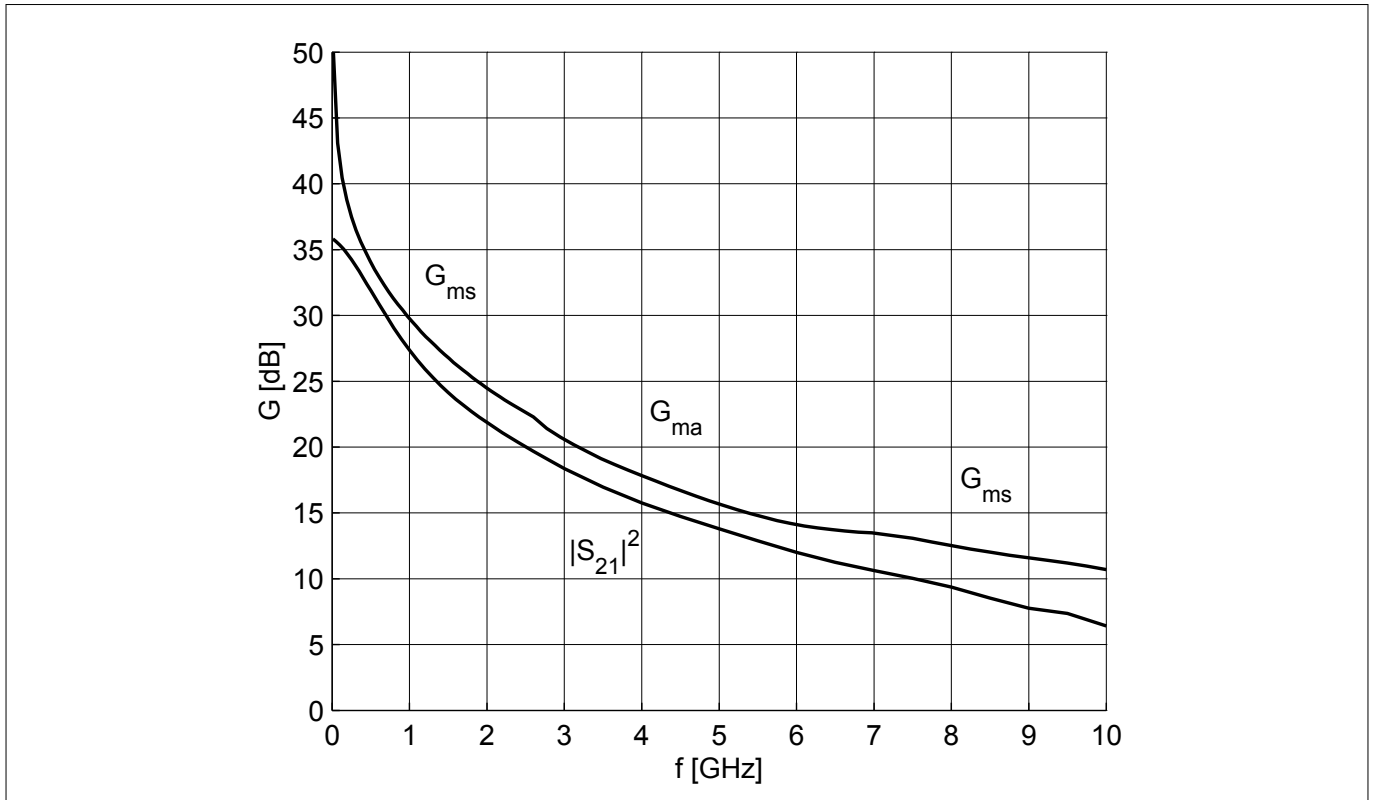


**Figure 11** Gain  $G_{ma}, G_{ms}, |S_{21}|^2 = f(f), V_{CE} = 3 \text{ V}, I_C = 30 \text{ mA}$

**Electrical characteristics**

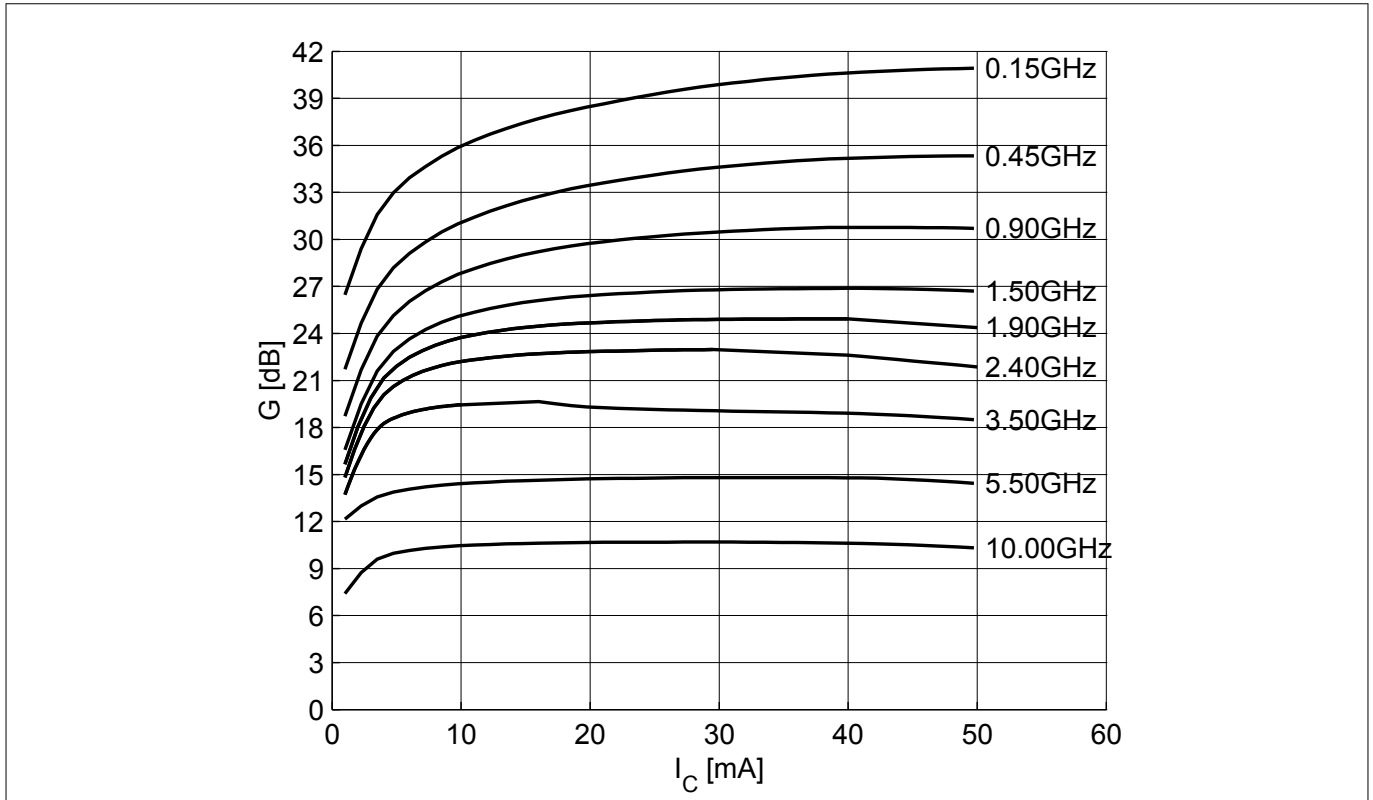


**Figure 12** Maximum power gain  $G_{max} = f(I_C)$ ,  $V_{CE} = 3\text{ V}$ ,  $f = \text{parameter in GHz}$

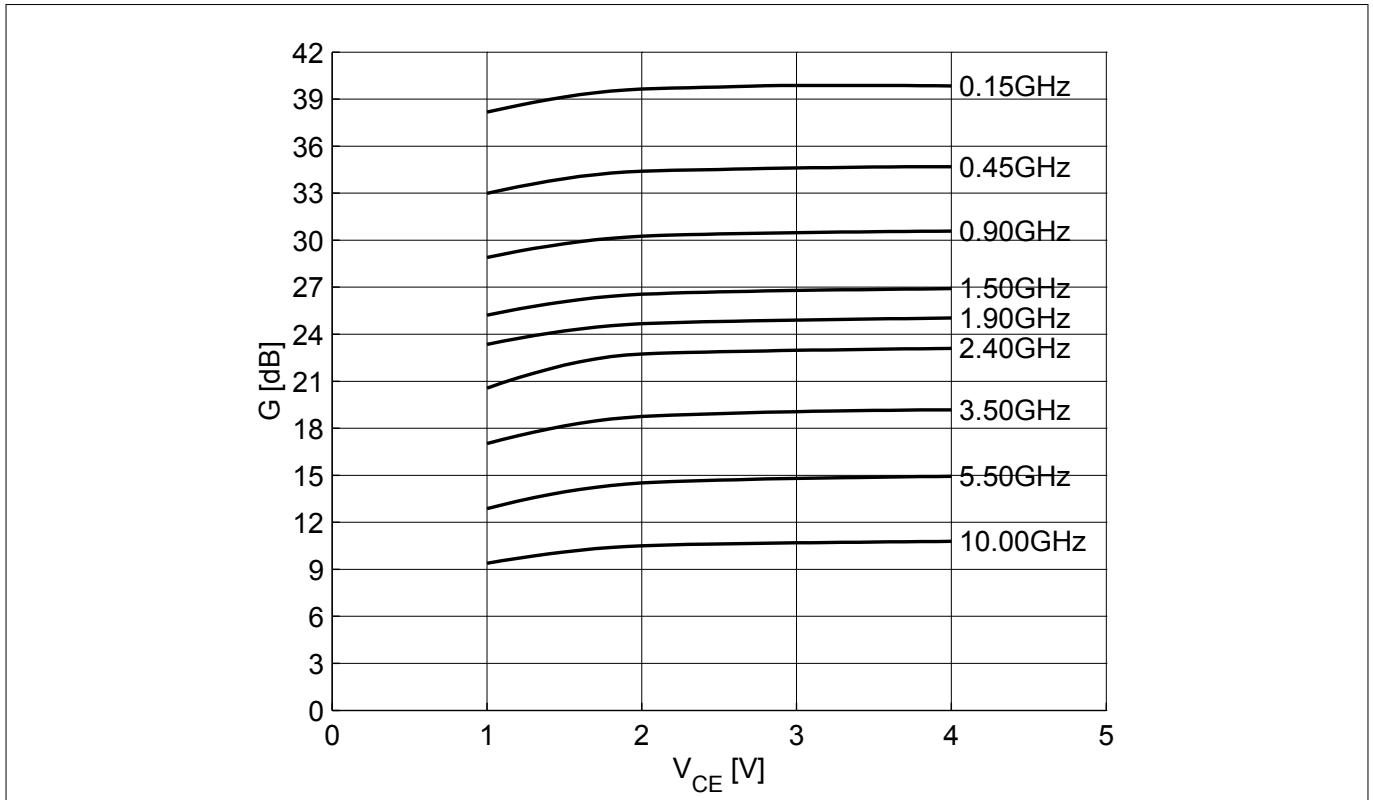


**Figure 13** Maximum power gain  $G_{max} = f(V_{CE})$ ,  $I_C = 30\text{ mA}$ ,  $f = \text{parameter in GHz}$

**Electrical characteristics**

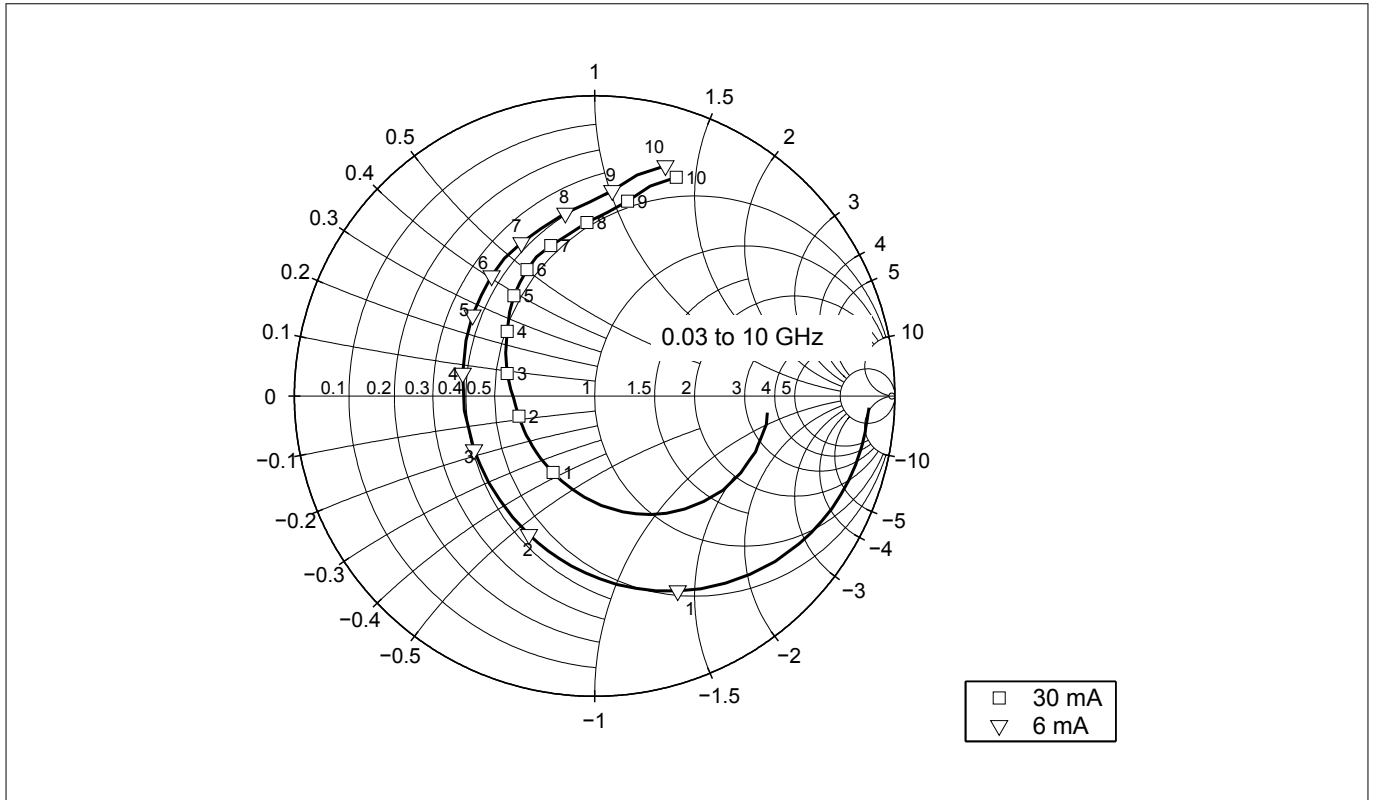


**Figure 14** Input reflection coefficient  $S_{11} = f(f)$ ,  $V_{CE} = 3\text{ V}$ ,  $I_C = 6 / 30\text{ mA}$

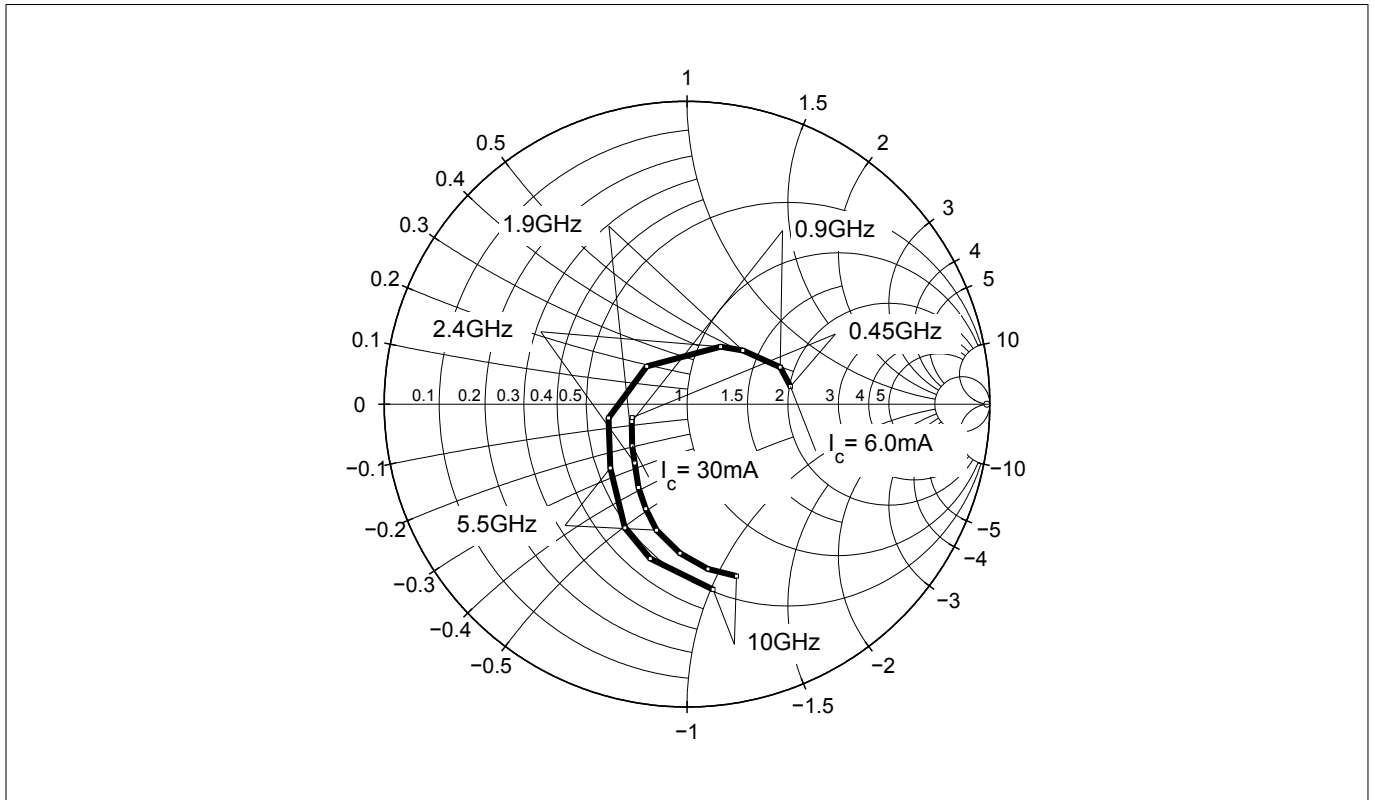


**Figure 15** Source impedance for minimum noise figure  $Z_{S,opt} = f(f)$ ,  $V_{CE} = 3\text{ V}$ ,  $I_C = 6 / 30\text{ mA}$



**Electrical characteristics**

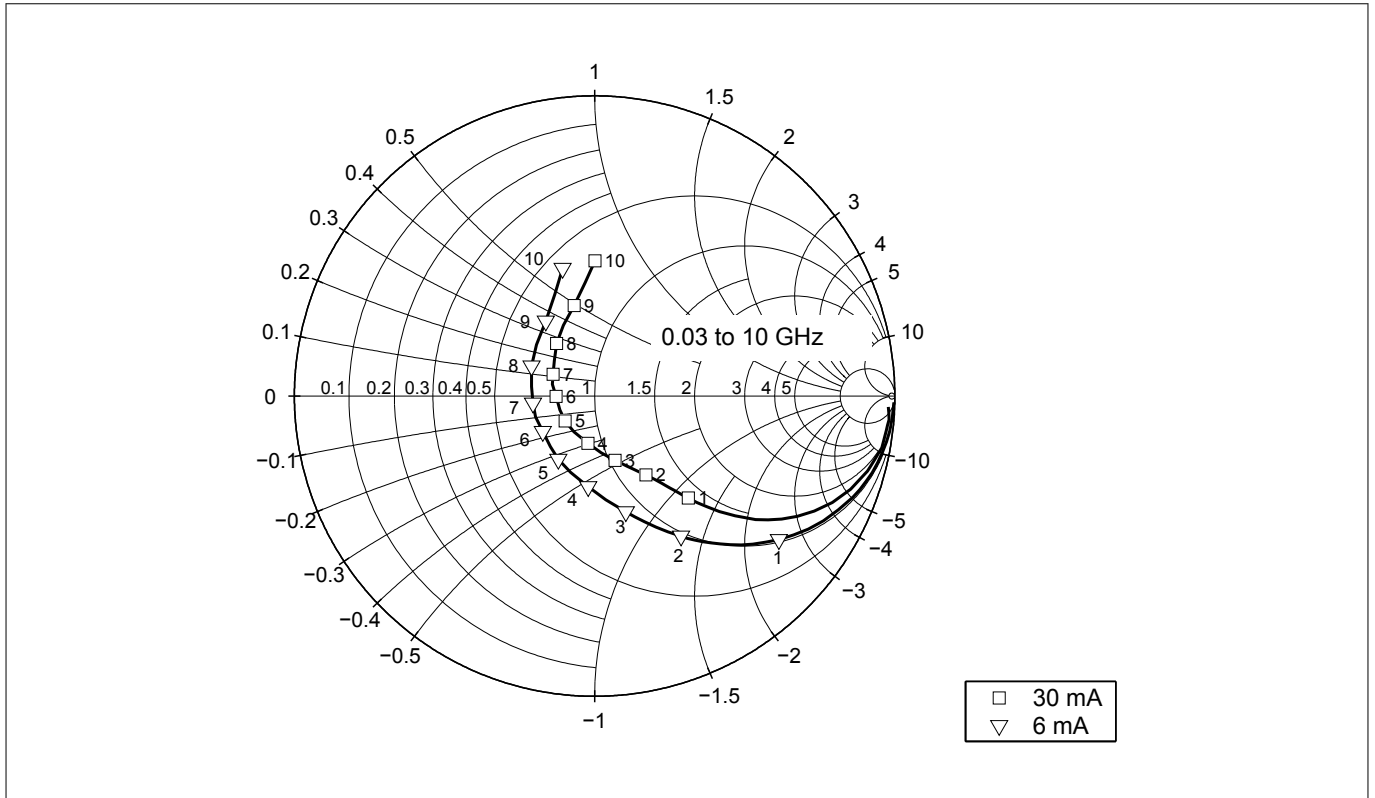


**Figure 16** Output reflection coefficient  $S_{22} = f(f)$ ,  $V_{CE} = 3\text{ V}$ ,  $I_C = 6 / 30\text{ mA}$

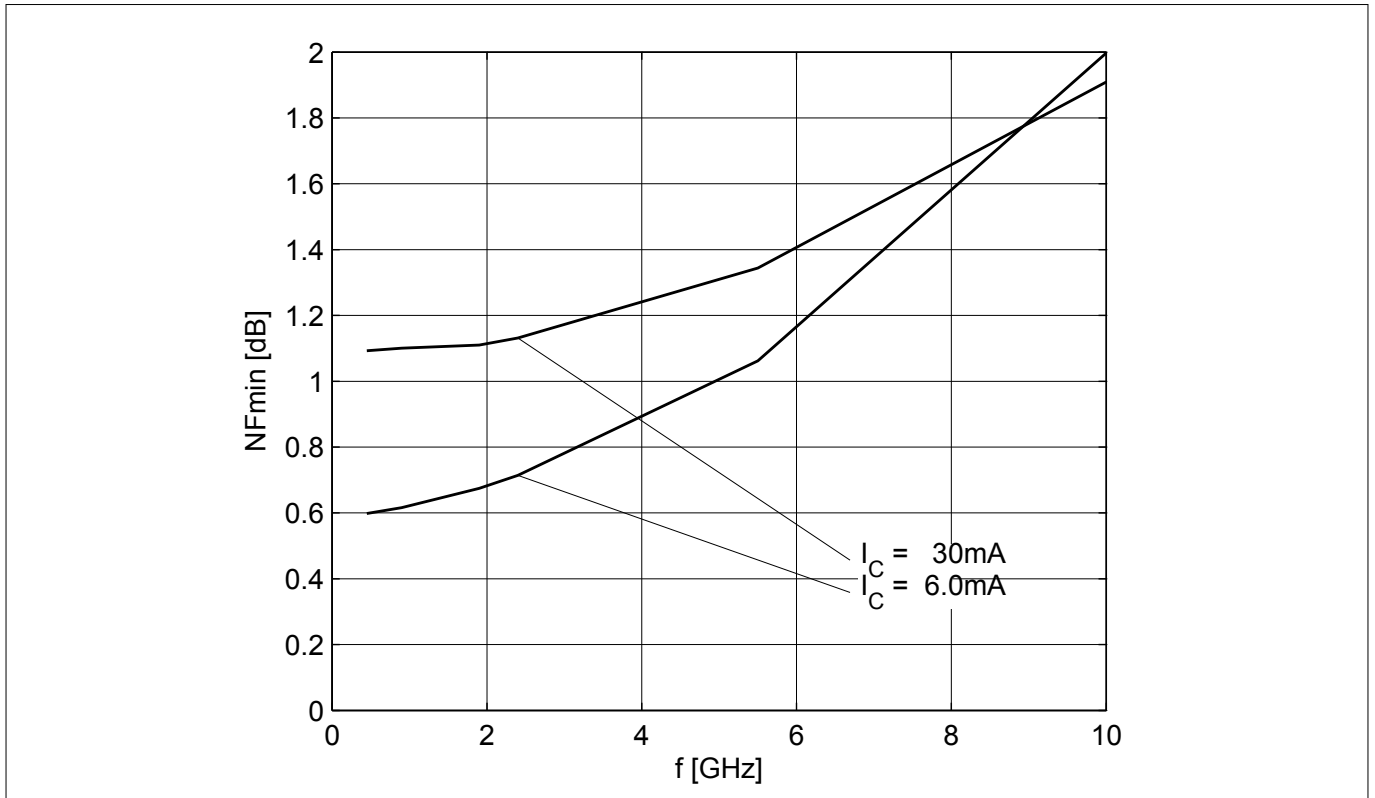


**Figure 17** Noise figure  $NF_{min} = f(f)$ ,  $Z_S = Z_{S,opt}$ ,  $V_{CE} = 3\text{ V}$ ,  $I_C = 6 / 30\text{ mA}$

**Electrical characteristics**

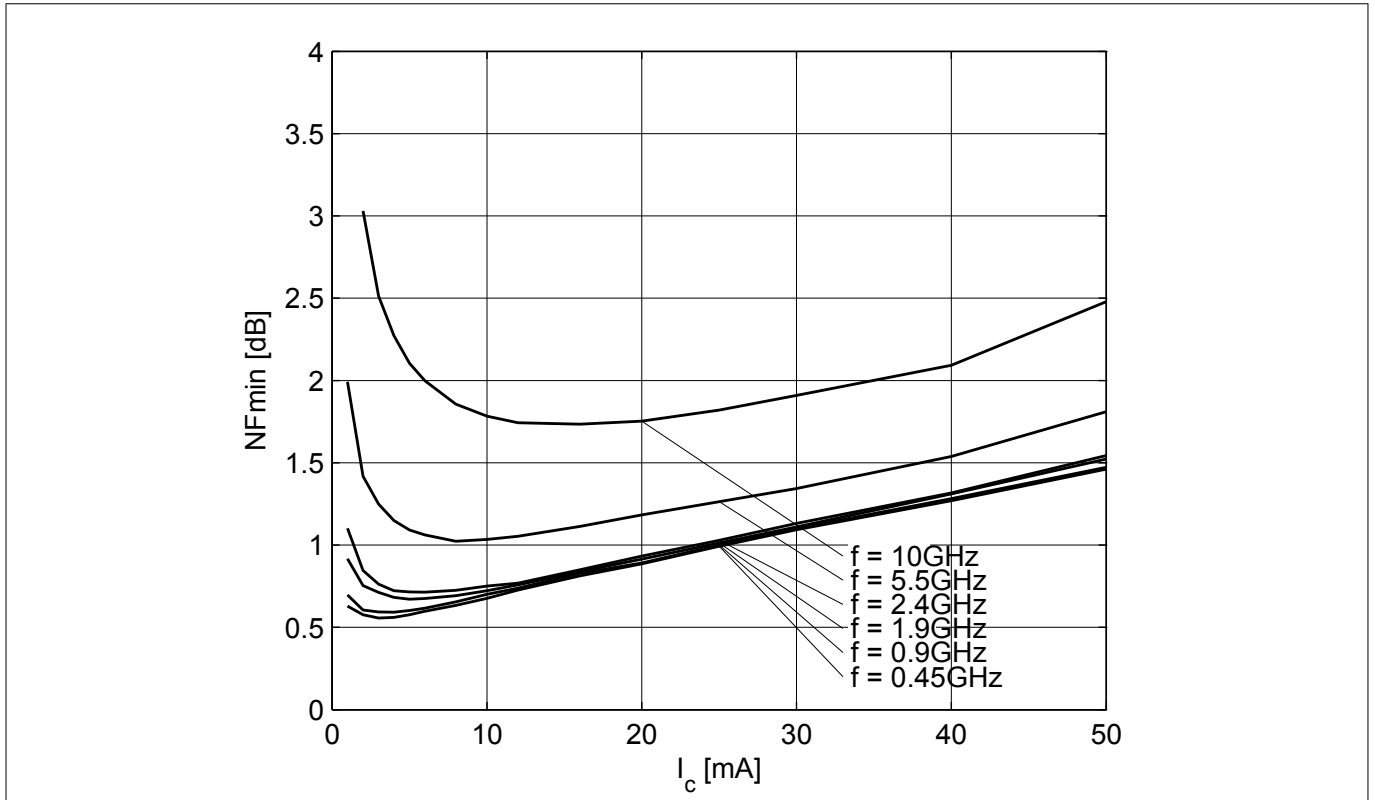

**Figure 18** Noise figure  $NF_{min} = f(I_C), Z_S = Z_{S,opt}, V_{CE} = 3\text{ V}, f = \text{parameter in GHz}$

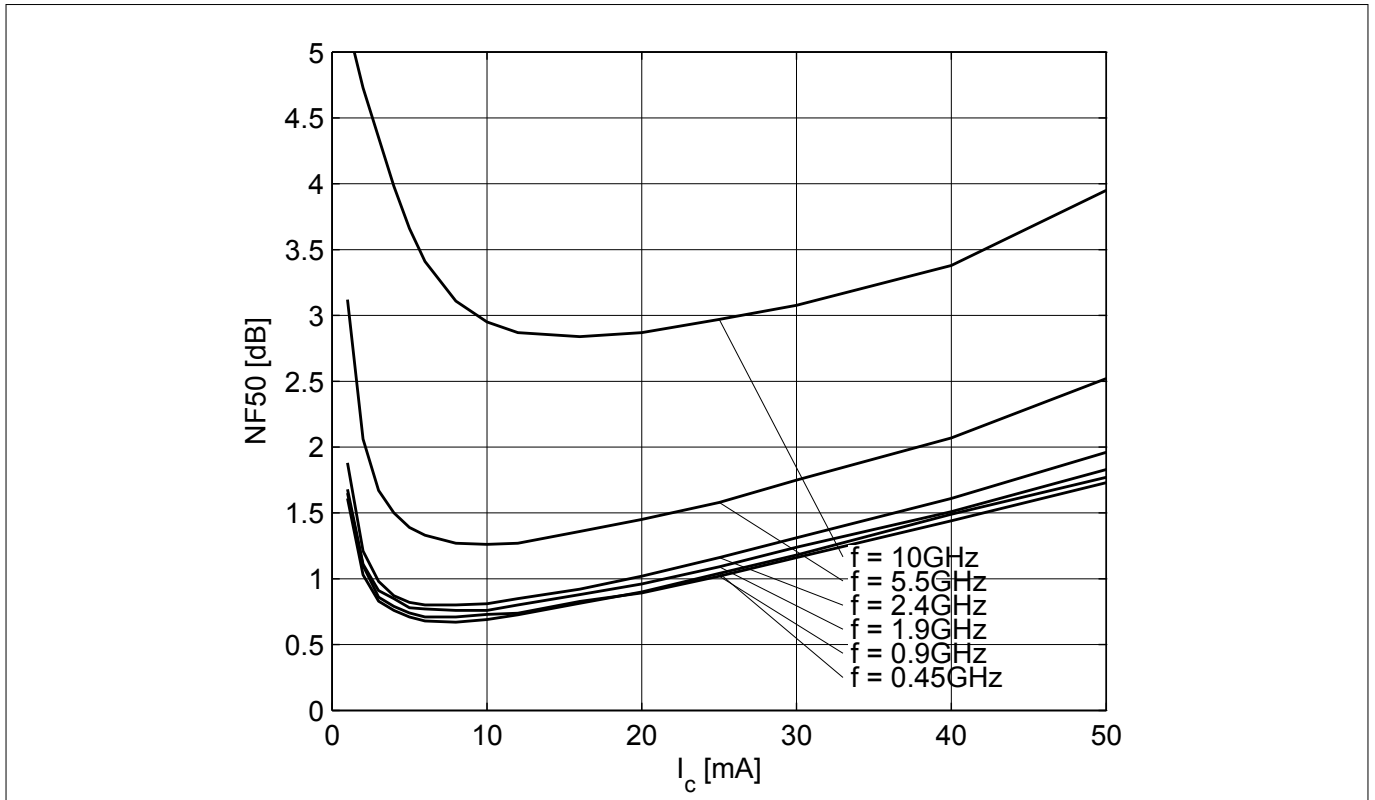


**Figure 19** Noise figure  $NF_{50} = f(I_C), Z_S = 50\ \Omega, V_{CE} = 3\text{ V}, f = \text{parameter in GHz}$


*Note:* The curves shown in this chapter have been generated using typical devices but shall not be considered as a guarantee that all devices have identical characteristic curves.  $T_A = 25\text{ }^\circ\text{C}$ .

**Package information SOT343**


**4 Package information SOT343**

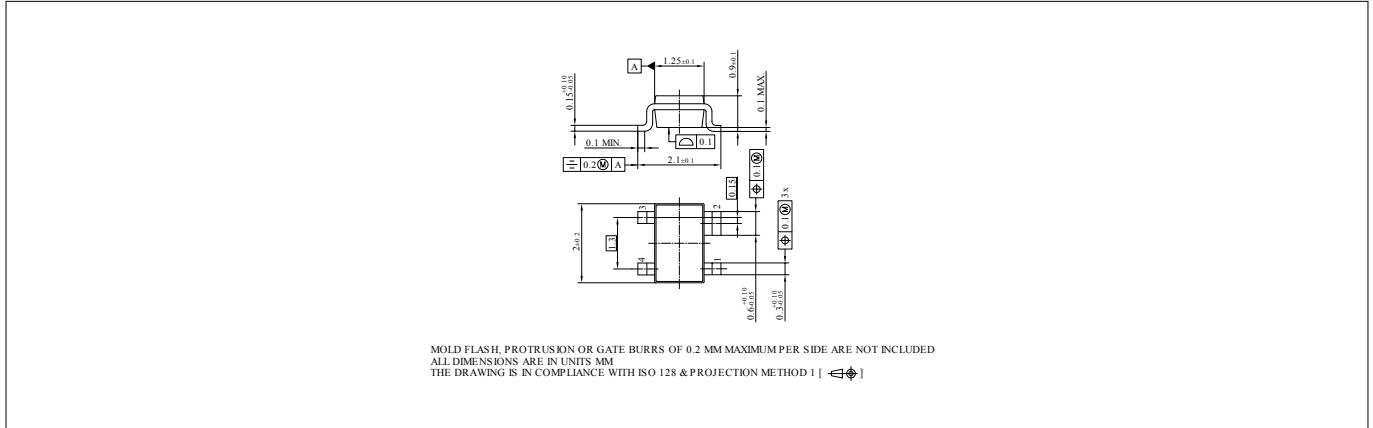


**Figure 20 Package outline**

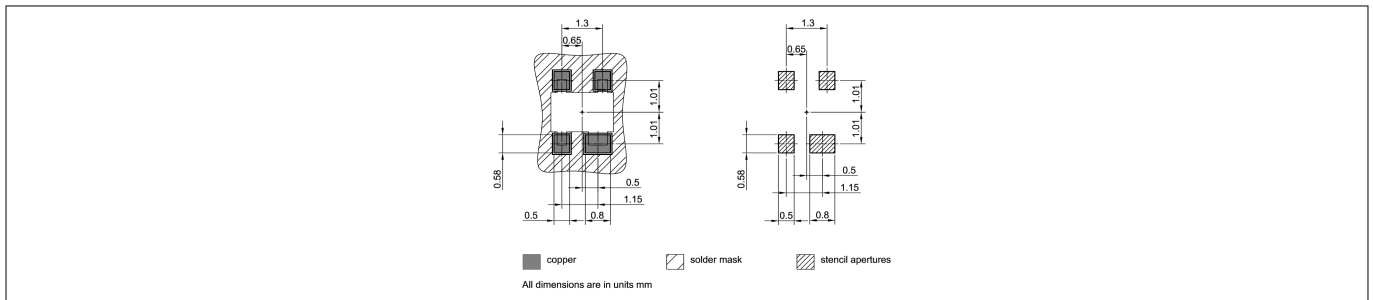

**Figure 21 Foot print**

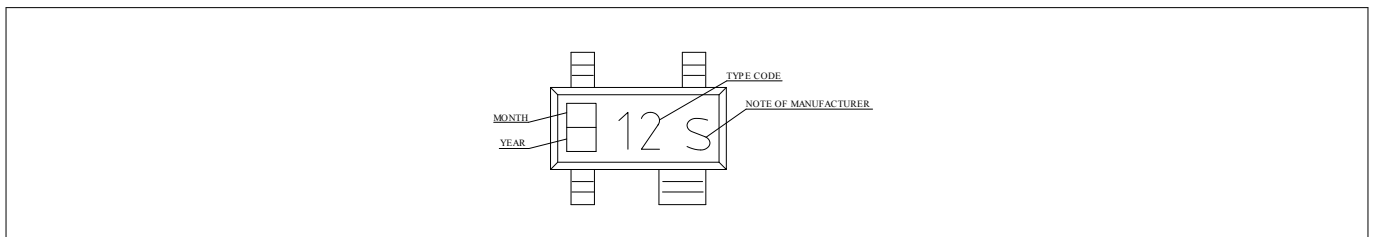

**Figure 22 Marking layout example**

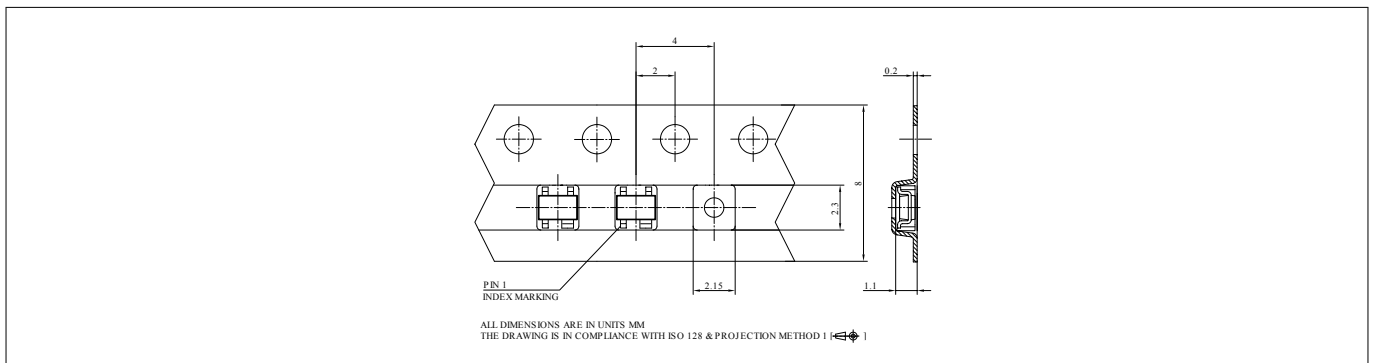

**Figure 23 Tape dimensions**

---

Revision history

## Revision history

| Document version | Date of release | Description of changes |
|------------------|-----------------|------------------------|
| Revision 2.0     | 2019-01-25      | New datasheet layout.  |

## Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2019-01-25**

**Published by  
Infineon Technologies AG  
81726 Munich, Germany**

**© 2019 Infineon Technologies AG  
All Rights Reserved.**

**Do you have a question about any  
aspect of this document?  
Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**Document reference  
IFX-gxy1526293410079**

## IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

## WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury

单击下面可查看定价，库存，交付和生命周期等信息

[>>Infineon\(英飞凌\)](#)