High Voltage MLC Chip Capacitors







Modern automotive electronics could require components capable to work with high voltage (e.g. xenon lamp circuits or power converters in hybrid cards). AVX offers high voltage ceramic capacitors qualified according to AEC-Q200 standard.


High value, low leakage and small size are diffocult parameters to obtain in cpacitors for high voltage systems. AVX special hgih voltage MLC chip capacitors meet these performance characteristics and are designed for applications such as snubbers in high frequency power converters, resonators in SMPS, and high voltage coupling/dc blocking. These high voltage chip designs exhibit low ESRs at high frequencies.



Due to high voltage nature, larger physical dimensions are necessary. These larger sizes require special precautions to be taken in applying of MLC chips. The temperature gradient during heating or cooling cycles should not exceed 4°C per second. The preheat temperature must be within 50°C of the peak temperature reached by the ceramic bodies through the soldering process. Chip sizes 1210 and larger should be reflow soldered only. Capacitors may require protective surface coating to prevent external arcing.


To improve mechanical and thermal resistance, AVX recommend to use flexible terminations system - FLEXITERM®.

HOW TO ORDER

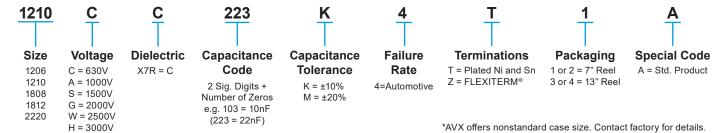

Notes: Capacitors with X7R dielectrics are not indeded for applications across AC supply mains or AC line filtering with polarity reversal. Please contact AVX for recommendations

CHIP DIMENSIONS DESCRIPTION (See capacitance range chart on page 109)



L = Length W = Width T = Thickness t = Terminal

X7R DIELECTRIC PERFORMANCE CHARACTERISTICS

Parameter/Test	Specification Limits	Measuring Conditions						
Operating Temperature Range	-55°C to +125°C	Temperature Cycle Chamber						
Capacitance Dissipation Factor Capacitance Tolerance	within specified tolerance 2.5% max. ±5% (J), ±10% (K), ±20% (M)	Freq.: 1kHz ±10% Voltage: 1.0Vrm s ±0.2Vrms T = +25°C, V = 0Vdc						
Temperature Characteristics	X7R = ±15%	Vdc = 0V, T = (-55°C to +125°C						
Insulation Resistance	100GΩ min. or 1000MΩ • μF min. (whichever is less) 10GΩ min. or 100MΩ • μF min. (whichever is less)	T = +25°C, V = 500Vdc T = +125°C, V = 500Vdc (t ≥ 120 sec, I ≤ 50mA)						
Dielectric Strength	No breakdown or visual defect	120% of rated voltage t ≤ 5 sec, I ≤ 50mA						



High Voltage MLC Chips FLEXITERM® For 600V to 3000V Automotive Applications – AEC-Q200

X7R CAPACITANCE RANGE **PREFERRED SIZES ARE SHADED**

Solde (L) Length	oring		CaseSize 1206				1210				1808							1812								2220					
(L) Length	Soldering Reflow/Wave						Reflo			ReflowOnly							ReflowOnly								ReflowOnly						
(L) Longin	mr (in	m i.)	3.20 ± 0.20 (0.126 ± 0.008)					3.20 ± 0.20 (0.126 ± 0.008)				4.57 ± 0.25 (0.180 ± 0.010)							4.50 ± 0.30 (0.177 ± 0.012)							5.70 ± 0.40 (0.224 ± 0.016)					
(W) Width	mr (in				60 ± 0.2 63 ± 0.0			2.50 ± 0.20 (0.098 ± 0.008)				2.03 ± 0.25 (0.080 ± 0.010)							3.20 ± 0.20 (0.126 ± 0.008)							5.00 ± 0.40 (0.197 ± 0.016)					
(T) Thickness	mr (in	m i.)			1.52 (0.060)			1.70 (0.067)				2.03 (0.080)							2.54 (0.100)						3.30 (0.130)						
(t)Terminal	mi ma		0.25 (0.010) 0.75 (0.030)					0.25 (0.010) 0.75 (0.030)				0.25 (0.010) 1.02 (0.040)							0.25 (0.010) 1.02 (0.040)							0.25 (0.010) 1.02 (0.040)					
Voltage(V)			630		1500 2000 1		2500	630			2000	630	1000	1500	00 2000	2500	3000	630	1000				3000	4000	630		1500		3000		
Cap (pF)	100	101																											\vdash		
	120	121																										<u> </u>	—		
	150	151																										<u> </u>	⊢		
	180	181																										<u> </u>			
	220	221																										<u> </u>	-		
	270	271 331																										<u> </u>	├		
	330 390	391																											-		
	470	471																											_		
——	560	561																										\vdash			
	680	681																							_			\vdash	\vdash		
	820	821																										\vdash	\vdash		
	1000	102																													
	1200	122																											_		
	1500	152																													
	1800	182																													
	2200	222																													
	2700	272																													
	3300	332																													
	3900	392																													
	4700	472																													
	5600	562																													
	6800	682																													
	8200	822																													
Cap (µF)	0.01	103																													
- 1 (1 /	0.012	123																													
	0.015	153													ĺ																
	0.018	183																				İ									
	0.022	223																													
	0.027	273																													
	0.033	333																													
	0.039	393																													
	0.047	473																													
	0.056	563																													
	0.068	683																													
	0.082	823																										\Box			
	0.100	104																													
	0.120	124							$oxed{oxed}$		\sqcup												<u> </u>					<u> </u>			
Voltad	0.150 ige(V)	154	630	1000	1500	2000	2500	630	1000	1500	2000	630	1000	1500	2000	2500	3000	630	1000	1500	2000	2500	3000	4000	630	1000	1500	2000	3000		
CaseSize 1206				- 555	1210								3000	630 1000 1500 2000 2500 3000 4000 1812							2220										

NOTE: Contact factory for non-specified capacitance values

单击下面可查看定价,库存,交付和生命周期等信息

>>AVX

>>点击查看相关商品