

GENERAL PURPOSE APPLICATION.
SWITCHING APPLICATION.



FEATURES

- Low Leakage Current
: $I_{CEX}=50nA(\text{Max.}), I_{BL}=50nA(\text{Max.})$
@ $V_{CE}=30V, V_{EB}=3V$.
- Excellent DC Current Gain Linearity.
- Low Saturation Voltage
: $V_{CE(\text{sat})}=0.3V(\text{Max.})$ @ $I_C=50mA, I_B=5mA$.
- Low Collector Output Capacitance
: $C_{ob}=4pF(\text{Max.})$ @ $V_{CB}=5V$.
- Complementary to 2N3906S.

MAXIMUM RATING ($T_a=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	60	V
Collector-Emitter Voltage	V_{CEO}	40	V
Emitter-Base Voltage	V_{EBO}	6	V
Collector Current	I_C	200	mA
Base Current	I_B	50	mA
Collector Power Dissipation	P_C^*	350	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

* P_C : Package Mounted On 99.5% Alumina $10 \times 8 \times 0.6\text{mm}$

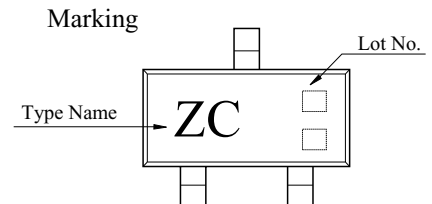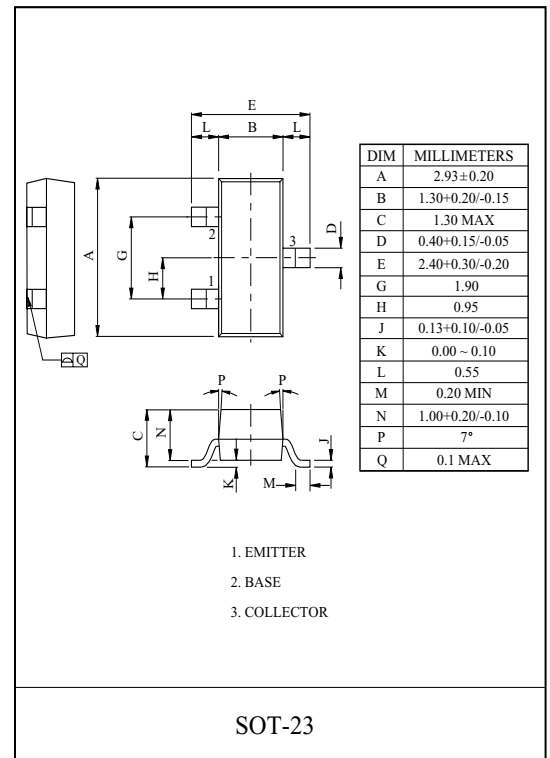

2N3904S


ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Collector Cut-off Current		I_{CEX}	$V_{CE}=30V, V_{EB}=3V$	-	-	50	nA	
Base Cut-off Current		I_{BL}	$V_{CE}=30V, V_{EB}=3V$	-	-	50	nA	
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	60	-	-	V	
Collector-Emitter Breakdown Voltage *		$V_{(BR)CEO}$	$I_C=1mA, I_B=0$	40	-	-	V	
Emitter-Base Breakdown Voltage		$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	6.0	-	-	V	
DC Current Gain	*	$h_{FE(1)}$	$V_{CE}=1V, I_C=0.1mA$	40	-	-		
		$h_{FE(2)}$	$V_{CE}=1V, I_C=1mA$	70	-	-		
		$h_{FE(3)}$	$V_{CE}=1V, I_C=10mA$	100	-	300		
		$h_{FE(4)}$	$V_{CE}=1V, I_C=50mA$	60	-	-		
		$h_{FE(5)}$	$V_{CE}=1V, I_C=100mA$	30	-	-		
Collector-Emitter Saturation Voltage *	*	$V_{CE(sat)1}$	$I_C=10mA, I_B=1mA$	-	-	0.2	V	
		$V_{CE(sat)2}$	$I_C=50mA, I_B=5mA$	-	-	0.3		
Base-Emitter Saturation Voltage *	*	$V_{BE(sat)1}$	$I_C=10mA, I_B=1mA$	0.65	-	0.85	V	
		$V_{BE(sat)2}$	$I_C=50mA, I_B=5mA$	-	-	0.95		
Transition Frequency		f_T	$V_{CE}=20V, I_C=10mA, f=100MHz$	300	-	-	MHz	
Collector Output Capacitance		C_{ob}	$V_{CB}=5V, I_E=0, f=1MHz$	-	-	4.0	pF	
Input Capacitance		C_{ib}	$V_{BE}=0.5V, I_C=0, f=1MHz$	-	-	8.0	pF	
Input Impedance		h_{ie}	$V_{CE}=10V, I_C=1mA, f=1kHz$	1.0	-	10	k	
Voltage Feedback Ratio		h_{re}		0.5	-	8.0	$\times 10^{-4}$	
Small-Signal Current Gain		h_{fe}		100	-	400		
Collector Output Admittance		h_{oe}		1.0	-	40	μ	
Noise Figure		NF		$V_{CE}=5V, I_C=0.1mA, R_g=1k\Omega, f=10Hz \sim 15.7kHz$	-	-	5.0	dB
Switching Time	Delay Time	t_d		-	-	35	nS	
	Rise Time	t_r		-	-	35		
	Storage Time	t_{stg}			-	-		200
	Fall Time	t_f			-	-		50


* Pulse Test : Pulse Width 300 μ s, Duty Cycle 2%.

2N3904S


$I_C - V_{CE}$

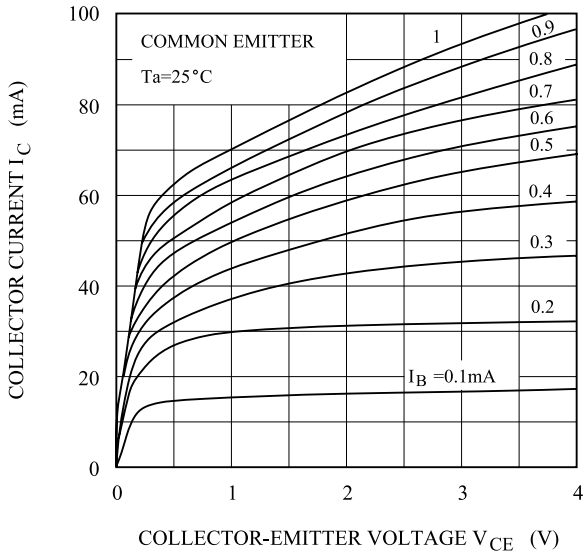


$h_{FE} - I_C$

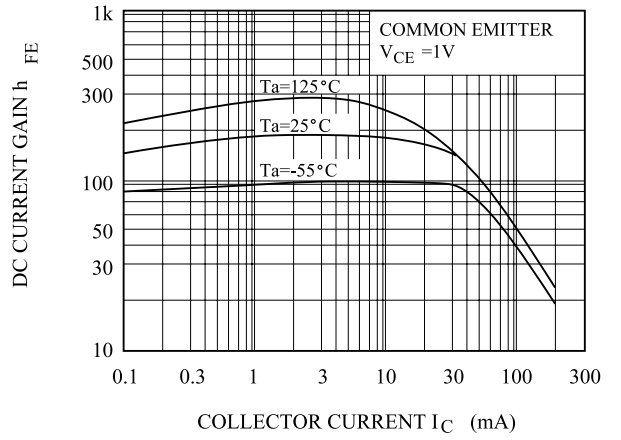


$I_C - V_{BE}$

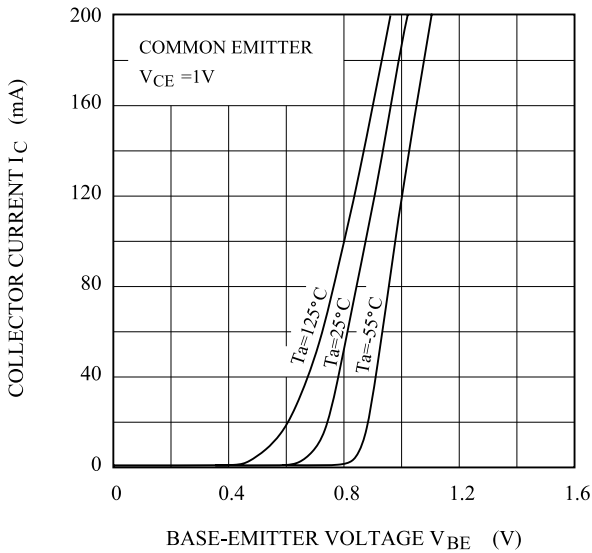



$V_{CE(sat)} - I_C$

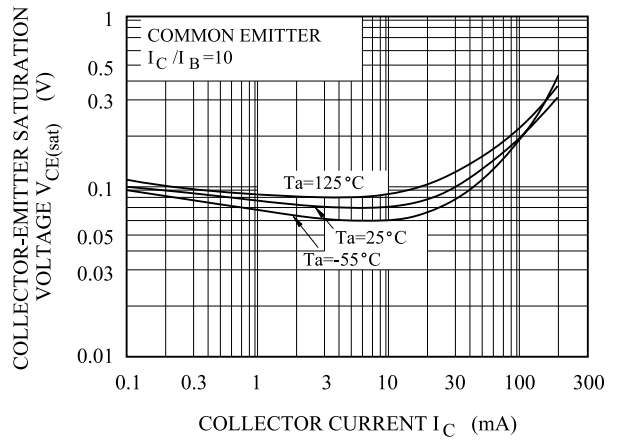

$V_{BE(sat)} - I_C$

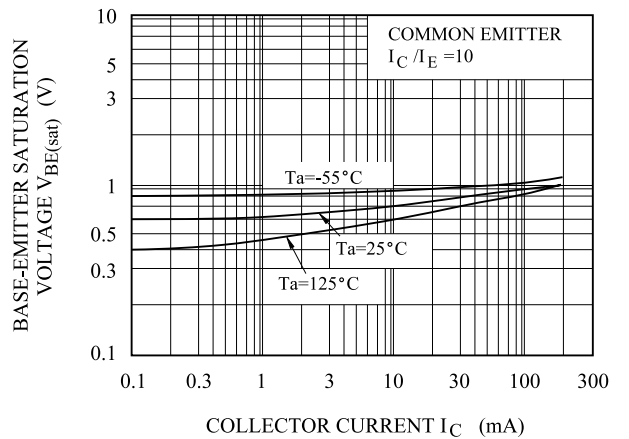

2N3904S

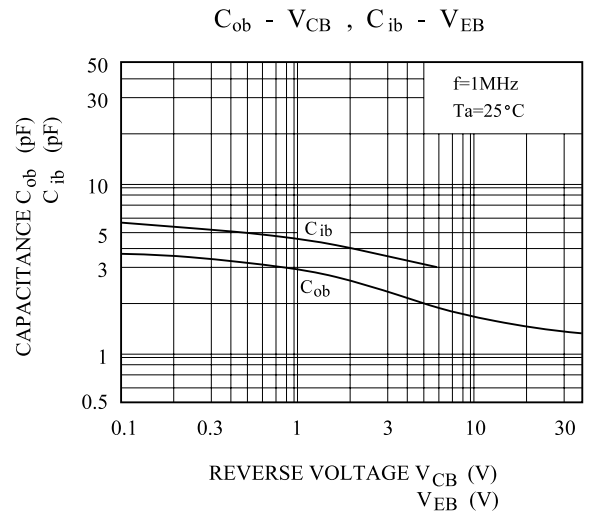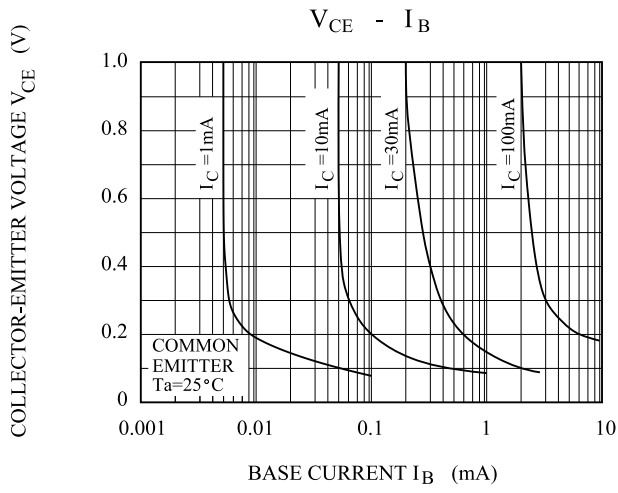

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEC\(开益禧\)](#)