

# AUTOMOTIVE CURRENT TRANSDUCER

## HAB 60-S/SP5



### Introduction

The HAB Family is best suited for DC, AC or pulsed currents measurement in high power and low voltage automotive applications. It contains galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).

The HAB family gives you a choice of having different current measuring ranges in the same housing (from  $\pm 20$  A up to  $\pm 100$  A).

### Features

- Open Loop transducer using the Hall effect sensor
- Low voltage application
- Unipolar + 5 V DC power supply
- Primary current measuring range  $\pm 60$  A
- Maximum rms primary current limited by the busbar, the magnetic core or the ASIC temperature  $T^\circ < + 150^\circ\text{C}$
- Operating temperature range:  $- 40^\circ\text{C} < T^\circ < + 125^\circ\text{C}$
- Output voltage: full ratio-metric (in gain and offset).

### Advantages

- Good accuracy for high and low current range
- Good linearity
- Low thermal offset drift
- Low thermal gain drift
- Hermetic package.


### Automotive applications

- Battery Pack Monitoring
- Hybrid Vehicles
- EV and Utility Vehicles.

### Principle of HAB xxx-S Family

The transducer uses open loop hall effect technology. It provides a **Pulse Width Modulated** output Signal proportional to the magnetic Induction B generated by the primary current  $I_p$  to be measured.

The **PWM** principle is described as follow:

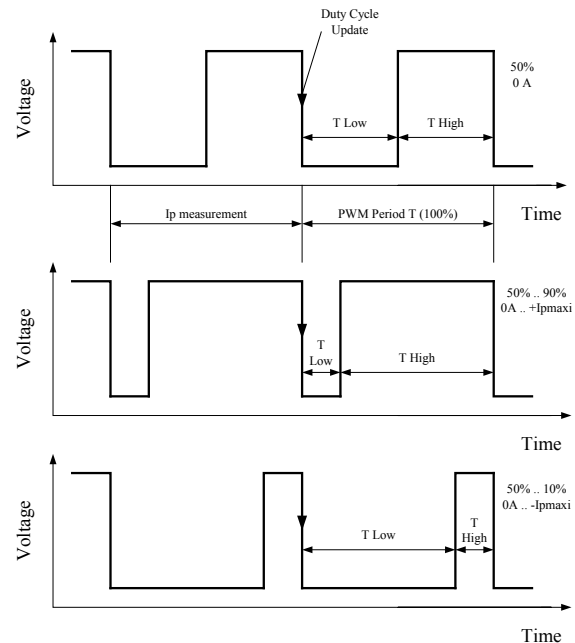

$$PWM \text{ period } T_{Period} = T_{High} + T_{Low}$$

$$PWM \text{ frequency} = \frac{1}{T_{Period}} = 125 \text{ Hz}$$


$$DutyCycle(\%) = \frac{T_{High}}{T_{Period}} \times 100$$

$$DutyCycle(\%) = 50\% + G \times I_p \text{ with } G = \text{Sensitivity } (\%/A)$$

The **PWM** period  $T_{period}$  starts on the falling edge of the output signal. The output signal of the duty cycle given during the  $T_{period}$  is the image of the primary current during the  $T_{period} - 1$  period.


# HAB 60-S/SP5

## Dimensions HAB 60-S/SP5 family (in mm.)

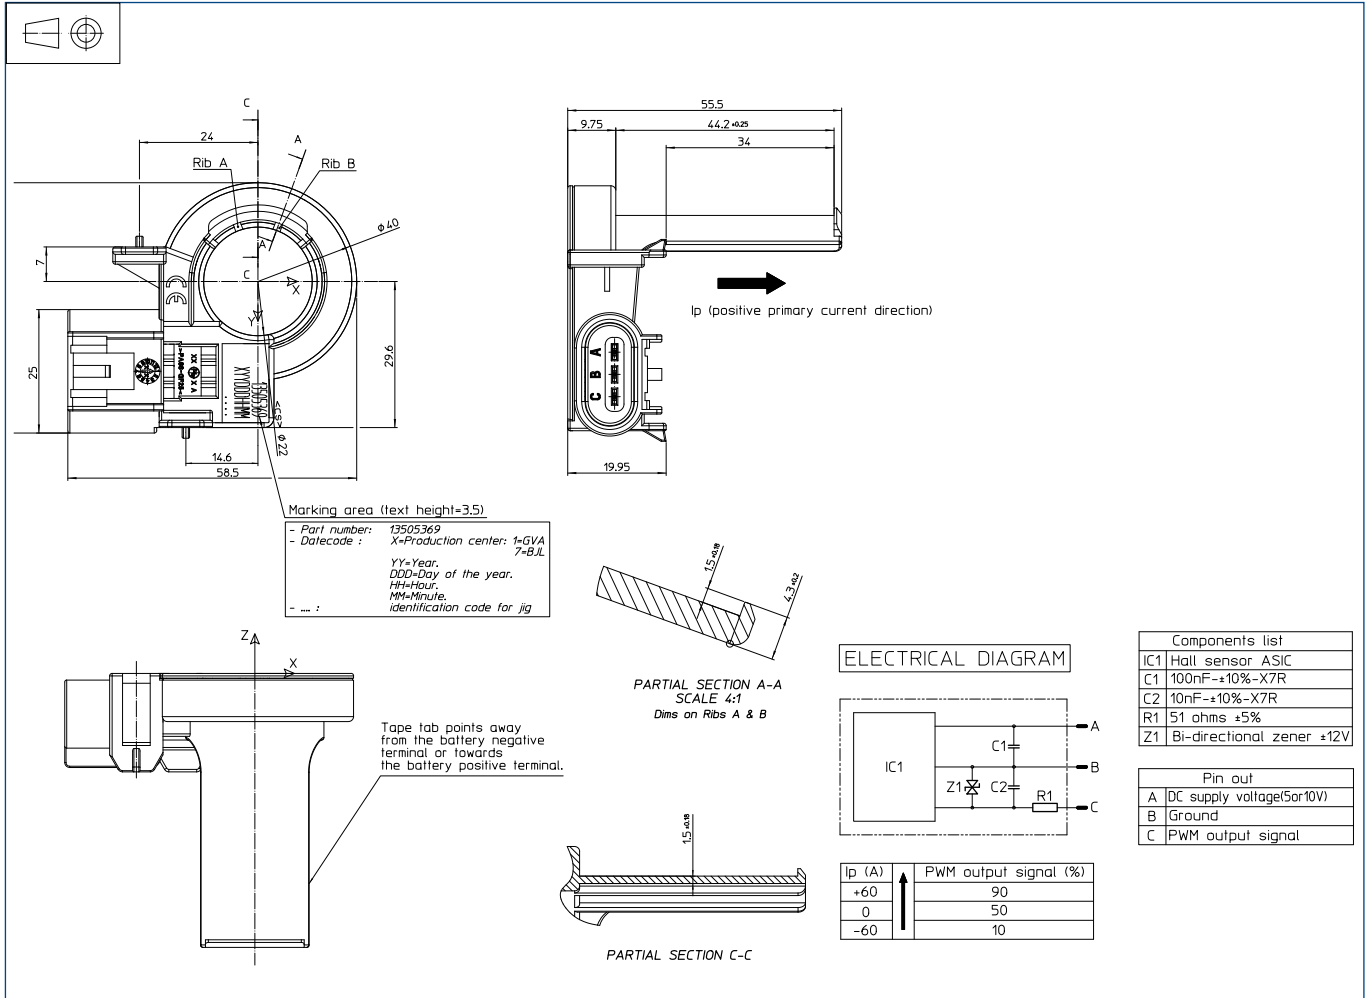

### Bill of materials

- Plastic case PA 66-GF25
- Pins Brass tin plated
- *m* 25 g

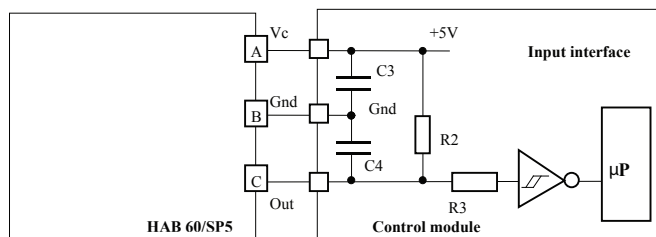

| Control module components |                           |          |
|---------------------------|---------------------------|----------|
| C3                        | 100 nF                    | X7R      |
| C4                        | 1 nF                      | X7R      |
| R2                        | 4.7 kΩ                    | Optional |
| R3                        | High impedance protection | Optional |

The optional components are needed if current sensor is outside the control module circuit.

## HAB 60-S/SP5

### Absolute maximum ratings (not operating)

| PARAMETER                                 | Symbol          | Min   | Max      | Unit |
|---|-----------------|-------|----------|------|
| Maximum primary current                   | $I_P$           |       | Infinite | A    |
| Supply voltage                            | $V_C$           | - 8.5 | 8.5      | V    |
| Supply voltage (over voltage $t < 1$ min) |                 | - 14  | 14       | V    |
| Current consumption ( $t < 1$ min)        | $I_C$           |       | 50       | mA   |
| Output voltage ( $t < 1$ min)             | $V_{out}$       | - 5   | 14       | V    |
| Output voltage over supply voltage        | $V_{out} - V_C$ |       | 2        | V    |
| Output current                            | $I_{out}$       | - 10  | 10       | mA   |
| Output short-circuit duration             | $T_c$           |       | 10       | min  |
| Ambiant storage temperature               | $T_S$           | - 40  | 125      | °C   |

### Operating conditions

| PARAMETER                                      | Symbol | Min  | Typical | Max  | Unit       |
|--|--------|------|---------|------|------------|
| Supply voltage                                 | $V_C$  | 4.5  | 5.00    | 5.5  | V          |
| Supply voltage (accurate range)                | $V_C$  | 4.75 | 5.00    | 5.25 | V          |
| Pull up load resistor                          | $R_L$  | 2.2  | 4.7     |      | K $\Omega$ |
| Capacitive loading                             | $C_L$  |      |         | 1    | nF         |
| Ambient operation temperature                  | $T_A$  | - 40 | 25      | 125  | °C         |
| Ambient operation temperature (accurate range) | $T_A$  | - 10 | 25      | 65   | °C         |

### Operating characteristics

| PARAMETER                                       | Symbol     | Min         | Typical | Max | Unit     |
|---|------------|-------------|---------|-----|----------|
| Primary current nominal range                   | $I_{PN}$   | -60         |         | 60  | A        |
| Maximum current measuring range (clamping)      | $I_{PM}$   | -67         |         | 67  | A        |
| Current consumption                             | $I_C$      | -           | 7.5     | 10  | mA       |
| Output PWM frequency                            | $f_{PWM}$  | 105         | 125     | 145 | Hz       |
| Output duty cycle sensitivity                   | $G$        |             | 0.667   |     | %/A      |
| Output duty cycle @ $I_p = 0$                   | $D_{OUT}$  |             | 50      |     | %        |
| Output duty clamping low                        |            | 4           | 5       | 6   | %        |
| Output duty clamping high                       |            | 94          | 95      | 96  | %        |
| Duty cycle resolution                           |            |             | 0.0125  |     | %        |
| Power-up time to reach valid duty cycle         |            |             |         | 25  | ms       |
| Setting time after over load                    |            |             |         | 25  | ms       |
| Output voltage high (pull up = 4.7 K $\Omega$ ) | $V_{OUTH}$ | $V_C - 0.2$ |         |     | V        |
| Output voltage low (pull up = 4.7 K $\Omega$ )  | $V_{OUTL}$ |             |         | 0.2 | V        |
| Output internal resistance                      | $R_{out}$  |             | 50      | 100 | $\Omega$ |
| Output PWM rise time                            | $t_{rise}$ |             |         | 10  | $\mu$ s  |
| Output PWM fall time                            | $t_{fall}$ |             |         | 10  | $\mu$ s  |


## HAB 60-S/SP5

### Operating temperature

| PARAMETER  | Symbol          | Min  | Typical | Max | Unit |
|--|-----------------|------|---------|-----|------|
| Electric offset current @ accurate temperature range | $I_{OE}$        | -0.2 | 0.075   | 0.2 | A    |
| Electric offset current @ full temperature range     |                 | -0.3 | 0.15    | 0.3 | A    |
| Magnetic offset current                              | $I_{OM}$        |      | 0.05    |     | A    |
| Output resolution                                    |                 |      | 0.03    |     | A    |
| Sensitivity error @ accurate temperature range       | $\varepsilon_G$ | -2   |         | 2   | %    |
| Sensitivity error @ full temperature range           |                 | -3   |         | 3   | %    |
| Linearity error                                      | $\varepsilon_L$ |      | 0.2     |     | %    |

## HAB 60-S/SP5

### Operating temperature

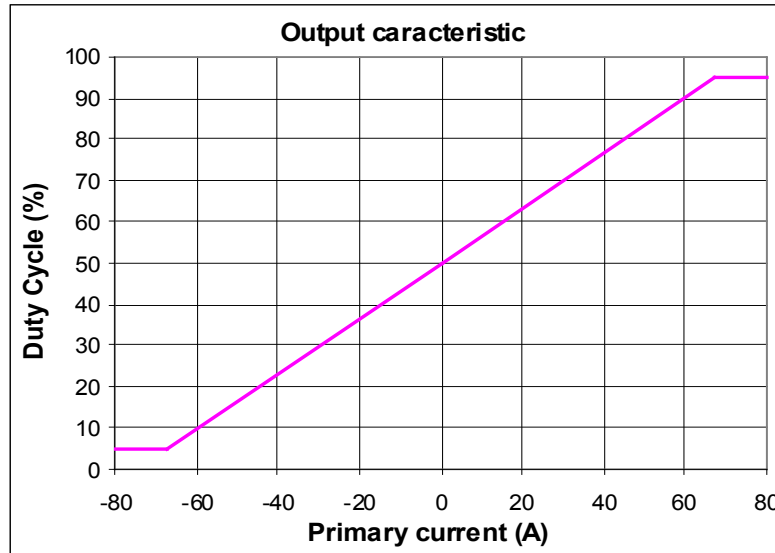


### Influence of the external magnetic field


Test conditions:

- transducer sample: HAB 60-S
- diameter of the disturbing conductor: 6 mm
- dimension of the primary bus-bar: 6 x 2 x 200 mm
- tested at ambient temperature

### Influence of the external magnetic field

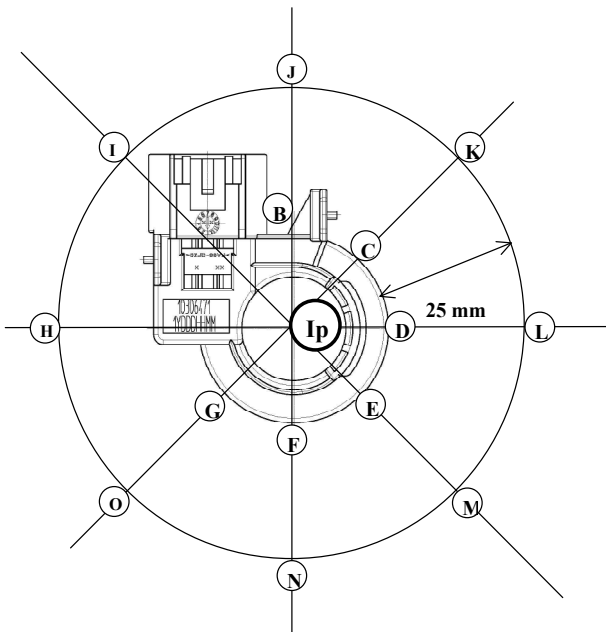

| Position  | curve 1 | curve 2 | curve 3 | curve 4 | curve 5 | curve 6 |
|-----------|---------|---------|---------|---------|---------|---------|
| $I_p$ (A) | 0       | 0       | -60     | -60     | 60      | 60      |
| $I_x$ (A) | 60      | -60     | 60      | -60     | 60      | -60     |

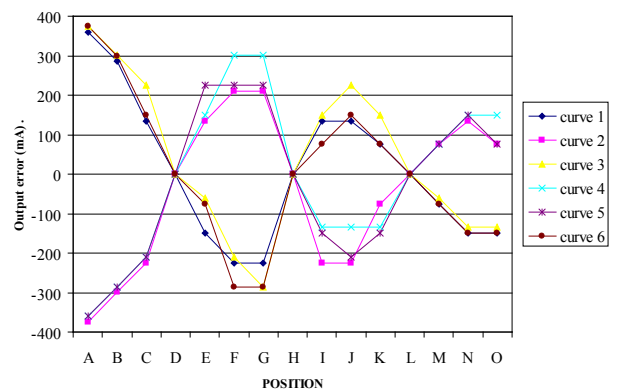

单击下面可查看定价，库存，交付和生命周期等信息

[>>LEM\(莱姆\)](#)