



# FS200 SERIES



## Wiring Diagram

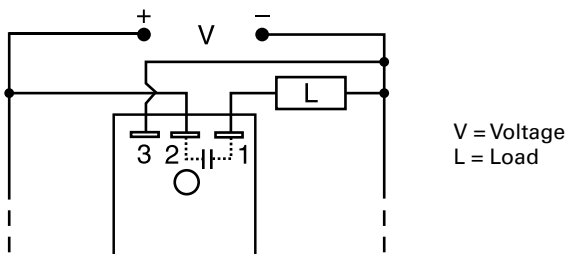

## Description

The FS200 Series may be used to control inductive, incandescent, or resistive loads. Factory fixed flash rate of 45 or 90 FPM or may be ordered with a fixed custom flash rate ranging from 10 to 180 FPM. Encapsulation provides protection against shock, vibration, and humidity. Uniform performance, high inrush current capability, and low RFI, make this series ideal for general industrial applications.

### Operation

Upon application of input voltage, the T2 OFF time begins. At the end of the OFF time, the T1 ON time begins and the load energizes. At the end of T1, T2 begins and the load de-energizes. This cycle repeats until input voltage is removed.

**Reset:** Removing input voltage resets the output and the sequence to T2.

## Features & Benefits

FEATURES	BENEFITS
<b>3A steady, 30A inrush, SPST output contact</b>	Provides direct control of inductive, incandescent, or resistive loads
<b>Totally solid state and encapsulated</b>	No moving parts to arc and wear out over time and encapsulated to protect against shock, vibration, and humidity
<b>High inrush current capability and low RFI</b>	Ideal for general industrial applications

## Accessories



### P1023-6 Mounting bracket

The 90° orientation of mounting slots makes installation/removal of modules quick and easy.



### P1015-64 (AWG 14/16) Female Quick Connect

These 0.25 in. (6.35 mm) female terminals are constructed with an insulator barrel to provide strain relief.



### P1015-18 Quick Connect to Screw Adapter

Screw adapter terminal designed for use with all modules with 0.25 in. (6.35 mm) male quick connect terminals.



### C103PM (AL) DIN Rail

35 mm aluminum DIN rail available in a 36 in. (91.4 cm) length.



### P1023-20 DIN Rail Adapter

Allows module to be mounted on a 35 mm DIN type rail with two #10 screws.

## Ordering Information

MODEL	INPUT	RATING	FLASH RATE
FS219-45	12VDC ± 20%	3A	45 FPM
FS224	24VDC ± 20%	3A	90 FPM

If you don't find the part you need, call us for a custom product 800-843-8848


# FS200 SERIES

## Specifications

### Technical Data

<b>Operation</b>	OFF/ON solid-state flasher (continuous duty)
<b>Flash Rate</b>	Fixed at 90 FPM $\pm 10\%$
<b>Custom Flash Rate</b>	10 - 180 FPM
<b>ON/OFF Ratio</b>	$\approx 50\%$
<b>Input</b>	
<b>Voltage</b>	12, 24, 36, 48, or 110VDC
<b>Output</b>	
<b>Load Type</b>	Inductive, resistive, or incandescent
<b>Maximum Load Rating</b>	0.25 - 3A steady state
<b>OFF State Leakage Current</b>	
<b>12 &amp; 24VDC</b>	$\leq 250 \mu\text{A}$
<b>Inrush</b>	10 times steady state current
<b>Mechanical</b>	
<b>Mounting</b>	Surface mount with one #10 (M5 x 0.8) screw
<b>Dimensions</b>	<b>H</b> 50.8 mm (2"); <b>W</b> 50.8 mm (2"); <b>D</b> 30.7 mm (1.21")
<b>Termination</b>	0.25 in. (6.35 mm) male quick connect terminals
<b>Protection</b>	
<b>Circuitry</b>	Encapsulated
<b>Environmental</b>	
<b>Operating/Storage Temperature</b>	-20° to 60°C / -40° to 85°C
<b>Weight</b>	$\approx 2.2 \text{ oz (62 g)}$

## Flasher Function Diagram

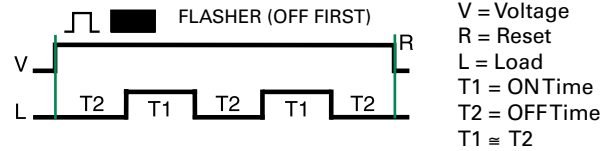

单击下面可查看定价，库存，交付和生命周期等信息

[>>Littelfuse\(美国力特\)](#)