

## 3-Terminal 1A Positive Voltage Regulator


### Description

The LRC LR78XXE family is monolithic fixed voltage regulator integrated circuit. They are suitable for applications that required supply current up to 1 A.

### Features

- Output current up to 1A
- Fixed output voltage of 5V, 6V, 7V, 8V,9V,10V, 12V, 15V ,18V and 24V available
- Thermal overload shutdown protection
- Short circuit current limiting
- We declare that the material of product complies with RoHS requirements.

## LR78XXE

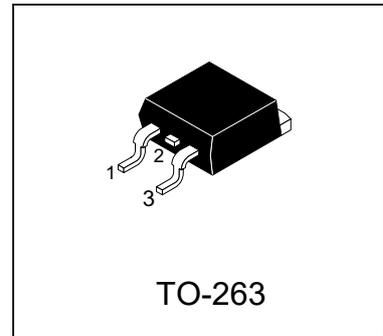


1. Input 2. GND 3. Output


### ORDERING INFORMATION

DEVICE	Package	XX Description	Packing Information
LR78XXE	TO-263	Output Voltage e.g. 12.0V=12 5.0V=05	800 Units/ Reel


### DEVICE MARKING INFORMATION

Marking	First Column Description (L7805E)	Second Column Description (YYWW)
	Device Code L7805E is the Device Code for LR7805E	Year and Week Code e.g. "1936" represent "The 36th week of 2019"

### APPLICATION CIRCUIT

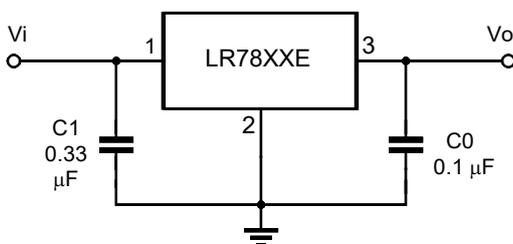

### BLOCK DIAGRAM

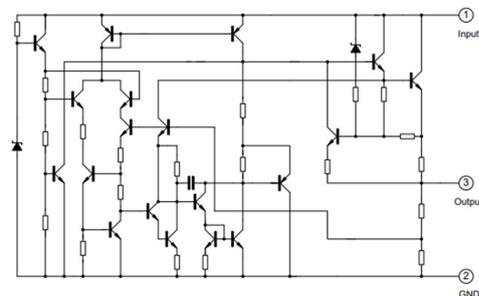

Note 1: To specify an output voltage, substitute voltage value for "XX".

Note 2: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

**Absolute Maximum Ratings (Ta=25°C unless otherwise specified.)**

Parameters	Symbol	Value	Unit
Input Voltage (for V <sub>OUT</sub> = 5~18V)	V <sub>I</sub>	35	V
Output Current	I <sub>O</sub>	1	A
Thermal Resistance Junction-Case (Note1)	R <sub>θJC</sub>	2.5	°C/W
Thermal Resistance Junction-Air (Note1, 2)	R <sub>θJA</sub>	65	°C/W
Operating Junction Temperature Range	T <sub>J</sub>	0 ~ +150	°C
Operating Ambient Temperature	T <sub>OPR</sub>	-40 ~ +125	°C
Storage Temperature Range	T <sub>STG</sub>	-65 ~ +150	°C

**Note:** 1. Thermal resistance test board size: 30.0mm×25.0mm×1.6mm (FR4); Copper foil: 35um; Standard soldering pad.  
2. Assume no ambient airflow

**Electrical Characteristics (LR7805E)**

(I<sub>OUT</sub> = 0.5A, V<sub>IN</sub> = 10V, T<sub>J</sub> = 0°C ~ 125°C, C<sub>I</sub> = 0.33μF, C<sub>O</sub> = 0.1μF, unless otherwise specified.)

Parameters	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	V <sub>O</sub>	T <sub>J</sub> = +25°C	4.8	5	5.2	V
		I <sub>O</sub> = 5mA to 1.0A, P <sub>o</sub> < 15W V <sub>I</sub> = 8V to 20V	4.75	5	5.25	
Line Regulation (Note3)	ΔV <sub>O</sub>	T <sub>J</sub> = 25°C, V <sub>I</sub> = 7.5V to 20V	-	4	100	mV
		T <sub>J</sub> = 25°C, V <sub>I</sub> = 8V to 12V	-	2	50	
Load Regulation (Note3)	ΔV <sub>O</sub>	T <sub>J</sub> = 25°C, I <sub>O</sub> = 5mA to 1.0A	-	9	100	mV
		T <sub>J</sub> = 25°C, I <sub>O</sub> = 250mA to 750mA	-	4	50	
Quiescent Current	I <sub>Q</sub>	T <sub>J</sub> = 25°C	-	4.2	8	mA
Quiescent Current Change	ΔI <sub>Q</sub>	I <sub>O</sub> = 5mA to 1.0A	-	-	0.5	mA
		I <sub>O</sub> = 500mA V <sub>I</sub> = 8V to 25V	-	-	0.8	
Output Voltage Drift	ΔV/ΔT	I <sub>O</sub> = 5mA	-	0.8	-	mV/°C
Output Noise Voltage	V <sub>N</sub>	f = 10Hz to 100kHz	-	42	-	μV/V <sub>O</sub>
Ripple Rejection	RR	f = 120Hz, V <sub>I</sub> = 8V to 18V	62	73	-	dB
Dropout Voltage	V <sub>D</sub>	T <sub>J</sub> = 25°C, I <sub>O</sub> = 1.0A	-	2	-	V
Output Resistance	R <sub>O</sub>	f = 1KHz	-	15	-	mΩ
Short Circuit Current	I <sub>SC</sub>	T <sub>J</sub> = 25°C, V <sub>I</sub> = 35V	-	200	-	mA

### Electrical Characteristics (LR7806E)

( $I_{OUT} = 0.5A$ ,  $V_{IN} = 11V$ ,  $T_J = 0^{\circ}C \sim 125^{\circ}C$ ,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ , unless otherwise specified.)

Parameters	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = +25^{\circ}C$	5.75	6	6.25	V
		$I_O = 5mA$ to 1.0A, $P_o < 15W$ $V_I = 9V$ to 21V	5.65	6	6.25	
Line Regulation (Note3)	$\Delta V_O$	$T_J = 25^{\circ}C$ , $V_I = 8.5V$ to 25V	-	-	120	mV
		$T_J = 25^{\circ}C$ , $V_I = 9V$ to 13V	-	-	60	
Load Regulation (Note3)	$\Delta V_O$	$T_J = 25^{\circ}C$ , $I_O = 5mA$ to 1.0A	-	-	120	mV
		$T_J = 25^{\circ}C$ , $I_O = 250mA$ to 750mA	-	-	60	
Quiescent Current	$I_Q$	$T_J = 25^{\circ}C$	-	4.3	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5mA$ to 1.0A	-	-	0.5	mA
		$I_O = 500mA$ $V_I = 9V$ to 25V	-	-	0.8	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5mA$	-	0.8	-	mV/ $^{\circ}C$
Output Noise Voltage	$V_N$	$f = 10Hz$ to 100kHz	-	42	-	$\mu V/V_o$
Ripple Rejection	RR	$f = 120Hz$ , $V_I = 9V$ to 19V	-	68	-	dB
Dropout Voltage	$V_D$	$T_J = 25^{\circ}C$ , $I_O = 1.0A$	-	2	-	V
Output Resistance	$R_O$	$f = 1KHz$	-	17	-	m $\Omega$
Short Circuit Current	ISC	$T_J = 25^{\circ}C$ , $V_I = 35V$	-	200	-	mA

### Electrical Characteristics (LR7808E)

( $I_{OUT} = 0.5A$ ,  $V_{IN} = 14V$ ,  $T_J = 0^{\circ}C \sim 125^{\circ}C$ ,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ , unless otherwise specified.)

Parameters	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = +25^{\circ}C$	7.84	8	8.16	V
		$I_O = 5mA$ to 1.0A, $P_o < 15W$ $V_I = 11.5V$ to 23V	7.7	8	8.3	
Line Regulation (Note3)	$\Delta V_O$	$T_J = 25^{\circ}C$ , $V_I = 10.5V$ to 25V	-	-	160	mV
		$T_J = 25^{\circ}C$ , $V_I = 11V$ to 17V	-	-	80	
Load Regulation (Note3)	$\Delta V_O$	$T_J = 25^{\circ}C$ , $I_O = 5mA$ to 1.0A	-	-	160	mV
		$T_J = 25^{\circ}C$ , $I_O = 250mA$ to 750mA	-	-	80	
Quiescent Current	$I_Q$	$T_J = 25^{\circ}C$	-	4.3	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5mA$ to 1.0A	-	-	0.5	mA
		$I_O = 500mA$ $V_I = 11.5V$ to 25V	-	-	0.8	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5mA$	-	1.0	-	mV/ $^{\circ}C$
Output Noise Voltage	$V_N$	$f = 10Hz$ to 100kHz	-	42	-	$\mu V/V_o$
Ripple Rejection	RR	$f = 120Hz$ , $V_I = 11.5V$ to 21.5V	-	62	-	dB
Dropout Voltage	$V_D$	$T_J = 25^{\circ}C$ , $I_O = 1.0A$	-	2	-	V
Output Resistance	$R_O$	$f = 1KHz$	-	18	-	m $\Omega$
Short Circuit Current	ISC	$T_J = 25^{\circ}C$ , $V_I = 35V$	-	200	-	mA

### Electrical Characteristics (LR7809E)

( $I_{OUT} = 0.5A$ ,  $V_{IN} = 15V$ ,  $T_j = 0^{\circ}C \sim 125^{\circ}C$ ,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ , unless otherwise specified.)

Parameters	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = +25^{\circ}C$	8.82	9	9.18	V
		$I_O = 5mA$ to 1.0A, $P_o < 15W$ $V_I = 12.5V$ to 24V	8.65	9	9.35	
Line Regulation (Note3)	$\Delta V_O$	$T_j = 25^{\circ}C$ , $V_I = 11.5V$ to 26V	-	-	180	mV
		$T_j = 25^{\circ}C$ , $V_I = 12V$ to 18V	-	-	90	
Load Regulation (Note3)	$\Delta V_O$	$T_j = 25^{\circ}C$ , $I_O = 5mA$ to 1.0A	-	-	190	mV
		$T_j = 25^{\circ}C$ , $I_O = 250mA$ to 750mA	-	-	80	
Quiescent Current	$I_Q$	$T_J = 25^{\circ}C$	-	4.3	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5mA$ to 1.0A	-	-	0.5	mA
		$I_O = 500mA$ $V_I = 12.5V$ to 25V	-	-	0.8	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5mA$	-	1.2	-	mV/ $^{\circ}C$
Output Noise Voltage	$V_N$	$f = 10Hz$ to 100kHz	-	42	-	$\mu V/V_o$
Ripple Rejection	RR	$f = 120Hz$ , $V_I = 12.5V$ to 22.5V	-	61	-	dB
Dropout Voltage	$V_D$	$T_J = 25^{\circ}C$ , $I_O = 1.0A$	-	2	-	V
Output Resistance	$R_O$	$f = 1KHz$	-	18	-	m $\Omega$
Short Circuit Current	ISC	$T_J = 25^{\circ}C$ , $V_I = 35V$	-	200	-	mA

### Electrical Characteristics (LR7810E)

( $I_{OUT} = 0.5A$ ,  $V_{IN} = 16V$ ,  $T_j = 0^{\circ}C \sim 125^{\circ}C$ ,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ , unless otherwise specified.)

Parameters	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = +25^{\circ}C$	9.7	10	10.3	V
		$I_O = 5mA$ to 1.0A, $P_o < 15W$ $V_I = 11.5V$ to 23V	9.6	10	10.4	
Line Regulation (Note3)	$\Delta V_O$	$T_j = 25^{\circ}C$ , $V_I = 10.5V$ to 25V	-	8	200	mV
		$T_j = 25^{\circ}C$ , $V_I = 11V$ to 17V	-	4	100	
Load Regulation (Note3)	$\Delta V_O$	$T_j = 25^{\circ}C$ , $I_O = 5mA$ to 1.0A	-	18	200	mV
		$T_j = 25^{\circ}C$ , $I_O = 250mA$ to 750mA	-	8	100	
Quiescent Current	$I_Q$	$T_J = 25^{\circ}C$	-	4.3	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5mA$ to 1.0A	-	-	0.5	mA
		$I_O = 500mA$ $V_I = 11.5V$ to 25V	-	-	0.8	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5mA$	-	1.3	-	mV/ $^{\circ}C$
Output Noise Voltage	$V_N$	$f = 10Hz$ to 100kHz	-	42	-	$\mu V/V_o$
Ripple Rejection	RR	$f = 120Hz$ , $V_I = 11.5V$ to 21.5V	-	61	-	dB
Dropout Voltage	$V_D$	$T_J = 25^{\circ}C$ , $I_O = 1.0A$	-	2	-	V
Output Resistance	$R_O$	$f = 1KHz$	-	18	-	m $\Omega$
Short Circuit Current	ISC	$T_J = 25^{\circ}C$ , $V_I = 35V$	-	200	-	mA

### Electrical Characteristics (LR7812E)

( $I_{OUT} = 0.5A$ ,  $V_{IN} = 19V$ ,  $T_j = 0^{\circ}C \sim 125^{\circ}C$ ,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ , unless otherwise specified.)

Parameters	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = +25^{\circ}C$	11.5	12	12.5	V
		$I_O = 5mA$ to 1.0A, $P_o < 15W$ $V_I = 15.5V$ to 27V	11.4	12	12.6	
Line Regulation (Note3)	$\Delta V_O$	$T_j = 25^{\circ}C$ , $V_I = 14.5V$ to 30V	-	-	240	mV
		$T_j = 25^{\circ}C$ , $V_I = 16V$ to 22V	-	-	120	
Load Regulation (Note3)	$\Delta V_O$	$T_j = 25^{\circ}C$ , $I_O = 5mA$ to 1.0A	-	-	240	mV
		$T_j = 25^{\circ}C$ , $I_O = 250mA$ to 750mA	-	-	120	
Quiescent Current	$I_Q$	$T_J = 25^{\circ}C$	-	4.4	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5mA$ to 1.0A	-	-	0.5	mA
		$I_O = 500mA$ $V_I = 15V$ to 30V	-	-	0.8	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5mA$	-	1.5	-	mV/ $^{\circ}C$
Output Noise Voltage	$V_N$	$f = 10Hz$ to 100kHz	-	42	-	$\mu V/V_o$
Ripple Rejection	RR	$f = 120Hz$ , $V_I = 15V$ to 25V	-	60	-	dB
Dropout Voltage	$V_D$	$T_J = 25^{\circ}C$ , $I_O = 1.0A$	-	2	-	V
Output Resistance	$R_O$	$f = 1KHz$	-	18	-	m $\Omega$
Short Circuit Current	ISC	$T_J = 25^{\circ}C$ , $V_I = 35V$	-	200	-	mA

### Electrical Characteristics (LR7815E)

( $I_{OUT} = 0.5A$ ,  $V_{IN} = 23V$ ,  $T_j = 0^{\circ}C \sim 125^{\circ}C$ ,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ , unless otherwise specified.)

Parameters	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = +25^{\circ}C$	14.4	15	15.6	V
		$I_O = 5mA$ to 1.0A, $P_o < 15W$ $V_I = 17.5V$ to 30V	14.25	15	15.75	
Line Regulation (Note3)	$\Delta V_O$	$T_j = 25^{\circ}C$ , $V_I = 17.5V$ to 30V	-	15	300	mV
		$T_j = 25^{\circ}C$ , $V_I = 20V$ to 26V	-	7	150	
Load Regulation (Note3)	$\Delta V_O$	$T_j = 25^{\circ}C$ , $I_O = 5mA$ to 1.0A	-	25	300	mV
		$T_j = 25^{\circ}C$ , $I_O = 250mA$ to 750mA	-	10	150	
Quiescent Current	$I_Q$	$T_J = 25^{\circ}C$	-	5	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5mA$ to 1.0A	-	-	0.5	mA
		$I_O = 500mA$ $V_I = 18V$ to 30V	-	-	0.8	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5mA$	-	1.8	-	mV/ $^{\circ}C$
Output Noise Voltage	$V_N$	$f = 10Hz$ to 100kHz	-	42	-	$\mu V/V_o$
Ripple Rejection	RR	$f = 120Hz$ , $V_I = 18V$ to 28V	-	60	-	dB
Dropout Voltage	$V_D$	$T_J = 25^{\circ}C$ , $I_O = 1.0A$	-	2	-	V
Output Resistance	$R_O$	$f = 1KHz$	-	18	-	m $\Omega$
Short Circuit Current	ISC	$T_J = 25^{\circ}C$ , $V_I = 35V$	-	200	-	mA

### Electrical Characteristics (LR7818E)

( $I_{OUT} = 0.5A$ ,  $V_{IN} = 26V$ ,  $T_j = 0^{\circ}C \sim 125^{\circ}C$ ,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ , unless otherwise specified.)



Parameters	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = +25^{\circ}C$	17.3	18	18.7	V
		$I_O = 5mA$ to 1.0A, $P_o < 15W$ $V_I = 17.5V$ to 33V	17.1	18	18.9	
Line Regulation (Note3)	$\Delta V_O$	$T_j = 25^{\circ}C$ , $V_I = 21V$ to 33V	-	-	360	mV
		$T_j = 25^{\circ}C$ , $V_I = 24V$ to 30V	-	-	180	
Load Regulation (Note3)	$\Delta V_O$	$T_j = 25^{\circ}C$ , $I_O = 5mA$ to 1.0A	-	-	360	mV
		$T_j = 25^{\circ}C$ , $I_O = 250mA$ to 750mA	-	-	180	
Quiescent Current	$I_Q$	$T_J = 25^{\circ}C$	-	5	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5mA$ to 1.0A	-	-	0.5	mA
		$I_O = 500mA$ $V_I = 21V$ to 33V	-	-	0.8	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5mA$	-	2.1	-	mV/ $^{\circ}C$
Output Noise Voltage	$V_N$	$f = 10Hz$ to 100kHz	-	42	-	$\mu V/V_o$
Ripple Rejection	RR	$f = 120Hz$ , $V_I = 22V$ to 32V	-	57	-	dB
Dropout Voltage	$V_D$	$T_J = 25^{\circ}C$ , $I_O = 1.0A$	-	2	-	V
Output Resistance	$R_O$	$f = 1KHz$	-	18	-	m $\Omega$
Short Circuit Current	ISC	$T_J = 25^{\circ}C$ , $V_I = 35V$	-	200	-	mA

### Electrical Characteristics (LR7824E)

( $I_{OUT} = 0.5A$ ,  $V_{IN} = 33V$ ,  $T_j = 0^{\circ}C \sim 125^{\circ}C$ ,  $C_I = 0.33\mu F$ ,  $C_O = 0.1\mu F$ , unless otherwise specified.)

Parameters	Symbol	Conditions	Min.	Typ.	Max.	Unit
Output Voltage	$V_O$	$T_J = +25^{\circ}C$	23	24	25	V
		$I_O = 5mA$ to 1.0A, $P_o < 15W$ $V_I = 27V$ to 38V	22.8	24	25.2	
Line Regulation (Note3)	$\Delta V_O$	$T_j = 25^{\circ}C$ , $V_I = 27V$ to 38V	-	-	480	mV
		$T_j = 25^{\circ}C$ , $V_I = 30V$ to 36V	-	-	240	
Load Regulation (Note3)	$\Delta V_O$	$T_j = 25^{\circ}C$ , $I_O = 5mA$ to 1.0A	-	-	480	mV
		$T_j = 25^{\circ}C$ , $I_O = 250mA$ to 750mA	-	-	240	
Quiescent Current	$I_Q$	$T_J = 25^{\circ}C$	-	5	8	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5mA$ to 1.0A	-	-	0.5	mA
		$I_O = 500mA$ $V_I = 27V$ to 38V	-	-	0.8	
Output Voltage Drift	$\Delta V/\Delta T$	$I_O = 5mA$	-	2.1	-	mV/ $^{\circ}C$
Output Noise Voltage	$V_N$	$f = 10Hz$ to 100kHz	-	42	-	$\mu V/V_o$
Ripple Rejection	RR	$f = 120Hz$ , $V_I = 28V$ to 38V	-	57	-	dB
Dropout Voltage	$V_D$	$T_J = 25^{\circ}C$ , $I_O = 1.0A$	-	2	-	V
Output Resistance	$R_O$	$f = 1KHz$	-	18	-	m $\Omega$
Short Circuit Current	ISC	$T_J = 25^{\circ}C$ , $V_I = 35V$	-	200	-	mA

**Note:** 3. Load and line regulation are specified at constant junction temperature. Change in  $V_o$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

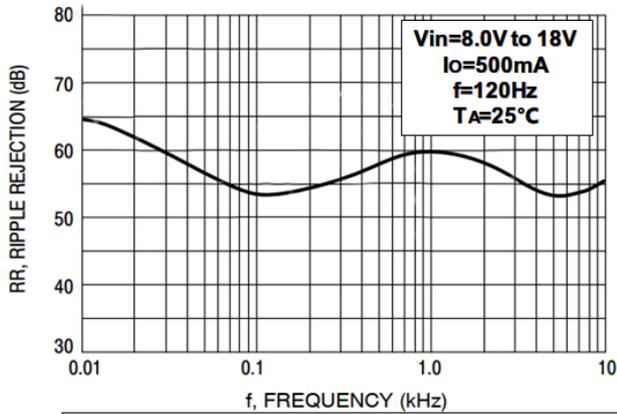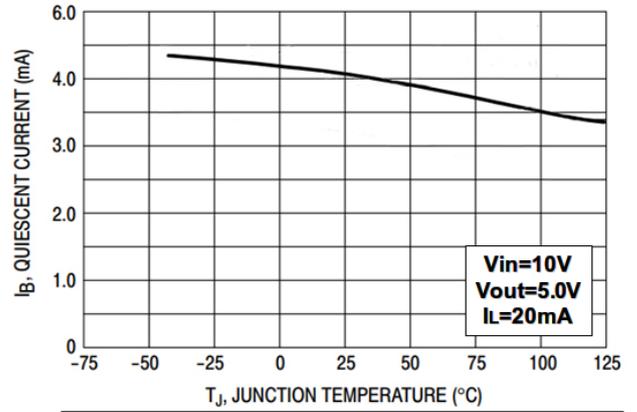
**Electrical Characteristics Curves** (Ta = 25°C unless otherwise specified.)

**Figure 1. Ripple Rejection as a Function of Frequency (LR78XXE Series)**

**Figure 2. Quiescent Current as a Function of Temperature (LR78XXE Series)**

## Package Dimensions


(All dimensions in millimeters)
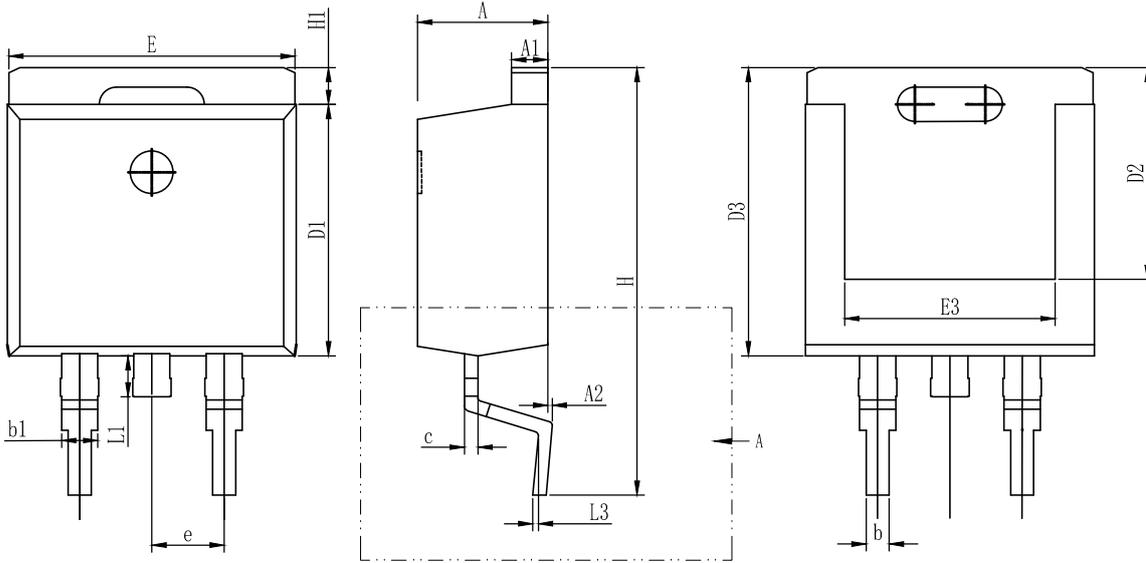
### TO-263

COMMON DIMENSIONS



SYMBOL	MM		
	MIN	NOM	MAX
A	4.42	4.57	4.72
A1	1.20	1.30	1.40
A2	0.00	-	0.25
b	0.73	0.83	0.93
b1	1.20	1.30	1.40
c	0.41	0.48	0.58
D1	8.70	8.90	9.10
D2	7.20	-	-
D3	9.91	10.21	10.51
E	9.75	10.05	10.35
E3	7.10	-	7.70
e	2.54BSC		
H	14.84	15.14	15.44
H1	1.10	1.30	1.50
H3	2.35	2.45	2.55
L	2.18	2.48	2.78
L1	-	-	1.75
L2	4.69	4.99	5.29
L3	0.25BSC		



## **DISCLAIMER**

- Curve guarantee in the specification. The curve of test items with electric parameter is used as quality guarantee. The curve of test items without electric parameter is used as reference only.
- Before you use our Products for new Project, you are requested to carefully read this document and fully understand its contents. LRC shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any LRC's Products against warning, caution or note contained in this document.
- All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using LRC's Products, please confirm the latest information with a LRC sales representative.
- First edition : The information contained in this document is provided on an "as is" basis and LRC does not warrant that all information contained in this document is accurate and/or error-free. LRC shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.

单击下面可查看定价，库存，交付和生命周期等信息

[>>LRC\(乐山无线电\)](#)