


## Programmable Precision Reference

# S-LR432XXTLT1G

### DESCRIPTION


The S-LR432ATLT1G is an automotive three-terminal adjustable regulator with a guaranteed thermal stability over applicable temperature ranges. The output voltage may be set to any value between V<sub>REF</sub> (approximately 1.24V) and 20V with two external resistors. It provides very wide applications, including shunt regulator, series regulator, switching regulator, voltage reference and others.

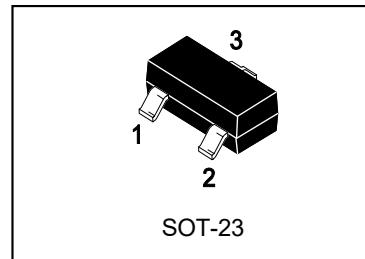

1: Ref; 2: Cathode; 3: Anode


### FEATURES

- Precise Reference Voltage to 1.24V/1.25V
- Guaranteed 0.5%/1.0% Reference Voltage Tolerance
- Sink Current Capability, 80 $\mu$ A to 100mA
- Quick Turn-on
- Adjustable Output Voltage,  $V_o = V_{REF}$  to 20V
- 0.2 $\Omega$  Typical Output Impedance
- ESD HBM 4500V
- We declare that the material of product is RoHS compliant and Halogen Free.
- S- prefix for automotive and other applications requiring unique site and control change requirements;  
AEC-Q100 qualified and PPAP capable.




### ORDERING INFORMATION

Device	Marking	RanK	Vref(V)	Shipping
S-LR432ATLT1G	9D	1.0%	1.24	3000 /Tape&Reel
S-LR432BTLT1G	9E	0.5%	1.24	3000 /Tape&Reel
S-LR432APLT1G	9F	1.0%	1.25	3000 /Tape&Reel
S-LR432BPLT1G	9G	0.5%	1.25	3000 /Tape&Reel

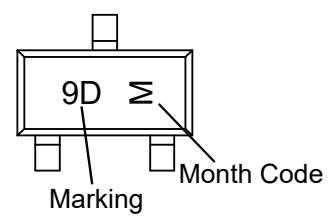

### BLOCK DIAGRAM

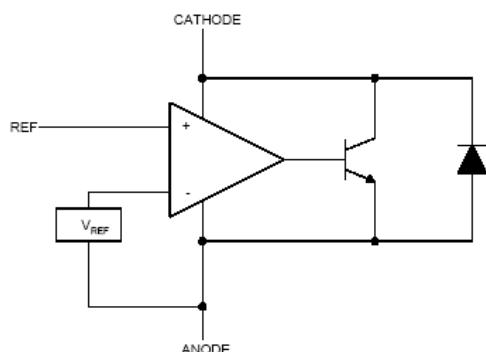

**ABSOLUTE MAXIMUM RATINGS**

Symbol	Parameter	Rating	Unit
$V_{KA}$	Cathode voltage	20	V
$I_K$	Continuous cathode current range	100	mA
$I_{REF}$	Reference current range	3	mA
$T_{opr}$	Operating Ambient Temperature	-40 to 125	°C
$T_j$	Operating Junction Temperature Range	-40 to 150	°C
$T_{stg}$	Storage Temperature Range	-65 to 150	°C

**ELECTRICAL CHARACTERISTICS** (TA= 25°C unless otherwise noted.)

Symbol	Parameter		Test Conditions	Min	Typ	Max	Unit
$V_{RFF}$	Reference Voltage	S-LR432ATLT1G	$V_{KA}=V_{REF}$ , $I_K=10\text{mA}$ (Fig. 1) $T_A=25^\circ\text{C}$	1.228	1.240	1.252	V
		S-LR432BTLT1G		1.234	1.240	1.246	
	Reference Voltage	S-LR432APTLT1G	$V_{KA}=V_{REF}$ , $I_K=10\text{mA}$ (Fig. 1) $T_A=25^\circ\text{C}$	1.238	1.250	1.262	
		S-LR432BPTLT1G		1.244	1.250	1.256	
$V_{DEV}$	$V_{REF}$ Temp Deviation		$T_A=\text{full range}$ $V_{KA}=V_{REF}$ , $I_K=10\text{mA}$ (Fig. 1)		10	25	mV
$\Delta V_{REF}/\Delta V_{KA}$	Ratio of Change in $V_{REF}$ to Change in Cathode Volt		$I_K=10\text{mA}$ , $V_{KA}=18\text{V}$ to $V_{REF}$ (Fig. 2)		-1	-2.7	mV / V
$I_{REF}$	Reference Input Current		$I_K=10\text{mA}$ , $R_1=10\text{k}\Omega$ $R_2=\infty$ (Fig.2)		0.25	0.5	μA
$I_{REF(DEV)}$	$I_{REF}$ Temp Deviation		$T_K=\text{full range}$ $R_1=10\text{k}\Omega$ , $R_2=\infty$ $I_K=10\text{mA}$ (Fig. 2)		0.05	0.3	μA
$I_K(\text{off})$	Off-state cathode current		$V_{REF}=0\text{ V}$ , (Fig.3) $V_k=18\text{V}$		0.04	0.5	μA
$Z_{ka}$	Dynamic Output Impedance		$V_{ka}=V_{ref}$ , $I_k=1\text{mA}$ to $100\text{mA}$ $F \leq 1\text{kHz}$ (Fig. 1)		0.2	0.4	Ω
$I_K(\text{MIN})$	Minimum Operating Current		$V_{KA}=V_{REF}$ (Fig. 1)		60	80	μA

## TEST CIRCUITS

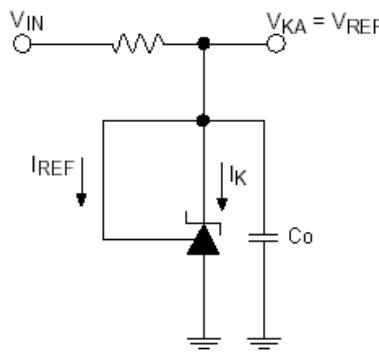


Fig.1 Test Circuit for  $V_{KA}=V_{ref}$ ,  
 $V_o=V_{KA}=V_{ref}$ ,  $C_o=0.1 \text{ F}$

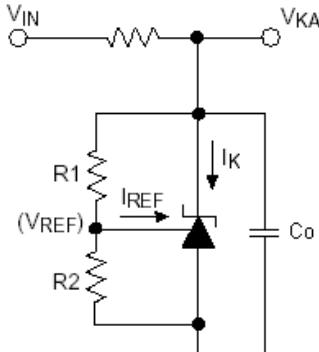


Fig.2 Test Circuit for  $V_{KA}>V_{ref}$ ,  
 $V_o=V_{KA}=V_{ref} \cdot (1+R_1/R_2)+I_{ref} \cdot R_1$ ,  
 $C_o=0.1 \text{ F}$

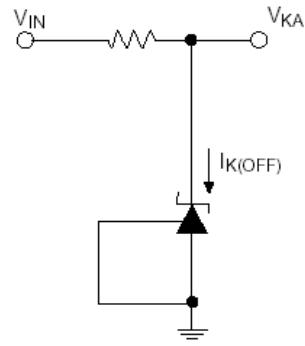


Fig.3 Test Circuit for  $I_k(\text{off})$

## PERFORMANCE CHARACTERISTIC CURVES

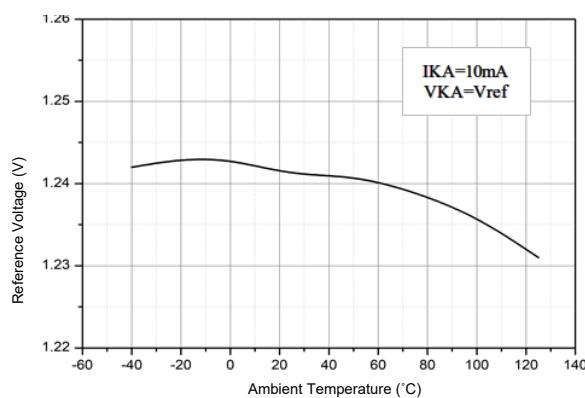


Figure 6. Reference Voltage VS. Ambient Temperature

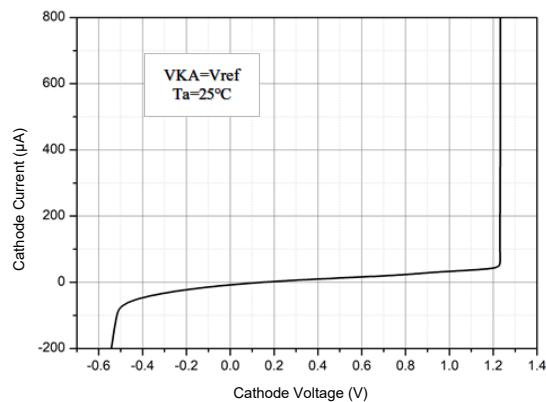


Figure 7. Cathode Current VS. Cathode Voltage

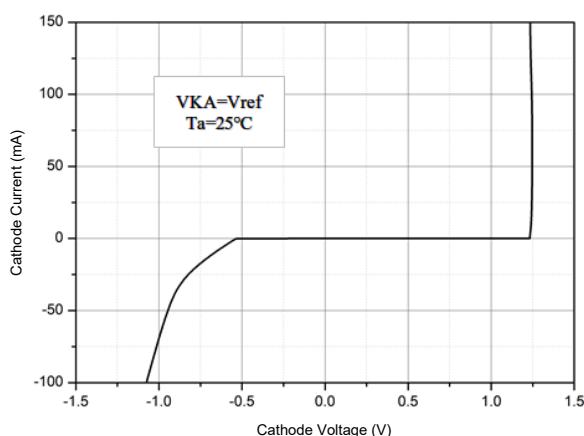


Figure 8. Cathode Current VS. Cathode Voltage

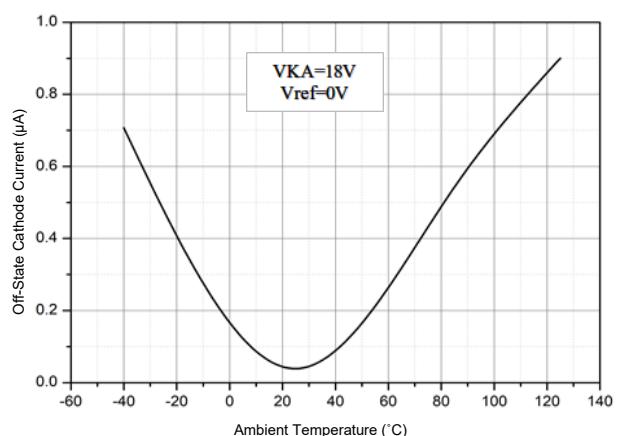


Figure 8. Off-State Current Cathode Current VS. Ambient Temperature

## PERFORMANCE CHARACTERISTIC CURVES (continued)

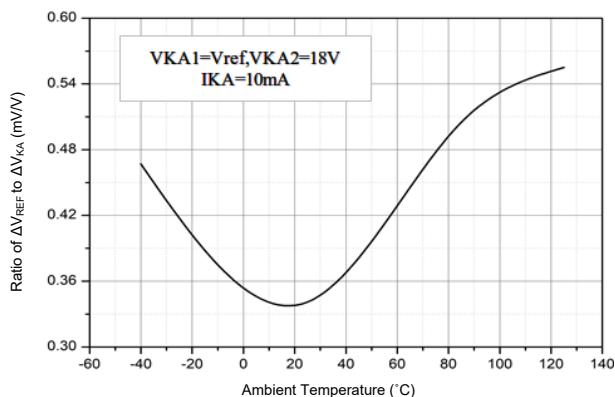


Figure 9. Ratio of Delta Reference Voltage to the Ratio of Delta Cathode Voltage Vs. Ambient Temperature

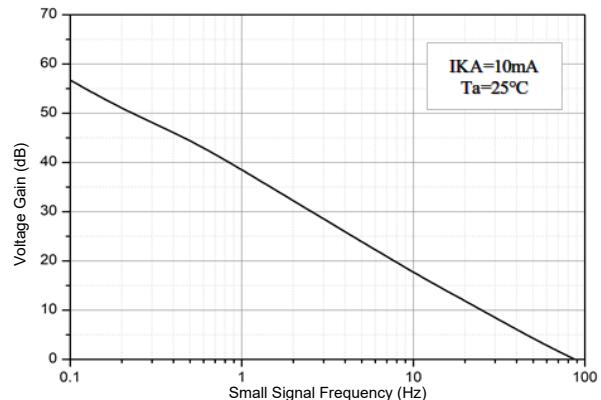


Figure 10. Small Signal Voltage Gain Vs. Frequency

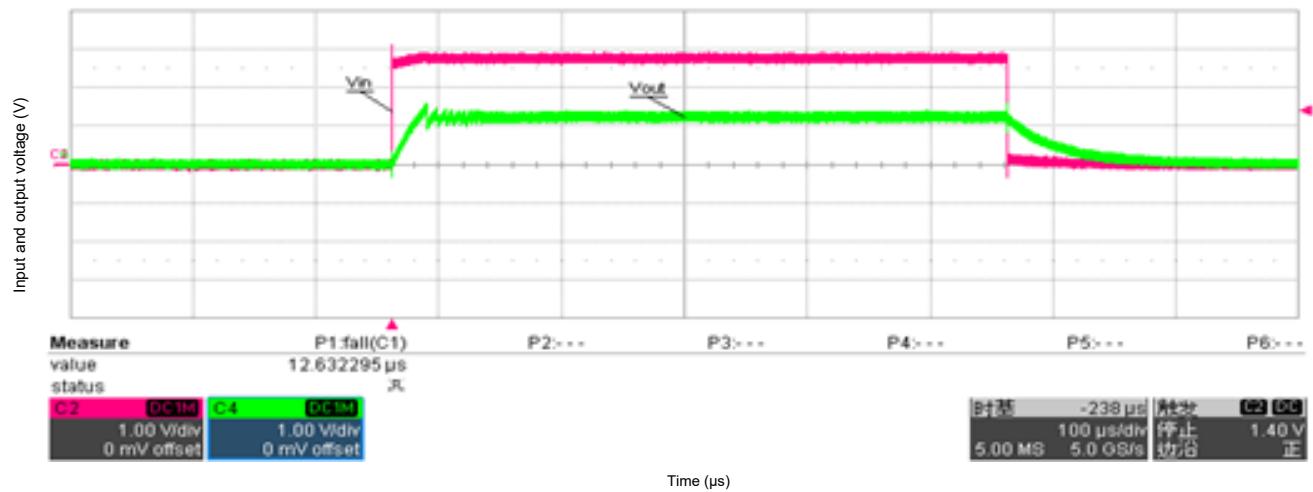


Figure 12. Pulse Response of Input and Output Voltage

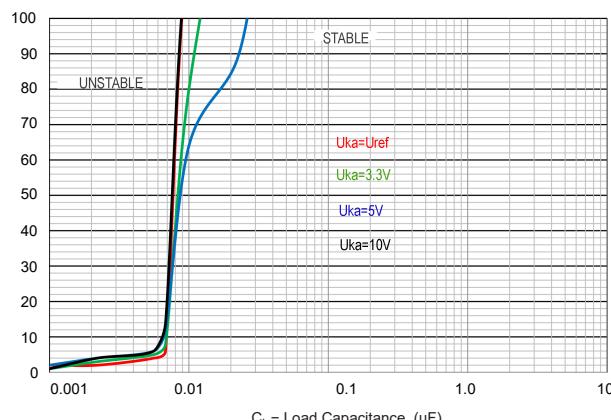


Figure 13. Cathode Current Vs Load Capacitance

## TYPICAL APPLICATION CIRCUIT

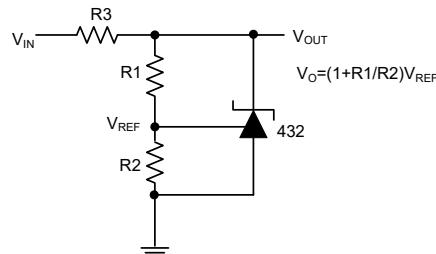


Figure 15. Shunt Regulator

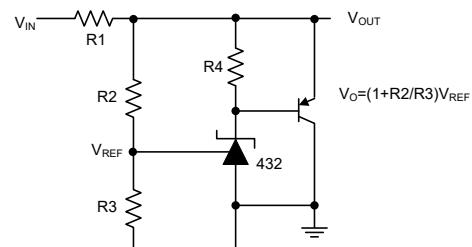


Figure 16. High Current Shunt Regulator

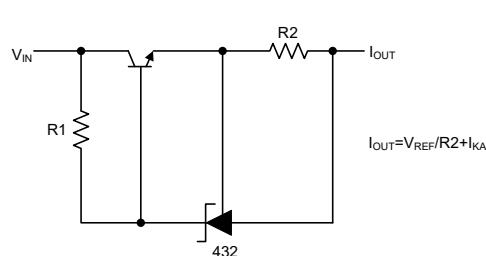


Figure 17. Current Source or Current Limit

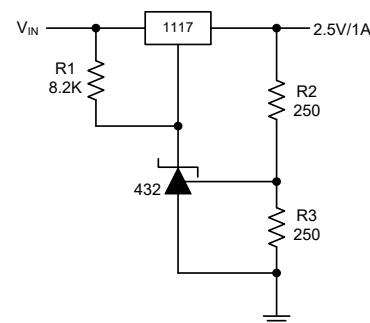


Figure 18. Precision 2.5V/1A Regulator


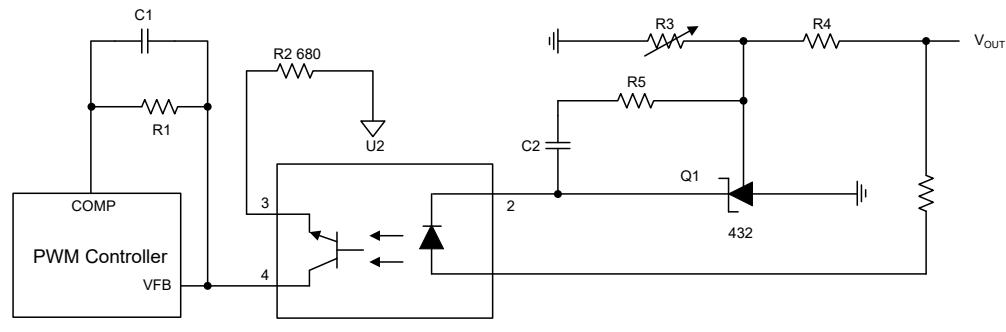


Figure 19. PWM Converter with Reference

## PACKAGE OUTLINE DIMENSIONS

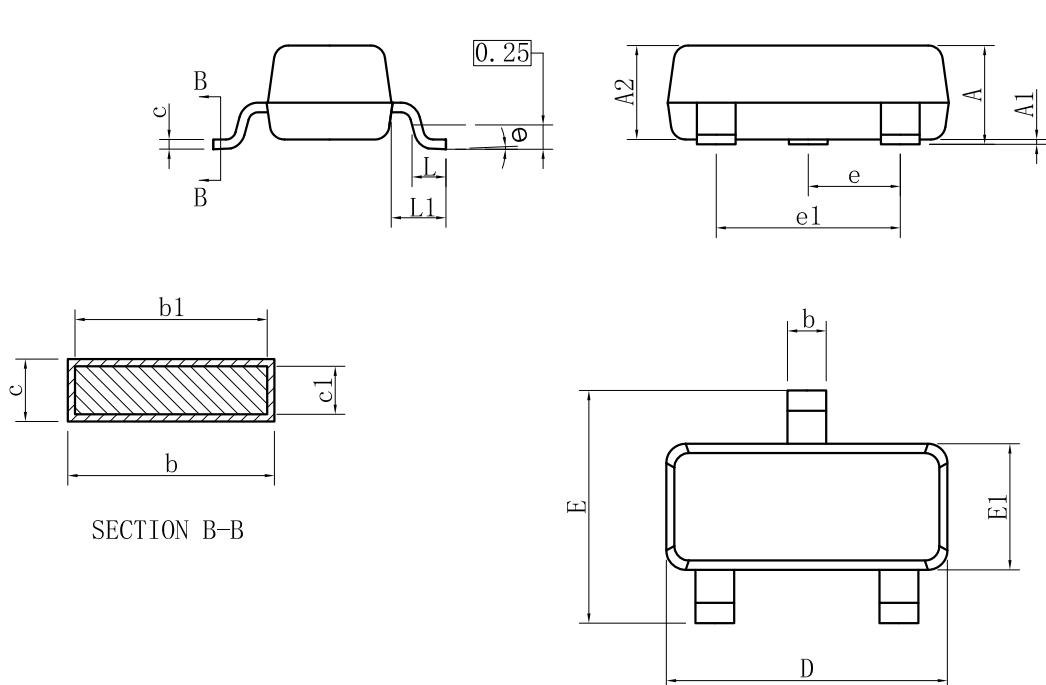


SOT23			
DIM	MIN	NOR	MAX
A	0.89	-	1.12
A1	0.01	-	0.10
A2	0.88	0.95	1.02
b	0.30	-	0.50
b1	0.30	0.40	0.45
c	0.08	-	0.20
c1	0.08	0.10	0.16
D	2.80	2.90	3.04
E	2.10	-	2.64
E1	1.20	1.30	1.40
e	0.95BSC		
e1	1.90BSC		
L	0.40	0.46	0.60
L1	0.54REF		
θ	0°	-	8°
All Dimensions in mm			

### GENERAL NOTES

- Top package surface finish Ra0.4±0.2um
- Bottom package surface finish Ra0.7±0.2um
- Side package surface finish Ra0.4±0.2um

## RECOMMENDED PAD LAYOUT

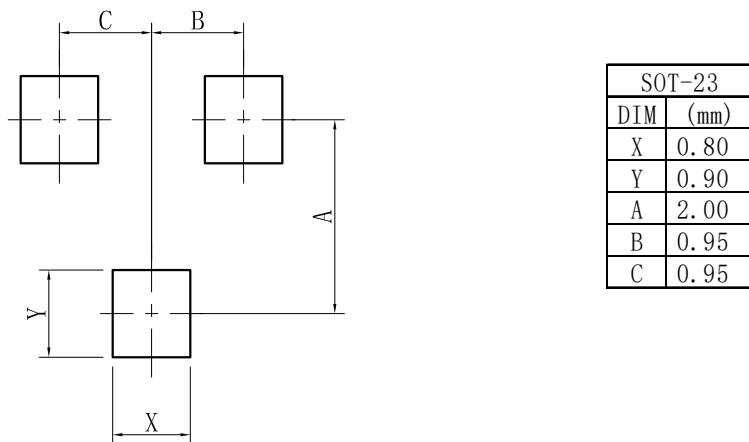

## REVISION HISTORY

Version	Description	Update by	Update Date
1.0	LRC ORIGINAL RELEASE.	陈帅	2022-11-30
1.1	增加S-LR432BTLT1G规格参数	陈帅	2023-01-05
1.2	增加S-LR432APLT1G和S-LR432BPTLT1G规格参数	陈帅	2023-03-27
1.3	变更 Cathode Current Vs Load Capacitance曲线	陈帅	2023-08-18
1.4	更新最新Cathode Current Vs Load Capacitance曲线 更新最新SOT23 POD.	陈帅	2024-01-18
1.5	更新最新电参曲线.	陈帅	2024-02-02

## DISCLAIMER

- Curve guarantee in the specification. The curve of test items with electric parameter is used as quality guarantee. The curve of test items without electric parameter is used as reference only.
- Before you use our Products for new Project, you are requested to carefully read this document and fully understand its contents. LRC shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any LRC's Products against warning, caution or note contained in this document.
- All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using LRC's Products, please confirm the latest information with a LRC sales representative.
- First edition : The information contained in this document is provided on an "as is" basis and LRC does not warrant that all information contained in this document is accurate and/or error-free. LRC shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.

单击下面可查看定价，库存，交付和生命周期等信息

[>>LRC\(乐山无线电\)](#)