

### FEATURES

- UL60950 recognised
- Single isolated output
- 1kVDC isolation
- Efficiency up to 87%
- Wide temperature performance at full 1 watt load, -40°C to 85°C
- Power density 2.62W/cm<sup>3</sup>
- 3.3V, 5V & 12V inputs
- 3.3V, 5V, 9V, 12V & 15V outputs
- Custom solutions available
- PCB mounting
- Footprint reduction of over 26% from previous generations of 1W DC-DC's

### DESCRIPTION

The MEU1 series is a new range of ultra miniature through hole 1W DC-DC converters, available in a ZIP style pinout. The MEU1 series offers 1W of available output power over the industrial temperature range of -40°C to 85°C. They are ideally suited for providing local supplies on control system boards.

With the added benefit of 1kVDC galvanic isolation to reduce switching noise and allows the device to be configured to provide an isolated negative rail in systems where only positive rails exist.

### SELECTION GUIDE

Order Code	Nominal Input Voltage	Output Voltage	Output Current	Load Regulation (Typ.)	Load Regulation (Max.)	Ripple & Noise (Typ.)	Ripple & Noise (Max.)	Input Current at Rated Load	Efficiency (Min.)	Efficiency (Typ.)	Isolation Capacitance (Typ.)	MTTF <sup>1</sup>	Recommended Alternative
	V	V	mA	%	%	mVp-p	mVp-p	mA	%	%	pF	kHrs	
	<span style="background-color: #90EE90; border: 1px solid black; padding: 2px;">Recommended</span> <span style="background-color: #ADD8E6; border: 1px solid black; padding: 2px; margin-left: 10px;">In Production</span>												
<b>MEU1S0303ZC</b>	3.3	3.3	303	11	14	27	50	385	73	76	28	3084	
<b>MEU1S0305ZC</b>	3.3	5	200	9	12	21	45	373	76	79	30	3125	
<b>MEU1S0505ZC</b>	5	5	200	7	9	19	45	244	78	81	34	3354	
<b>MEU1S0512ZC</b>	5	12	83	8	10	17	40	239	78	83	45	3317	
<b>MEU1S0515ZC</b>	5	15	67	6	8	12	35	239	78	83	39	2600	
<b>MEU1S1205ZC</b>	12	5	200	5	7	21	45	100	79	83	43	3742	
<b>MEU1S1212ZC</b>	12	12	83	5	7	15	40	100	82	86	91	2438	
	<span style="background-color: #FF6347; border: 1px solid black; padding: 2px; color: white;">To be discontinued</span>												
<b>MEU1S0309ZC</b>	3.3	9	111	10	13	16	40	376	75	79	34	3960	NTE0309MC
<b>MEU1S0312ZC</b>	3.3	12	83	9	12	15	40	369	77	81	40	3343	NTE0312MC
<b>MEU1S0315ZC</b>	3.3	15	67	8	10	14	40	371	77	81	33	3140	NTE0315MC
<b>MEU1S0503ZC</b>	5	3.3	303	9	12	26	50	249	74	77	29	2762	NTE0503MC
<b>MEU1S0509ZC</b>	5	9	111	9	12	17	40	245	77	81	47	2952	NTE0509MC
<b>MEU1S1209ZC</b>	12	9	111	6	9	17	40	100	80	84	71	2732	NTE1209MC
<b>MEU1S1215ZC</b>	12	15	67	4	6	15	40	100	84	87	91	2980	NTE1215MC

### INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	Continuous operation, 3.3V input types	2.97	3.3	3.63	V
	Continuous operation, 5V input types	4.5	5.0	5.5	
	Continuous operation, 12V input types	10.8	12.0	13.2	
Reflected ripple current	3.3V & 5V Input types		3	15	mA p-p
	12V Input types		5	15	

### OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power	T <sub>A</sub> = -40°C to 85°C			1.0	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High V <sub>IN</sub> to low V <sub>IN</sub>	0303	1.0	1.25	%/%
		All other types	1.0	1.2	

### ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Flash tested for 1 second	1000			VDC
Resistance	Viso = 1000VDC	10			GΩ

### GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency			85		kHz



For full details go to [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)



1. Calculated using MIL-HDBK-217F FN2 with nominal input voltage at full load.

All specifications typical at T<sub>A</sub> = 25°C, nominal input voltage and rated output current unless otherwise specified.

### TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types	-40		85	°C
Storage		-50		125	
Case Temperature above ambient	MEU1S03			30	
	All other types			25	
Cooling	Free air convection				

### ABSOLUTE MAXIMUM RATINGS

Lead temperature 1.5mm from case for 10 seconds	260°C
Wave Solder	Wave Solder profile not to exceed the profile recommended in IEC 61760-1 Section 6.1.3. Please refer to <a href="#">application notes</a> for further information.
Input voltage $V_{IN}$ , MEU1S03 types	5.5V
Input voltage $V_{IN}$ , MEU1S05 types	7V
Input voltage $V_{IN}$ , MEU1S12 types	15V



**CHARACTERISATION TEST METHODS**


**Ripple & Noise Characterisation Method**

Ripple and noise measurements are performed with the following test configuration.

C1	1µF X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC-DC converter
C2	10µF tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC-DC converter with an ESR of less than 100mΩ at 100 kHz
C3	100nF multilayer ceramic capacitor, general purpose
R1	450Ω resistor, carbon film, ±1% tolerance
R2	50Ω BNC termination
T1	3T of the coax cable through a ferrite toroid
RLOAD	Resistive load to the maximum power rating of the DC-DC converter. Connections should be made via twisted wires

Measured values are multiplied by 10 to obtain the specified values.

**Differential Mode Noise Test Schematic**

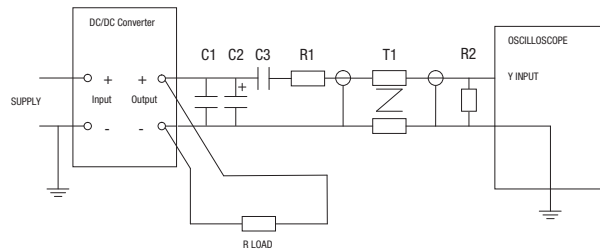

**APPLICATION NOTES**


**Minimum Load**

The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically 1.25 times the specified output voltage if the output load falls to less than 5%.

**Capacitive loading and start up**

Typical start up times for this series, with a typical input voltage rise time of 2.2µs and output capacitance of 10µF, are shown in the table below. The product series will start into a capacitance of 47µF with an increased start time, however, the maximum recommended output capacitance is 10µF.


	Start-up time	
		µs
MEU1S0303ZC		140
MEU1S0305ZC		280
MEU1S0309ZC		1050
MEU1S0312ZC		1930
MEU1S0315ZC		2790
MEU1S0503ZC		110
MEU1S0505ZC		200
MEU1S0509ZC		490
MEU1S0512ZC		880
MEU1S0515ZC		1400
MEU1S1205ZC		140
MEU1S1209ZC		240
MEU1S1212ZC		400
MEU1S1215ZC		600

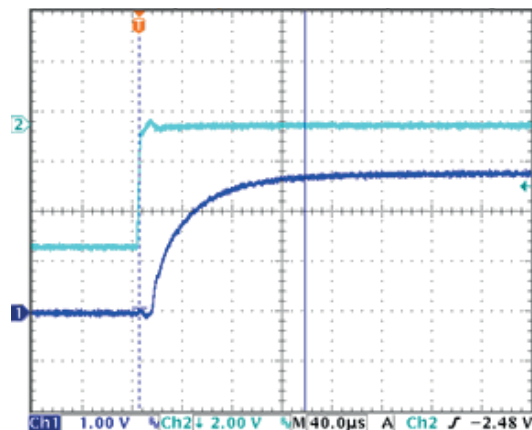


## TOLERANCE ENVELOPES

The voltage tolerance envelopes show typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading and set point accuracy.


**MEU1S0303ZC**

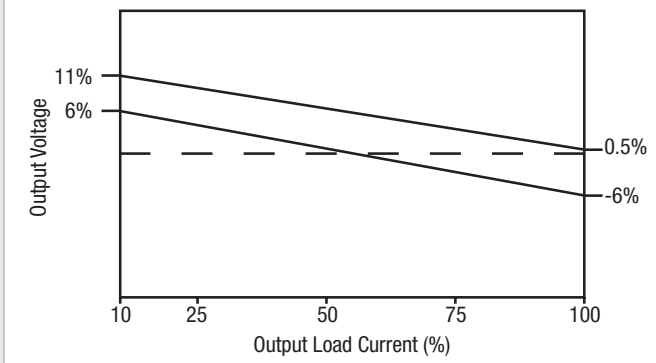


**MEU1S0305ZC**

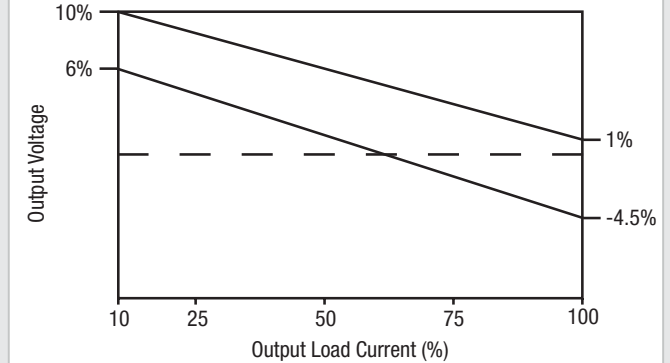







**MEU1S0309ZC**

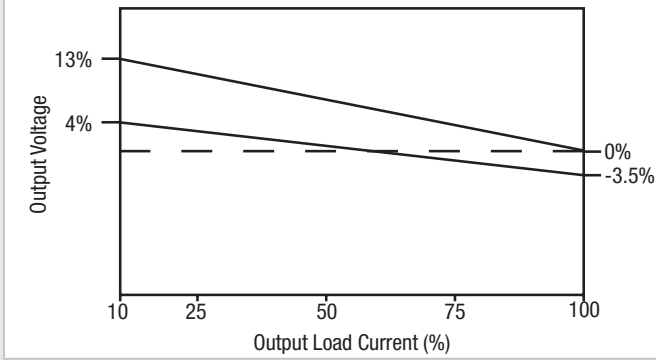





**MEU1S0312ZC**

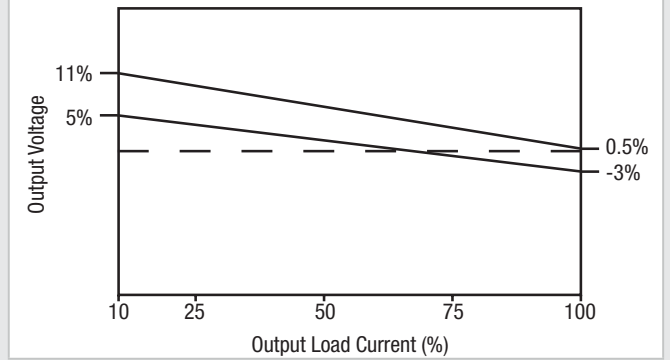


**TOLERANCE ENVELOPES (Continued)**

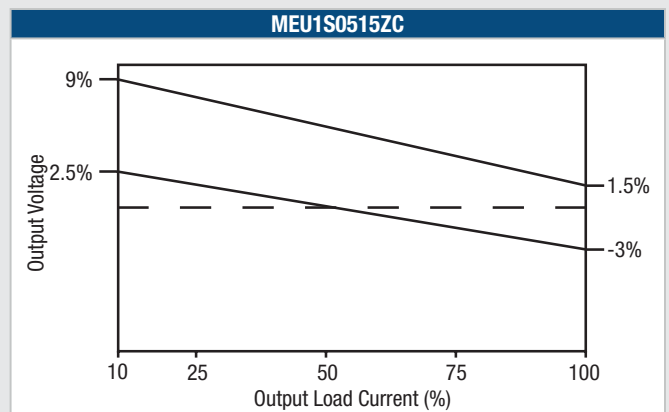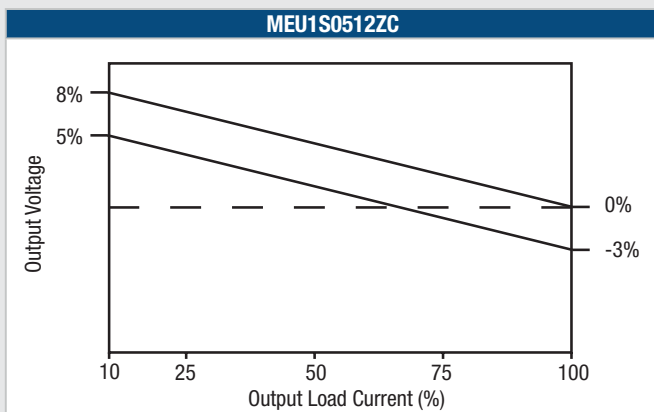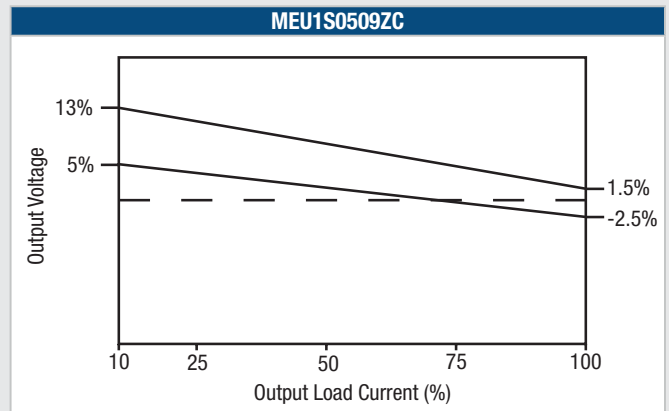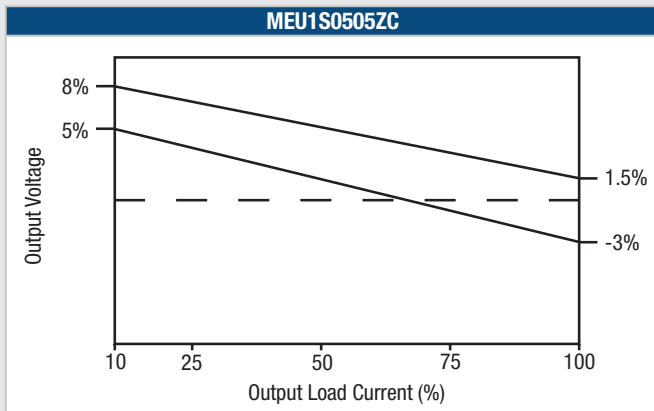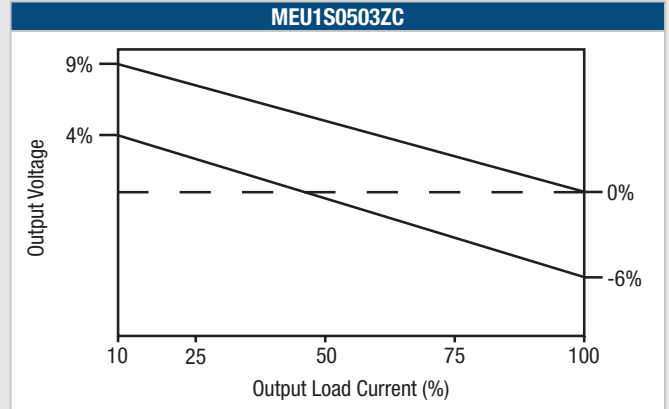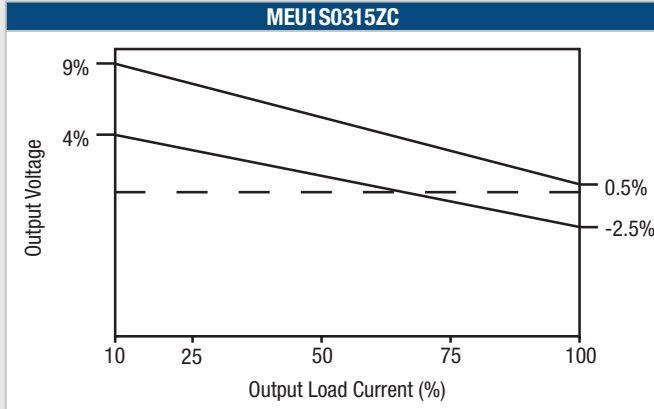

**TOLERANCE ENVELOPES (Continued)**

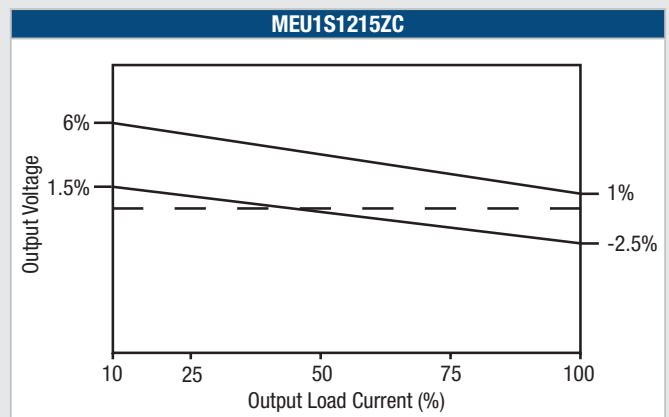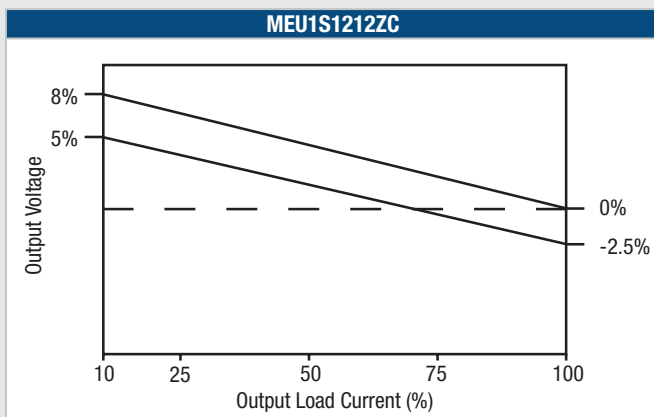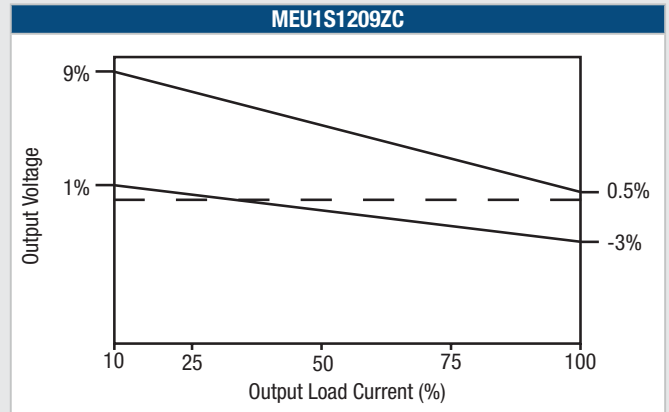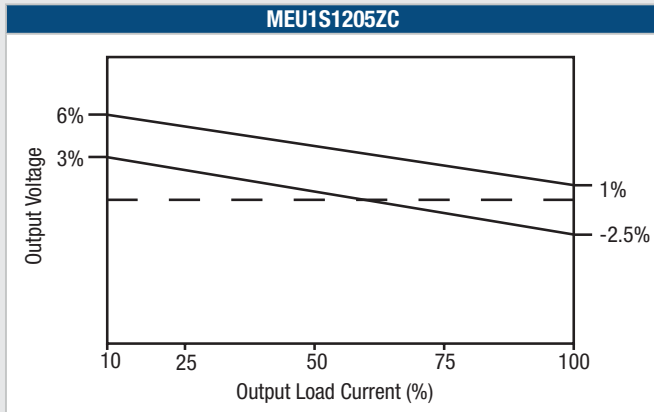


**TEMPERATURE DERATING GRAPH**

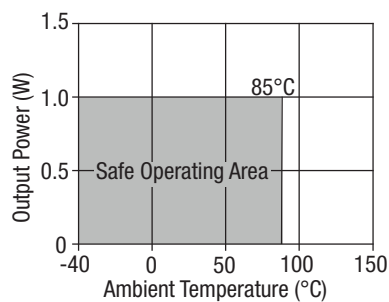


## EFFICIENCY VS LOAD


3.3V Input

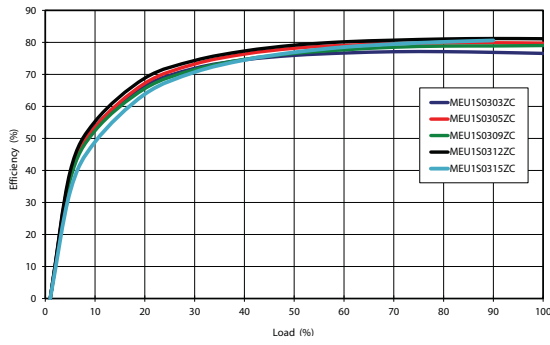

5V Input

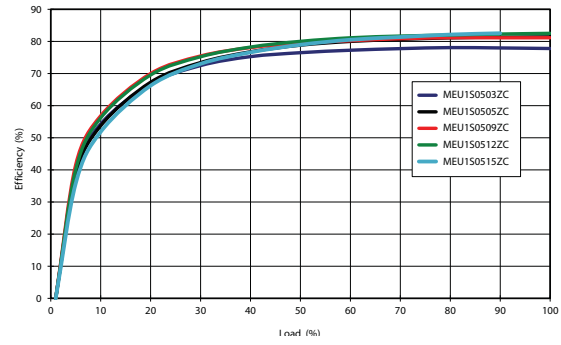


12V Input

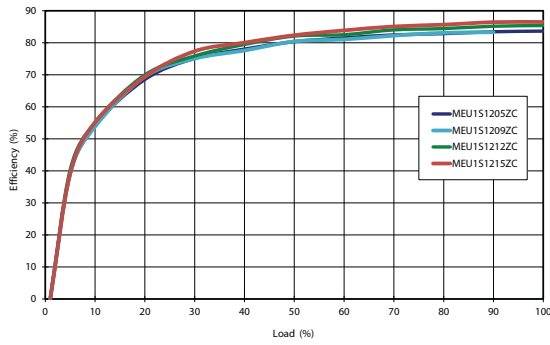



**PACKAGE SPECIFICATIONS**

**Mechanical Dimensions**

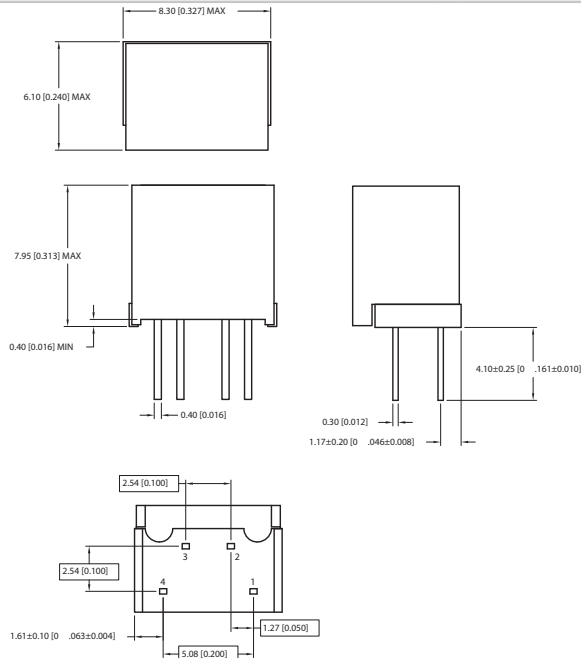


All dimensions in mm ±0.25mm (inches ±0.01). All pins on a 2.54 (0.1) pitch and within ± 0.25 (0.01) of true position.

Weight: 0.77g


**Pin connection - 4 PIN ZIP**

Pin	Function
1	-VIN
2	+VIN
3	-VOUT
4	+VOUT

**Recommended Footprint Details**

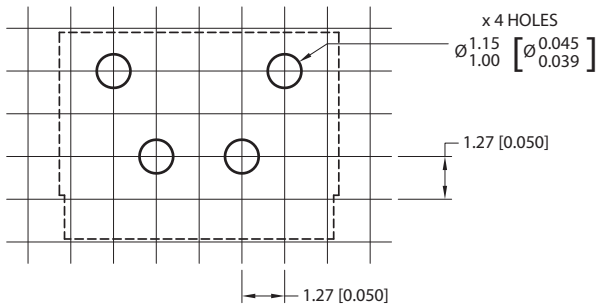

**Tube Outline Dimensions**

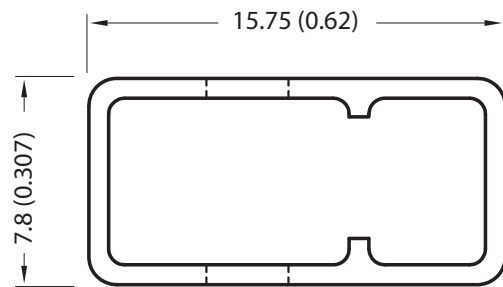

Unless otherwise stated all dimensions in mm (inches) ±0.5mm.  
 Tube length (4 Pin) : 520mm ±2mm (20.47).

Tube Quantity : 60

**DISCLAIMER**

Unless otherwise stated in the datasheet, all products are designed for standard commercial and industrial applications and NOT for safety-critical and/or life-critical applications.

Particularly for safety-critical and/or life-critical applications, i.e. applications that may directly endanger or cause the loss of life, inflict bodily harm and/or loss or severe damage to equipment/property, and severely harm the environment, a prior explicit written approval from Murata is strictly required. Any use of Murata standard products for any safety-critical, life-critical or any related applications without any prior explicit written approval from Murata shall be deemed unauthorised use.

These applications include but are not limited to:

- Aircraft equipment
- Aerospace equipment
- Undersea equipment
- Power plant control equipment
- Medical equipment
- Transportation equipment (automobiles, trains, ships, etc.)
- Traffic signal equipment
- Disaster prevention / crime prevention equipment
- Data Processing equipment

Murata makes no express or implied warranty, representation, or guarantee of suitability, fitness for any particular use/purpose and/or compatibility with any application or device of the buyer, nor does Murata assume any liability whatsoever arising out of unauthorised use of any Murata product for the application of the buyer. The suitability, fitness for any particular use/purpose and/or compatibility of Murata product with any application or device of the buyer remain to be the responsibility and liability of the buyer.

Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm, and take appropriate remedial actions. Buyer will fully indemnify and hold Murata, its affiliated companies, and its representatives harmless against any damages arising out of unauthorised use of any Murata products in any safety-critical and/or life-critical applications.

Remark: Murata in this section refers to Murata Manufacturing Company and its affiliated companies worldwide including, but not limited to, Murata Power Solutions.



This product is subject to the following [operating requirements](https://www.murata.com/en-eu/products/power/requirements) and the [Life and Safety Critical Application Sales Policy](https://www.murata.com/en-eu/products/power/requirements):

Refer to: <https://www.murata.com/en-eu/products/power/requirements>

Murata Power Solutions (Milton Keynes) Ltd. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.  
© 2021 Murata Power Solutions (Milton Keynes) Ltd.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Murata\(村田\)](#)