

Features

- SMALL VOLTAGE OFFSET:
 - TPA2296: $\pm 0.5\text{mV}$ (MAX)
- WIDE COMMON MODE VOLTAGE:
 - TPA2296: -0.1V to $+70\text{V}$
- WIDE CMRR THROUGH COMMON VOLTAGE: **100dB**
- SUPPLY VOLTAGE: **3.0V to +18V**
- ACCURACY and ZERO-DRIFT PERFORMANCE
 - $\pm 0.5\%$ Gain Error (Max, -40°C ~ 125°C)
 - $0.6\mu\text{V}/^\circ\text{C}$ Offset Drift (Max, -40°C ~ 125°C)
 - $5\text{ppm}/^\circ\text{C}$ Gain Drift (Max, -40°C ~ 125°C)
- THREE GAIN OPTIONS for VOLTAGE OUTPUT
 - TPA2296T: 20V/V
 - TPA2296F: 50V/V
 - TPA2296H: 100V/V

Description

The TPA2296 family is of high voltage, high side current sense amplifier with voltage output. The TPA2296 can sense drops across shunts at common-mode voltages from -0.1V up to 70V . The TPA2296 are available with three output voltage scales: 20V/V, 50V/V, 100V/V, with up to 0.5MHz bandwidth.


The TPA2296 operates from single 3.0V to 18V supply, offers breakthrough performance throughout the -40°C to $+125^\circ\text{C}$ temperature range. It features a zero-drift core, which leads to an offset drift of $0.6\mu\text{V}/^\circ\text{C}$ throughout the operating temperature range and the common-mode voltage range.

The TPA2296 is offered in 6-pin and 5-pin SOT23 package.

Applications

- CURRENT SENSING (High-Side/Low-Side)
- BATTERY CHARGERS & POWER MANAGEMENT
- AUTOMOTIVE & INDUSTRIAL CONTROL
- BASE STATIONS & TELECOM EQUIPMENT

Functional Block Diagram

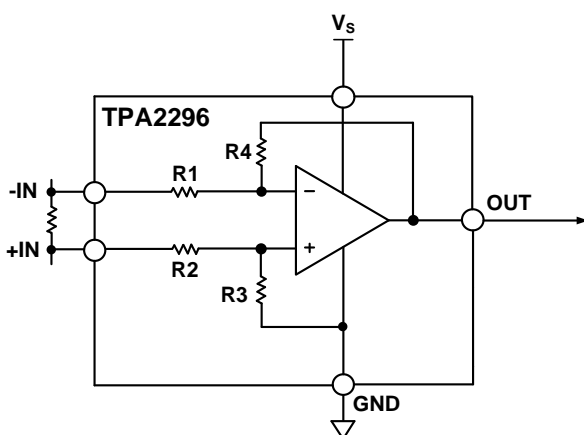

Pin Configuration

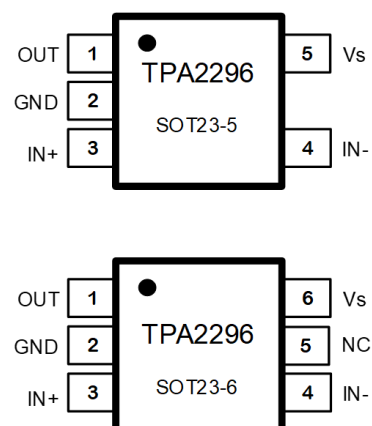


Table of Contents

| | |
|--|----|
| Features | 1 |
| Applications | 1 |
| Description | 1 |
| Functional Block Diagram | 1 |
| Pin Configuration..... | 1 |
| Revision History | 3 |
| Pin Functions and Description | 3 |
| Order Information | 3 |
| Absolute Maximum Ratings | 4 |
| ESD, Electrostatic Discharge Protection..... | 4 |
| Thermal Resistance | 4 |
| Electrical Characteristics..... | 5 |
| Typical Performance Characteristics | 6 |
| Applications Information..... | 8 |
| Selecting Rsense | 8 |
| Recommended Component Values..... | 8 |
| Power Supply Recommendation | 8 |
| Layout: Kelvin connection | 8 |
| TAPE AND REEL INFORMATION | 9 |
| Package Outline Dimensions | 10 |
| SOT23-6L..... | 10 |
| SOT23-5L..... | 11 |

Revision History

Table 1

| Date | Revision | Notes |
|------------|-----------|---|
| 2019/11/15 | Rev.Pre | Initial Version |
| 2020/7/31 | Rev.Pre.1 | Pre-released datasheet to VIP customer |
| 2020/8/17 | Rev.A.0 | Released version |
| 2020/10/17 | Rev.A.1 | Add Vos test condition |
| 2021/10/16 | Rev.A.2 | Update figure of step response |
| 2022/5/1 | Rev.A.3 | Update order information and package outline dimensions |

Pin Functions and Description

Table 2

| PIN No. | | PIN NAME | TPA2296 DESCRIPTION |
|---------|---------|----------|---------------------|
| SOT23-5 | SOT23-6 | | |
| 4 | 4 | IN- | Negative Input |
| 2 | 2 | GND | Ground |
| 1 | 1 | OUT | Output |
| 5 | 6 | Vs | Power supply |
| 3 | 3 | IN+ | Positive Input. |
| | 5 | NC | No Connect |

Order Information

Table 3

| Model Name | Order Number | Gain | Package | MSL | Transport Media, Quantity | Package Marking |
|------------|-----------------------------------|------|---------|-----|---------------------------|-----------------|
| TPA2296 | TPA2296T-S5TR | 20 | SOT23-5 | 3 | Tape and Reel, 3,000 | A6T |
| | TPA2296F-S5TR ^{Note 1} | 50 | SOT23-5 | 3 | Tape and Reel, 3,000 | A6F |
| | TPA2296H-S5TR-S | 100 | SOT23-5 | 3 | Tape and Reel, 3,000 | A6H |
| | TPA2296T-S6TR-S ^{Note 1} | 20 | SOT23-6 | 3 | Tape and Reel, 3,000 | C6T |
| | TPA2296F-S6TR-S ^{Note 1} | 50 | SOT23-6 | 3 | Tape and Reel, 3,000 | C6F |
| | TPA2296H-S6TR-S | 100 | SOT23-6 | 3 | Tape and Reel, 3,000 | C6H |

Note 1: Future product, contact 3PEAK factory for more information and sample.

Absolute Maximum Ratings Note 2

| | | | |
|---|-------------|---|----------------|
| Supply Voltage | 40V | Operating Temperature Range..... | -40°C to 125°C |
| Input Common Voltage (Continuous)..... | -0.3 to 75V | Maximum Working Junction Temperature..... | 150°C |
| Input Common Voltage (Survival)..... | -0.3 to 80V | Storage Temperature Range..... | -65°C to 150°C |
| Input Current: +IN, -IN <small>Note 3</small> | ±10mA | | |

Note 2: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 3: The inputs are protected by ESD protection diodes to power supply.

ESD, Electrostatic Discharge Protection

Table 4

| Symbol | Parameter | Condition | Minimum Level | Unit |
|--------|--------------------------|------------------------|---------------|------|
| HBM | Human Body Model ESD | ANSI/ESDA/JEDEC JS-001 | 2 | kV |
| CDM | Charged Device Model ESD | ANSI/ESDA/JEDEC JS-002 | 1.5 | kV |

Thermal Resistance

Table 5

| Package Type | θ_{JA} | θ_{JC} | Unit |
|--------------|---------------|---------------|------|
| SOT23-6 | 250 | 81 | °C/W |
| SOT23-5 | 250 | 81 | °C/W |

Electrical Characteristics

The specifications are at T = 25°C, VSENSE = VIN+ – VIN– = 1mV, Vs = 12V, VIN+ = 70V, unless otherwise noted

Table 6


| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------------------------------------|-------------------------------|--|-------|-------|-------|--------|
| INPUT | | | | | | |
| V _{OS} | Input Offset Voltage | -40°C to 125°C, VIN- = 0V | | ±50 | ±500 | μV |
| V _{OS} TC ^{Note 4} | Input Offset Voltage Drift | -40°C to 125°C | | | 0.6 | μV/°C |
| V _{CM} | Common-mode Input Range | -40°C to 125°C | -0.1 | | 70 | V |
| CMRR | Common Mode Rejection Ratio | -40°C to 125°C, -0.3V < V+ < 70V, G=20V/V | 90 | 110 | | dB |
| | | -40°C to 125°C, -0.3V < V+ < 70V, G=50V/V | 95 | 115 | | dB |
| | | -40°C to 125°C, -0.3V < V+ < 70V, G=100V/V | 100 | 120 | | dB |
| I _B | Input Bias Current | -40°C to 125°C | | | 210 | μA |
| PSRR | Power Supply Rejection Ratio | -40°C to 125°C | | 110 | | dB |
| NOISE RTI ^{Note 5} | | | | | | |
| e _n | Input Voltage Noise Density | f = 1kHz | | 55 | | nV/√Hz |
| OUTPUT | | | | | | |
| G | Gain | TPA2296T, -40°C to 125°C | 19.9 | 20 | 20.1 | V/V |
| | | TPA2296F, -40°C to 125°C | 49.75 | 50 | 50.25 | V/V |
| | | TPA2296H, -40°C to 125°C | 99.5 | 100 | 100.5 | V/V |
| GE | Gain Error | -40°C to 125°C | | ±0.1% | ±0.5% | |
| GE TC | Gain Error Vs Temperature | -40°C to 125°C | | 3 | 5 | ppm/°C |
| C _{LOAD} | Maxim capacitive load | No oscillation | | 0.5 | | nF |
| V _{OH} | Output Swing from Supply Rail | -40°C to 125°C, Source 1.2mA | | 0.15 | 0.310 | V |
| V _{OL} | Output Swing from GND | -40°C to 125°C | | 0.01 | 0.02 | V |
| FREQUENCY RESPONSE | | | | | | |
| BW | Bandwidth | TPA2296T | | 400 | | kHz |
| | | TPA2296F | | 300 | | kHz |
| | | TPA2296H | | 200 | | kHz |
| SR | Slew Rate | VSENSE = VIN+ – VIN– = 500mV | | 20 | | V/μs |
| POWER SUPPLY | | | | | | |
| V _s | Supply Voltage | | 3.0 | | 18 | V |
| I _Q | Quiescent Current | -40°C to 125°C | | 600 | 1000 | μA |
| TEMPERATURE RANGE | | | | | | |
| | Specified range | | -40 | | 125 | °C |


Note 4: Maxim specification is calculated with limited sample quantity in laboratory.

Note 5: RTI = referred to input.


Typical Performance Characteristics

The TPA2296T is used for characteristics at TA = 25°C, VSENSE = VIN+ – VIN– = 1mV, Vs = 12V, VIN+ =24V, unless otherwise noted

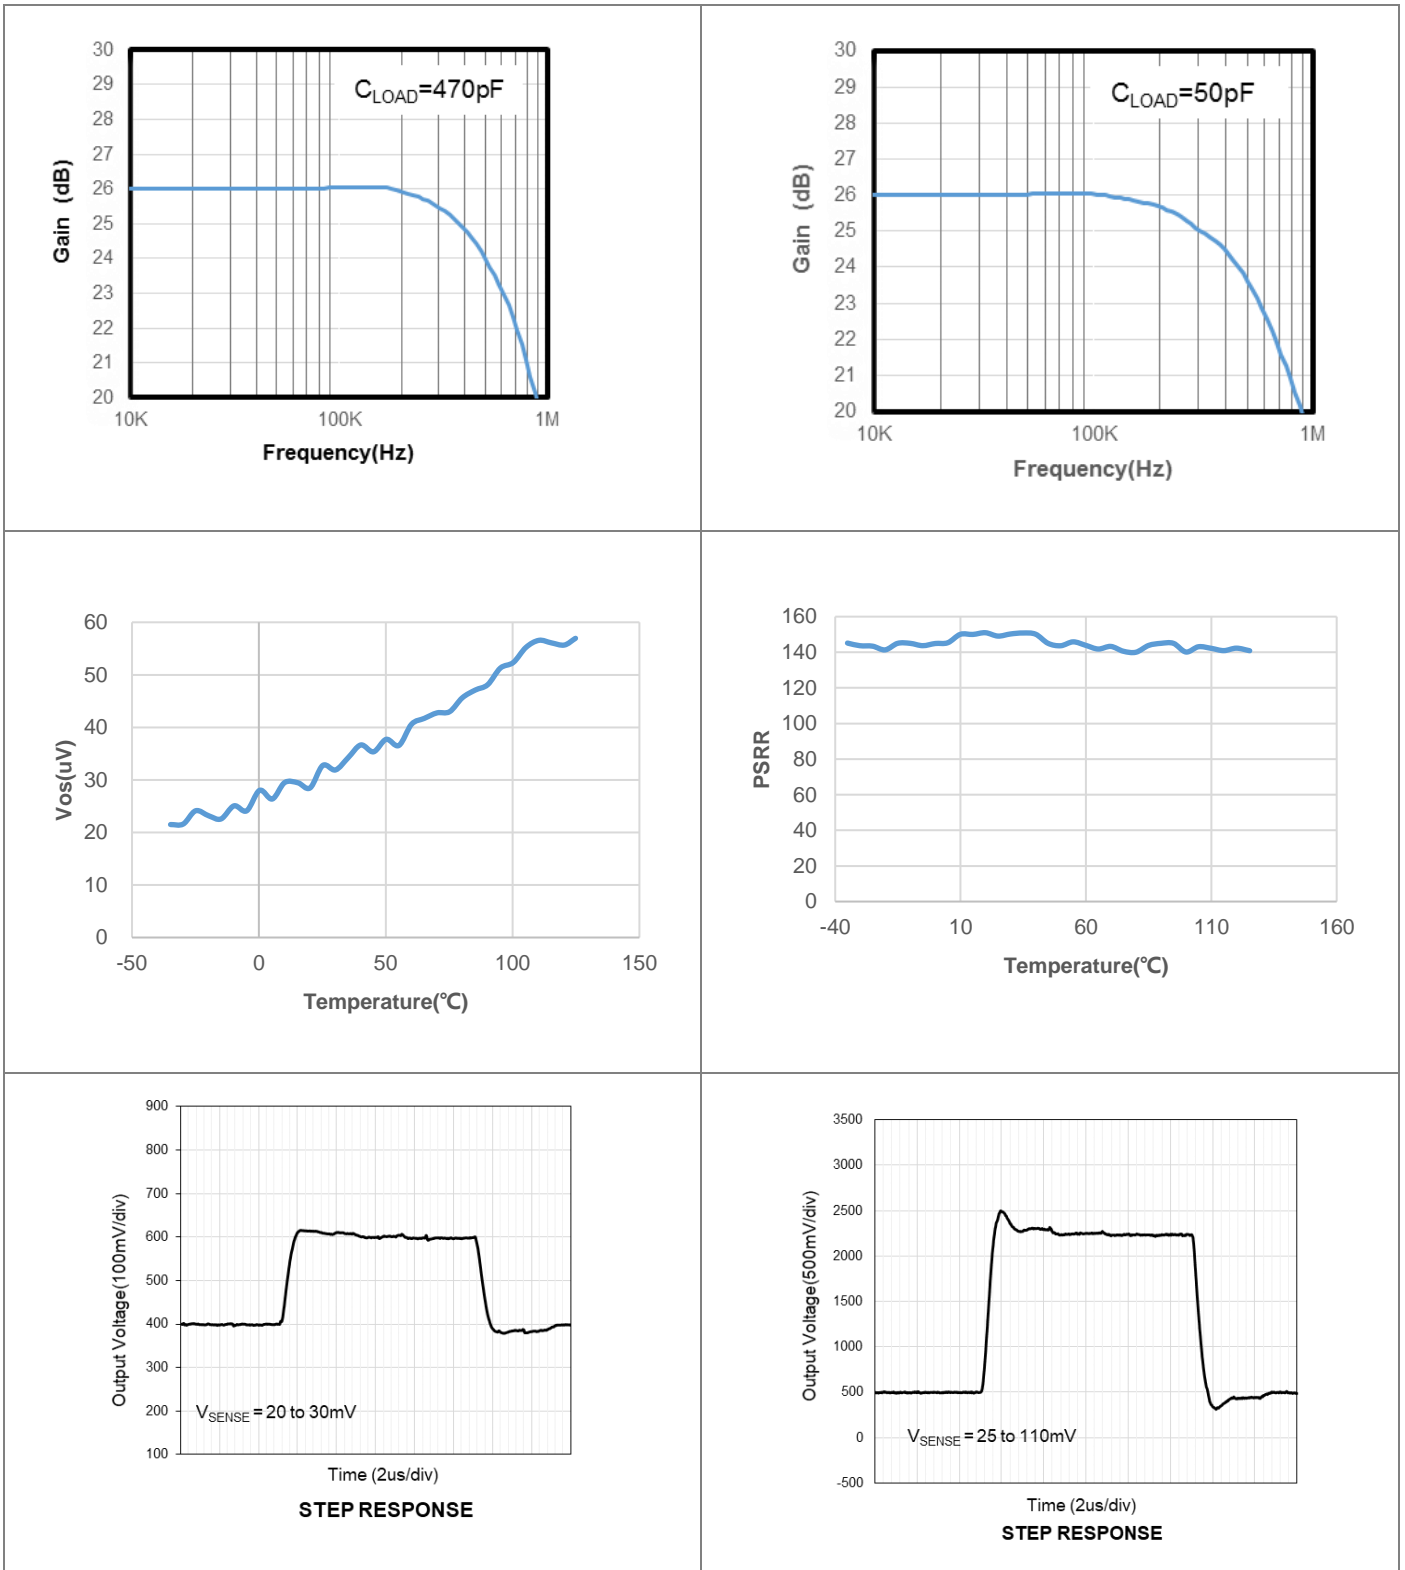

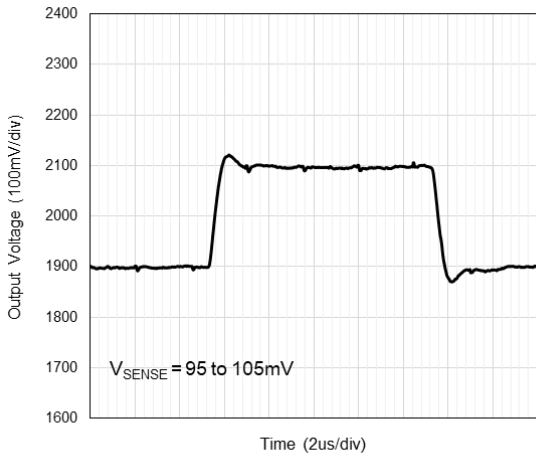

STEP RESPONSE

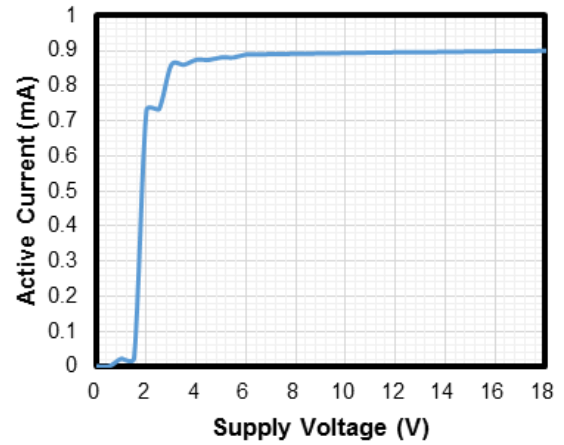

Applications Information

Selecting Rsense

The zero-drift offset performance of the TPA2296 offers several benefits. Most often, the primary advantage of the low offset characteristic enables lower full-scale drops across the Rsense. For example, non-zero-drift current sense monitors typically require a full-scale range of 100 mV. The TPA2296 family gives equivalent accuracy at a full-scale range on the order of 10 mV. This accuracy reduces Rsense dissipation by an order of magnitude with many additional benefits.

Alternatively, there are applications that must measure current over a wide dynamic range that can take advantage of the low offset on the low end of the measurement. Most often, these applications can use the lower gains of the TPA2296 to accommodate larger Rsense drops on the upper end of the scale.

Recommended Component Values

Ideally, the maximum load current develops the full-scale sense voltage across the current-sense resistor. Choose the gain needed to match the maximum output voltage required for the application:

$$V_{out} = V_{sense} \times A_v$$

Where Vsense is the full-scale sense voltage, and Av is the gain of the TPA2296.

In applications of monitoring a high current, ensure that Rsense is able to dissipate its own I²R power loss. If the resistor's power dissipation exceeds the nominal value, its value may drift, or it may fail altogether. The TPA2296 senses a wide variety of currents with different sense-resistor values.


Power Supply Recommendation

The input circuitry of the TPA2296 can accurately measure beyond its power-supply voltage, Vs. For example, the Vs power supply can be 5V, whereas the load power-supply voltage can be as high as 70V. However, the output voltage range of the OUT pin is limited by the voltages on the power-supply pin.


Layout: Kelvin connection

A typical routing of Kelvin-sensed traces to the inputs of the TPA2296 is needed in PCB Layout. The Kelvin-sense traces should be as close as possible to the current-sense resistor's solder contact pads. Any additional high-current carrying impedance can cause significant measurement errors because the current resistor has a very low value.


TAPE AND REEL INFORMATION

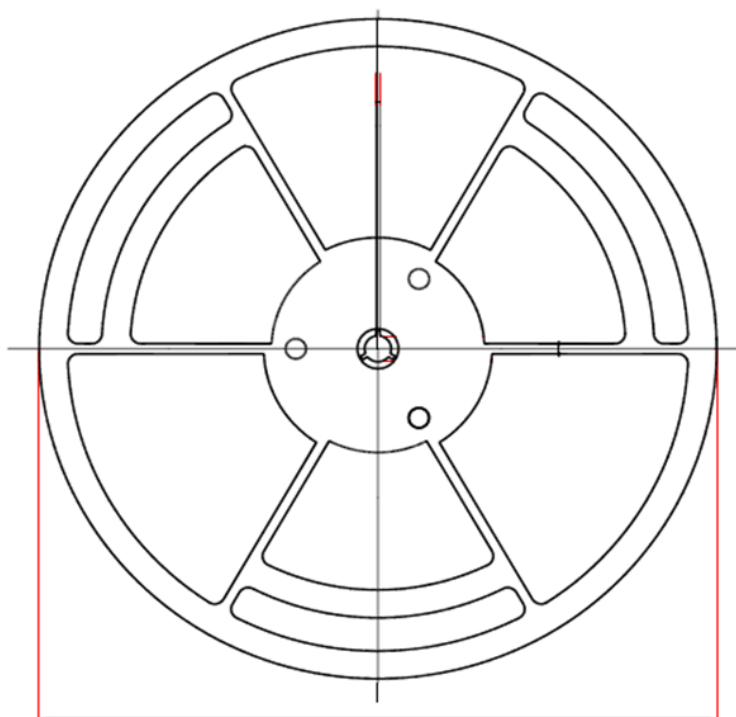

D1: Reel Diameter

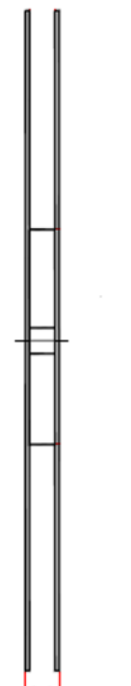

W1: Reel Width

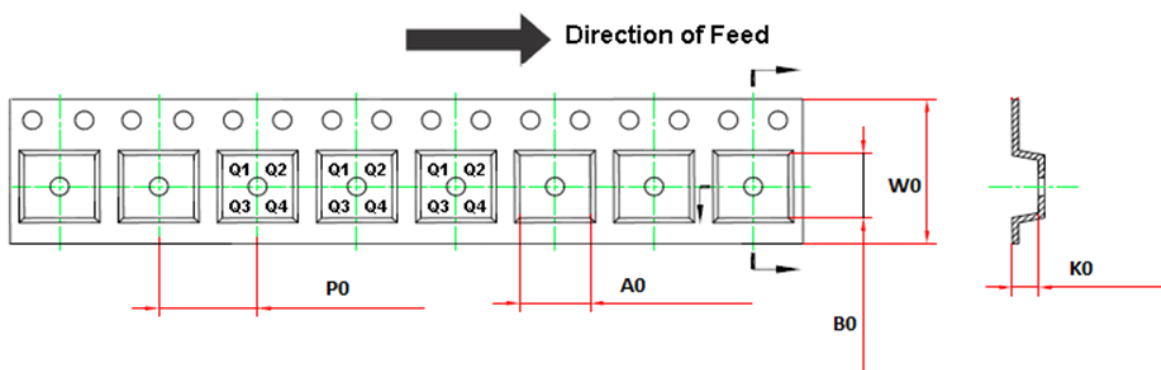





| Order Number | Package | D1 | W1 | A0 | B0 | K0 | P0 | W0 | Pin1 Quadrant |
|-----------------|-------------|-------|------|-----|-----|-----|-----|-----|---------------|
| TPA2296T-S5TR | 5-Pin SOT23 | 180.0 | 13.1 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPA2296F-S5TR | 5-Pin SOT23 | 180.0 | 13.1 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPA2296H-S5TR-S | 5-Pin SOT23 | 180.0 | 13.1 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPA2296T-S6TR-S | 6-Pin SOT23 | 178.0 | 12.3 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPA2296F-S6TR-S | 6-Pin SOT23 | 178.0 | 12.3 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPA2296H-S6TR-S | 6-Pin SOT23 | 178.0 | 12.3 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |

Package Outline Dimensions

SOT23-6L

Package Outline Dimensions

S6T(SOT23-6-A)

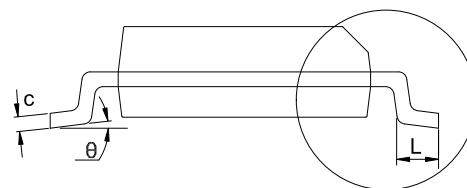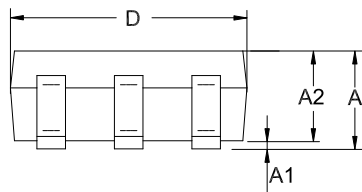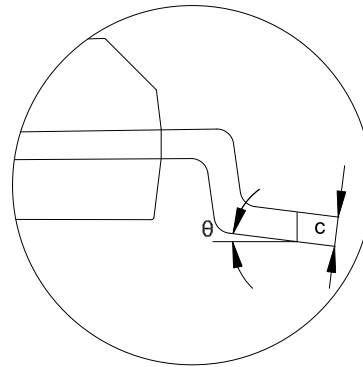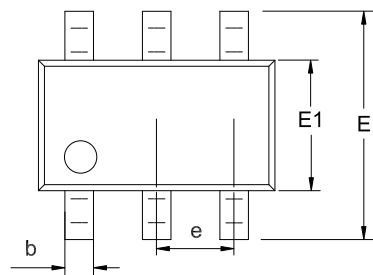

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.150 | 0.000 | 0.006 |
| A2 | 1.000 | 1.200 | 0.039 | 0.047 |
| b | 0.280 | 0.500 | 0.011 | 0.020 |
| c | 0.100 | 0.230 | 0.004 | 0.009 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 2.600 | 3.000 | 0.102 | 0.118 |
| E1 | 1.500 | 1.720 | 0.059 | 0.068 |
| e | 0.950 BSC | | 0.037 BSC | |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0 | 8° | 0 | 8° |





NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

SOT23-5L

Package Outline Dimensions

S5T(SOT23-5-A)

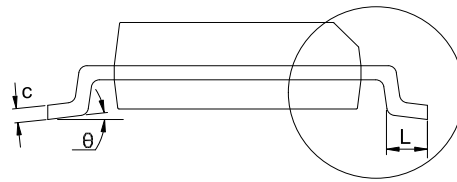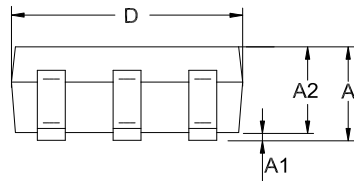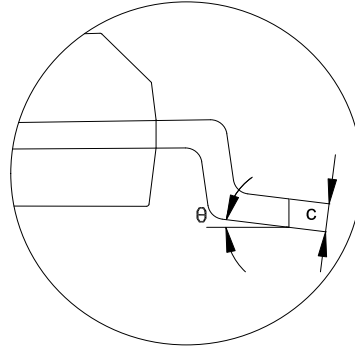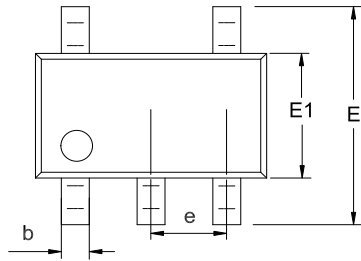

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|------------------------------|-------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.150 | 0.000 | 0.006 |
| A2 | 1.000 | 1.200 | 0.039 | 0.047 |
| b | 0.280 | 0.500 | 0.011 | 0.020 |
| c | 0.100 | 0.230 | 0.004 | 0.009 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 2.600 | 3.000 | 0.102 | 0.118 |
| E1 | 1.500 | 1.720 | 0.059 | 0.068 |
| e | 0.950 BSC | | 0.037 BSC | |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0 | 8° | 0 | 8° |

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

 **3PEAK and the 3PEAK logo are registered trademarks of 3PEAK INCORPORATED. All other trademarks are the property of their respective owners**

单击下面可查看定价，库存，交付和生命周期等信息

[>>3PEAK\(思瑞浦\)](#)