

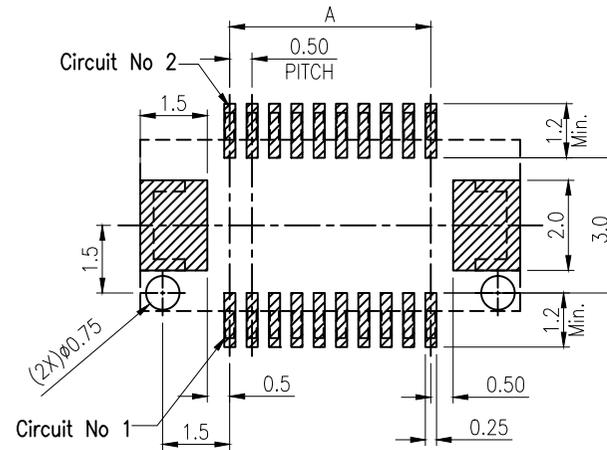
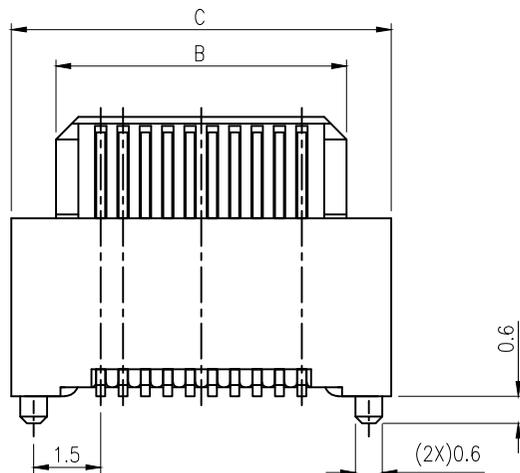
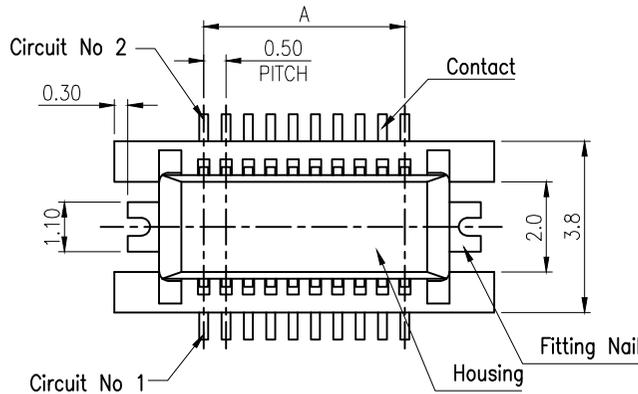


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05
WITHOUT BOSS

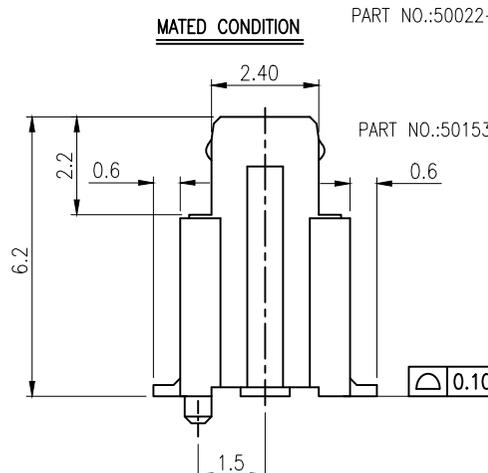

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05
WITH BOSS

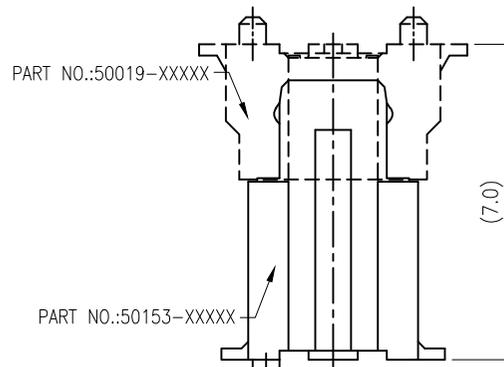

NOTES:

- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0;
 - CONTACTS: COPPER ALLOY.
 - FITTING NAIL: COPPER ALLOY.
- FINISH:
 - CONTACT:
 - 50u" MIN. NICKEL UNDERPLATING OVER ALL
 - 1:GOLD FLASH PLATING(1~3u") OVER ALL
 - N:100~200u" MATT TIN PLATING OVER ALL
 - C:15u" GOLD PLATING ON CONTACT AREA
 - D:30u" GOLD PLATING ON CONTACT AREA
 - FITTING NAIL:
 - 50u" MIN. NICKEL UNDERPLATING OVER ALL
 - 100~200u" PURE MATT TIN PLATING OVER ALL
- REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
- SPEC. PLS. REFER TO PS-50037-xxxx-xxx
- PACKAGE PLS. REFER TO 88071-xxxxA-TRP OR 88071-xxxxB-TRP

6. PART NUMBER


50153-XXX X X-XXX

NO OF CKT

XXX	Housing Color	Halogen Free	Polarization	PACKAGE
001	Black	HF	with boss	88071-xxxxB-TRP
002	Black	HF	without boss	88071-xxxxA-TRP

PACKING
0:TAPE REEL
1:TUBE PACKAGE

PLATING
1:GOLD FLASH OVER ALL
N:MATT TIN
D:30u" GOLD ON CONTACT AREA
C:15u" GOLD ON CONTACT AREA

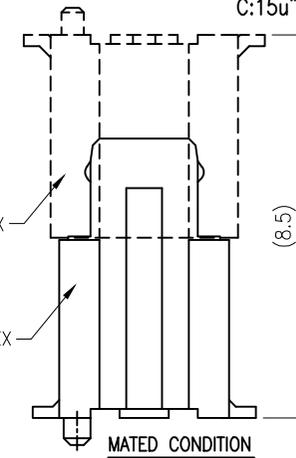

CKT	Dim A	Dim B	Dim C
16	3.5	5.5	7.5
20	4.5	6.5	8.5
30	7.0	9.0	11.0
40	9.5	11.5	13.5
50	12.0	14.0	16.0
60	14.5	16.5	18.5
70	17.0	19.0	21.0
80	19.5	21.5	23.5
100	24.5	26.5	28.5
120	29.5	31.5	33.5

一般公差 TOLERANCES X ± 0.5 XX ± 0.15 X ± 0.25 .XXX ± 0.1 ANGLES $\pm 2^\circ$	品名 (TITLE) 0.5mm BTB Rept. SMT S/T D/R TYPE	製圖 (DR) '21/08/19 HUYANG
檢驗尺寸標示 SYMBOLS \odot \ominus INDICATE CLASSIFICATION DIMENSION	圖號 (DWG.NO) 50153-XXXXX-XXX	審核 (CHKD) BRAVE
\odot MARK IS CRITICAL DIM. \ominus MARK IS MAJOR DIM.	表面處理 (FINISH)	核准 (APPD) BRAVE
比例 (SCALE) 5:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1
		SIZE A4
		REV D

宏致電子股份有限公司
Aces Electronics Co.,Ltd.

单击下面可查看定价，库存，交付和生命周期等信息

[>>ACES\(宏致\)](#)