

74HC4351; 74HCT4351

8-channel analog multiplexer/demultiplexer with latch

Rev. 3 — 9 July 2018

Product data sheet

1 General description

The 74HC4351; 74HCT4351 is a single-pole octal-throw analog switch (SP8T) suitable for use in analog or digital 8:1 multiplexer/demultiplexer applications. The switch features three digital select inputs (S0 to S2), eight independent inputs/outputs (Yn), a common input/output (Z) and two digital enable inputs ($\bar{E}1$ and E2). With $\bar{E}1$ LOW and E2 HIGH, one of the eight switches is selected (low impedance ON-state) by S0 to S2. The data at the select inputs may be latched by using the latch enable input (\bar{LE}). When \bar{LE} is HIGH the latch is transparent. When $\bar{E}1$ is HIGH or E2 is LOW all 8 analog switches are turned off. Inputs include clamp diodes. This enables the use of current limiting resistors to interface inputs to voltages in excess of V_{CC} .

2 Features and benefits

- Wide analog input voltage range from -5 V to +5 V
- Complies with JEDEC standard no. 7A
- Low ON resistance:
 - 80 Ω (typical) at $V_{CC} - V_{EE} = 4.5$ V
 - 70 Ω (typical) at $V_{CC} - V_{EE} = 6.0$ V
 - 60 Ω (typical) at $V_{CC} - V_{EE} = 9.0$ V
- Logic level translation: to enable 5 V logic to communicate with ± 5 V analog signals
- Typical 'break before make' built-in
- Address latches provided
- ESD protection:
 - HBM JESD22-A114F exceeds 2000 V
 - MM JESD22-A115-A exceeds 200 V
 - CDM JESD22-C101E exceeds 1000 V
- Specified from -40 °C to +85 °C and -40 °C to +125 °C

3 Applications

- Analog multiplexing and demultiplexing
- Digital multiplexing and demultiplexing
- Signal gating

nexperia

4 Ordering information

Table 1. Ordering information

Type number	Package			Version
	Temperature range	Name	Description	
74HC4351D	-40 °C to +125 °C	SO20	plastic small outline package; 20 leads; body width 7.5 mm	SOT163-1
74HCT4351D				
74HC4351DB	-40 °C to +125 °C	SSOP20	plastic shrink small outline package; 20 leads; body width 5.3 mm	SOT339-1
74HCT4351DB				

5 Functional diagram

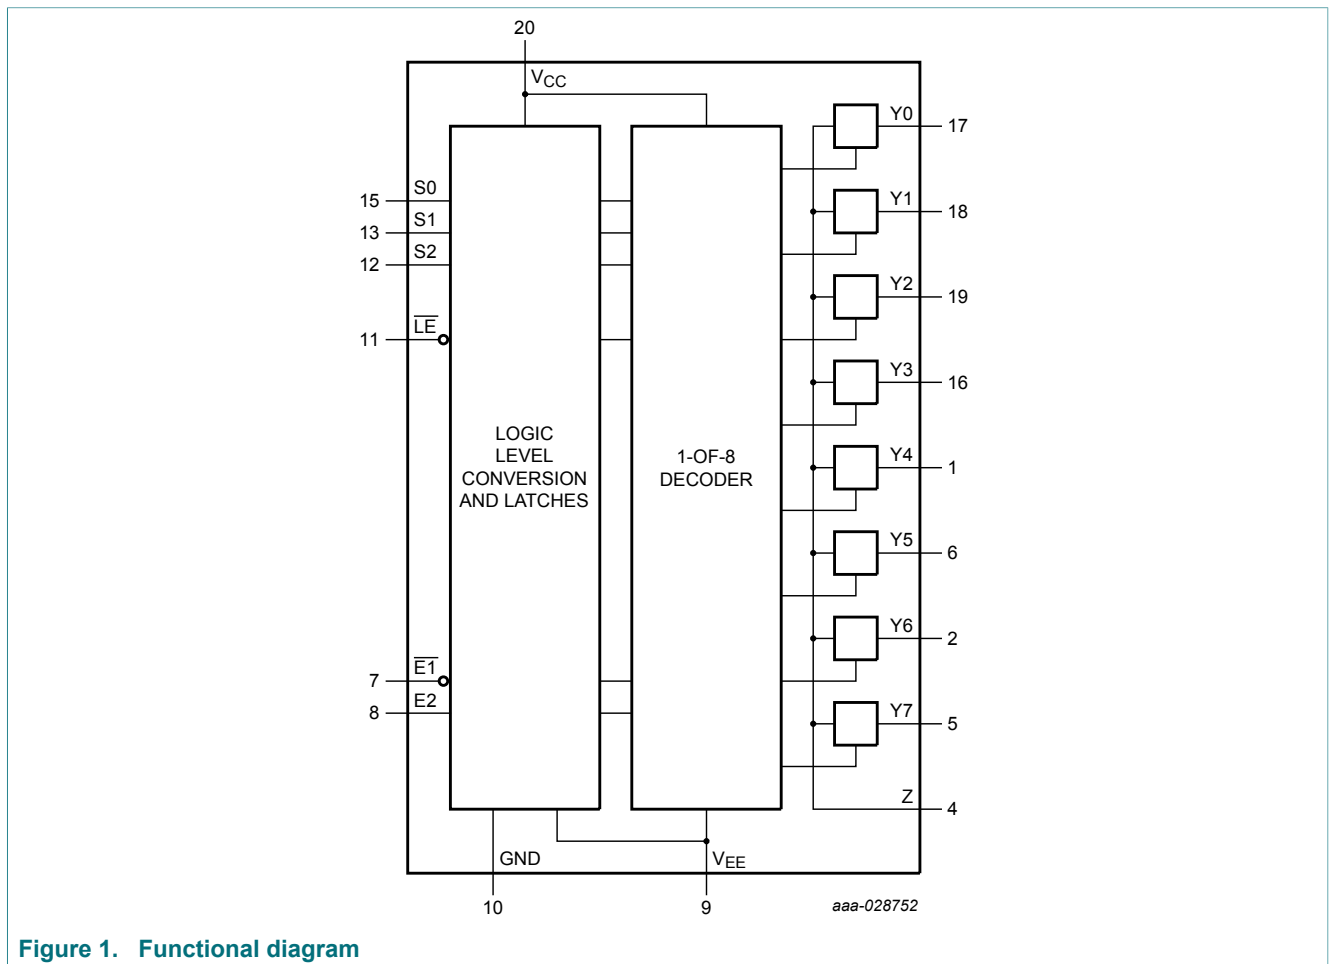


Figure 1. Functional diagram

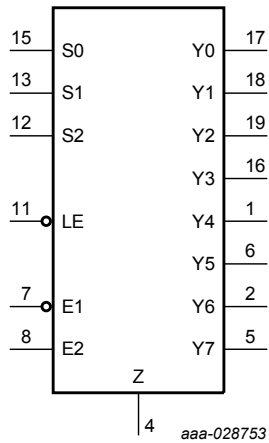


Figure 2. Logic symbol

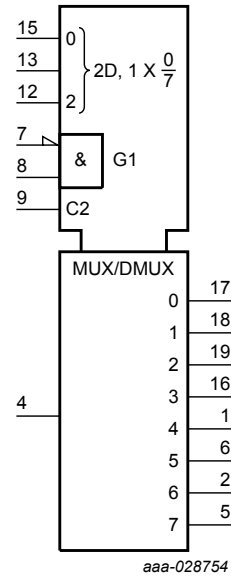


Figure 3. IEC logic symbol

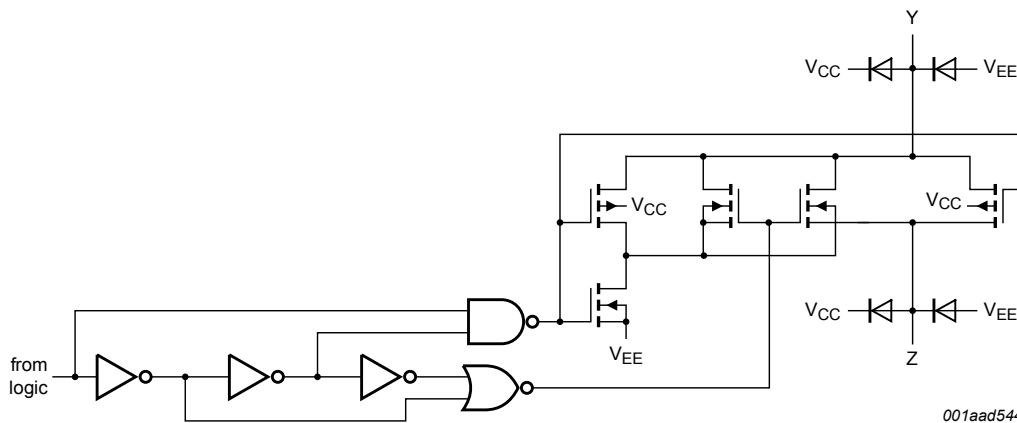


Figure 4. Schematic diagram (one switch)

6 Pinning information

6.1 Pinning

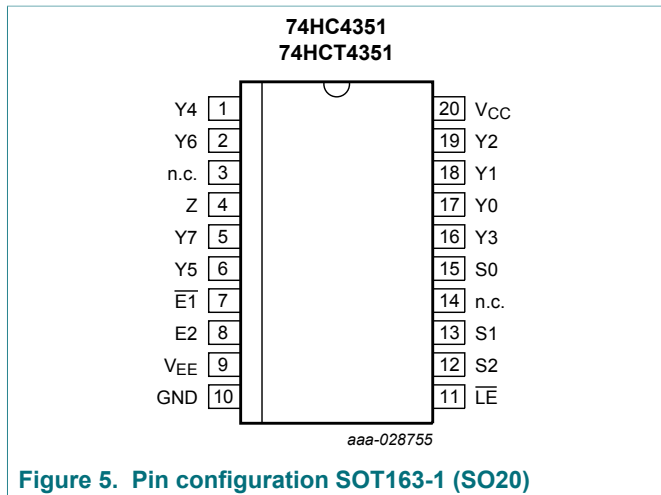


Figure 5. Pin configuration SOT163-1 (SO20)

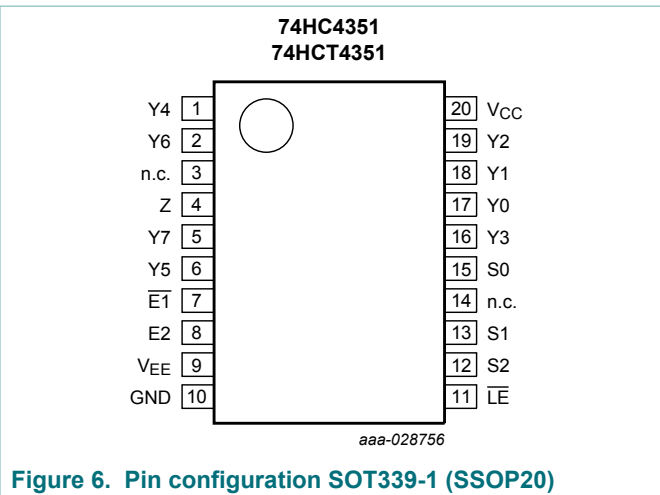


Figure 6. Pin configuration SOT339-1 (SSOP20)

6.2 Pin description

Table 2. Pin description

Symbol	Pin	Description
$\overline{E1}$	7	enable input (active LOW)
E2	8	enable input (active HIGH)
\overline{LE}	11	latch enable input (active LOW)
S0, S1, S2	15, 13, 12	select inputs
Y0, Y1, Y2, Y3, Y4, Y5, Y6, Y7	17, 18, 19, 16, 1, 6, 2, 5	independent input or output
Z	4	common output or input
V_{EE}	9	supply voltage
GND	10	ground (0 V)
V_{CC}	20	supply voltage
n.c.	3, 14	not connected

7 Functional description

Table 3. Function table

H = HIGH voltage level; L = LOW voltage level; X = don't care; ↓ = HIGH-to-LOW LE transition.

Input						Channel ON
E1	E2	LE	S2	S1	S0	
H	X	X	X	X	X	none
X	L	X	X	X	X	none
L	H	H	L	L	L	Y0
L	H	H	L	L	H	Y1
L	H	H	L	H	L	Y2
L	H	H	L	H	H	Y3
L	H	H	H	L	L	Y4
L	H	H	H	L	H	Y5
L	H	H	H	H	L	Y6
L	H	H	H	H	H	Y7
L	H	L	X	X	X	[1]
X	X	↓	X	X	X	[2]

[1] Last selected channel "ON".

[2] Select channels latched

8 Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to $V_{SS} = 0$ V (ground).

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage	[1]	-0.5	+11.0	V
I_{IK}	input clamping current	$V_I < -0.5$ V or $V_I > V_{CC} + 0.5$ V	-	±20	mA
I_{SK}	switch clamping current	$V_{SW} < -0.5$ V or $V_{SW} > V_{CC} + 0.5$ V	-	±20	mA
I_{SW}	switch current	-0.5 V < $V_{SW} < V_{CC} + 0.5$ V	-	±25	mA
I_{EE}	supply current		-	±20	mA
I_{CC}	supply current		-	50	mA
I_{GND}	ground current		-50	-	mA
T_{stg}	storage temperature		-65	+150	°C
P_{tot}	total power dissipation	SO20, SSOP20; $T_{amb} = -40$ °C to +125 °C [2]	-	500	mW
P	power dissipation	per switch	-	100	mW



[1] To avoid drawing V_{CC} current out of terminal Z, when switch current flows into terminals Yn, the voltage drop across the bidirectional switch must not exceed 0.4 V. If the switch current flows into terminal Z, no V_{CC} current will flow out of terminals Yn. In this case there is no limit for the voltage drop across the switch, but the voltages at Yn and Z may not exceed V_{CC} or V_{EE} .

[2] For SO20 packages: above 70 °C the value of P_{tot} derates linearly with 8 mW/K.
For SSOP20 packages: above 60 °C the value of P_{tot} derates linearly with 5.5 mW/K.

9 Recommended operating conditions

Table 5. Recommended operating conditions

Symbol	Parameter	Conditions	74HC4351			74HCT4351			Unit
			Min	Typ	Max	Min	Typ	Max	
V _{CC}	supply voltage	see Figure 7 and Figure 8							
		V _{CC} - GND	2.0	5.0	10.0	4.5	5.0	5.5	V
		V _{CC} - V _{EE}	2.0	5.0	10.0	2.0	5.0	10.0	V
V _I	input voltage		GND	-	V _{CC}	GND	-	V _{CC}	V
V _{SW}	switch voltage		V _{EE}	-	V _{CC}	V _{EE}	-	V _{CC}	V
T _{amb}	ambient temperature		-40	+25	+125	-40	+25	+125	°C
Δt/ΔV	input transition rise and fall rate	V _{CC} = 2.0 V	-	-	625	-	-	-	ns/V
		V _{CC} = 4.5 V	-	1.67	139	-	1.67	139	ns/V
		V _{CC} = 6.0 V	-	-	83	-	-	-	ns/V
		V _{CC} = 10.0 V	-	-	31	-	-	-	ns/V

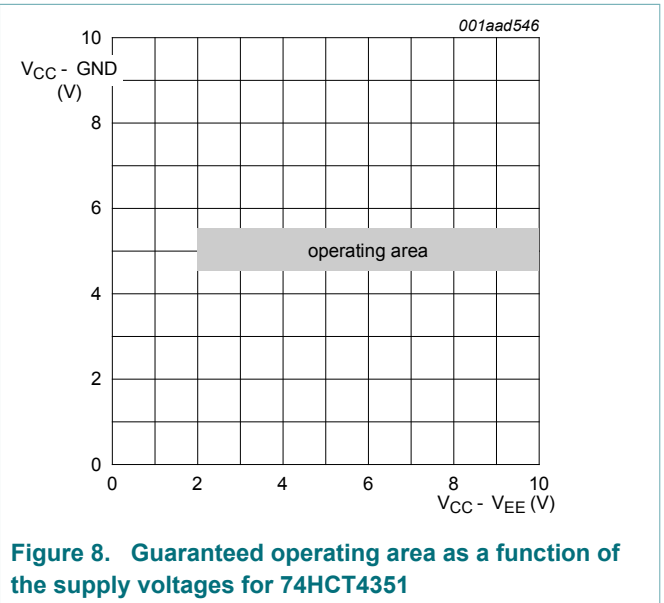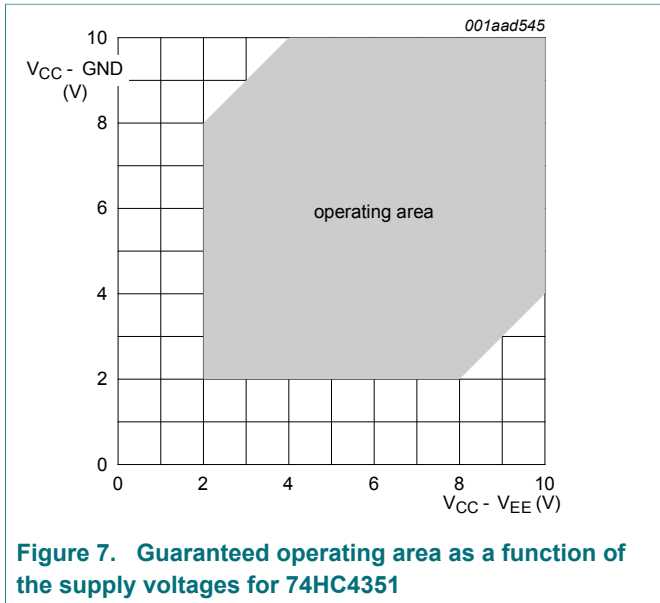

10 Static characteristics

Table 6. R_{ON} resistance per latch for 74HC4351 and 74HCT4351

For test circuit, see [Figure 9](#)

For 74HC4351: $V_I = V_{IH}$ or V_{IL} ; $V_{CC} - GND$ or $V_{CC} - V_{EE} = 2.0\text{ V}$, 4.5 V , 6.0 V and 9.0 V .

For 74HCT4351: $V_I = V_{IH}$ or V_{IL} ; $V_{CC} - GND = 4.5\text{ V}$ and 5.5 V , $V_{CC} - V_{EE} = 2.0\text{ V}$, 4.5 V , 6.0 V and 9.0 V .

Symbol	Parameter	Conditions	$T_{amb} = 25\text{ }^\circ\text{C}$			$T_{amb} = -40\text{ }^\circ\text{C}$ to $+85\text{ }^\circ\text{C}$		$T_{amb} = -40\text{ }^\circ\text{C}$ to $+125\text{ }^\circ\text{C}$		Unit
			Min	Typ	Max	Min	Max	Min	Max	
$R_{ON(peak)}$	ON resistance (peak)	$V_{is} = V_{CC}$ to V_{EE} [1]								
		$V_{CC} = 2.0\text{ V}$; $V_{EE} = 0\text{ V}$; $I_{SW} = 100\text{ }\mu\text{A}$ [2]	-	-	-	-	-	-	-	Ω
		$V_{CC} = 4.5\text{ V}$; $V_{EE} = 0\text{ V}$; $I_{SW} = 1000\text{ }\mu\text{A}$	-	100	180	-	225	-	270	Ω
		$V_{CC} = 6.0\text{ V}$; $V_{EE} = 0\text{ V}$; $I_{SW} = 1000\text{ }\mu\text{A}$	-	90	160	-	200	-	240	Ω
		$V_{CC} = 4.5\text{ V}$; $V_{EE} = -4.5\text{ V}$; $I_{SW} = 1000\text{ }\mu\text{A}$	-	70	130	-	165	-	195	Ω
$R_{ON(rail)}$	ON resistance (rail)	$V_{is} = V_{EE}$ [1]								
		$V_{CC} = 2.0\text{ V}$; $V_{EE} = 0\text{ V}$; $I_{SW} = 100\text{ }\mu\text{A}$ [2]	-	150	-	-	-	-	-	Ω
		$V_{CC} = 4.5\text{ V}$; $V_{EE} = 0\text{ V}$; $I_{SW} = 1000\text{ }\mu\text{A}$	-	80	140	-	175	-	210	Ω
		$V_{CC} = 6.0\text{ V}$; $V_{EE} = 0\text{ V}$; $I_{SW} = 1000\text{ }\mu\text{A}$	-	70	120	-	150	-	180	Ω
		$V_{CC} = 4.5\text{ V}$; $V_{EE} = -4.5\text{ V}$; $I_{SW} = 1000\text{ }\mu\text{A}$	-	60	105	-	130	-	160	Ω
		$V_{is} = V_{CC}$ [1]								
		$V_{CC} = 2.0\text{ V}$; $V_{EE} = 0\text{ V}$; $I_{SW} = 100\text{ }\mu\text{A}$ [2]	-	150	-	-	-	-	-	Ω
		$V_{CC} = 4.5\text{ V}$; $V_{EE} = 0\text{ V}$; $I_{SW} = 1000\text{ }\mu\text{A}$	-	90	160	-	200	-	240	Ω
		$V_{CC} = 6.0\text{ V}$; $V_{EE} = 0\text{ V}$; $I_{SW} = 1000\text{ }\mu\text{A}$	-	80	140	-	175	-	210	Ω
		$V_{CC} = 4.5\text{ V}$; $V_{EE} = -4.5\text{ V}$; $I_{SW} = 1000\text{ }\mu\text{A}$	-	65	120	-	150	-	180	Ω
ΔR_{ON}	ON resistance mismatch between channels	$V_{is} = V_{CC}$ to V_{EE} [1]								
		$V_{CC} = 2.0\text{ V}$; $V_{EE} = 0\text{ V}$ [2]	-	-	-	-	-	-	-	Ω
		$V_{CC} = 4.5\text{ V}$; $V_{EE} = 0\text{ V}$	-	9	-	-	-	-	-	Ω
		$V_{CC} = 6.0\text{ V}$; $V_{EE} = 0\text{ V}$	-	8	-	-	-	-	-	Ω
		$V_{CC} = 4.5\text{ V}$; $V_{EE} = -4.5\text{ V}$	-	6	-	-	-	-	-	Ω

[1] V_{is} is the input voltage at a Yn or Z terminal, whichever is assigned as an input.

[2] When supply voltages ($V_{CC} - V_{EE}$) near 2.0 V the analog switch ON resistance becomes extremely non-linear. When using a supply of 2 V, it is recommended to use these devices only for transmitting digital signals.

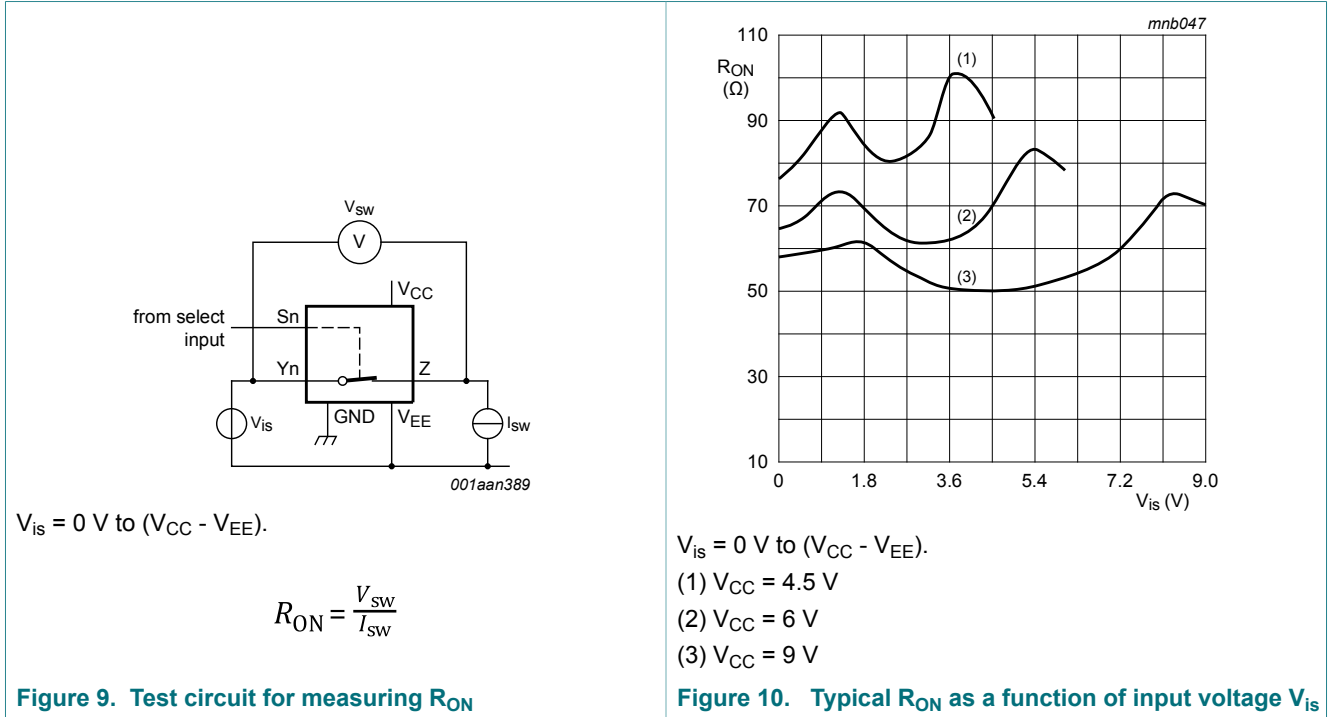


Table 7. Static characteristics

Voltages are referenced to GND (ground = 0 V);

V_{is} is the input voltage at pins Y_n or Z , whichever is assigned as an input;

V_{os} is the output voltage at pins Z or Y_n , whichever is assigned as an output.

Symbol	Parameter	Conditions	$T_{amb} = 25 \text{ }^\circ\text{C}$			$T_{amb} = -40 \text{ }^\circ\text{C to } +85 \text{ }^\circ\text{C}$		$T_{amb} = -40 \text{ }^\circ\text{C to } +125 \text{ }^\circ\text{C}$		Unit
			Min	Typ	Max	Min	Max	Min	Max	
74HC4351										
V_{IH}	HIGH-level input voltage	$V_{CC} = 2.0 \text{ V}$	1.5	1.2	-	1.5	-	1.5	-	V
		$V_{CC} = 4.5 \text{ V}$	3.15	2.4	-	3.15	-	3.15	-	V
		$V_{CC} = 6.0 \text{ V}$	4.2	3.2	-	4.2	-	4.2	-	V
		$V_{CC} = 9.0 \text{ V}$	6.3	4.7	-	6.3	-	6.3	-	V
V_{IL}	LOW-level input voltage	$V_{CC} = 2.0 \text{ V}$	-	0.8	0.5	-	0.5	-	0.5	V
		$V_{CC} = 4.5 \text{ V}$	-	2.1	1.35	-	1.35	-	1.35	V
		$V_{CC} = 6.0 \text{ V}$	-	2.8	1.8	-	1.8	-	1.8	V
		$V_{CC} = 9.0 \text{ V}$	-	4.3	2.7	-	2.7	-	2.7	V
I_I	input leakage current	$V_{EE} = 0 \text{ V}; V_I = V_{CC} \text{ or GND}$								
		$V_{CC} = 6.0 \text{ V}$	-	-	± 0.1	-	± 1.0	-	± 1.0	μA
		$V_{CC} = 10.0 \text{ V}$	-	-	± 0.2	-	± 2.0	-	± 2.0	μA

Symbol	Parameter	Conditions	T _{amb} = 25 °C			T _{amb} = -40 °C to +85 °C		T _{amb} = -40 °C to +125 °C		Unit
			Min	Typ	Max	Min	Max	Min	Max	
I _{S(OFF)}	OFF-state leakage current	V _{CC} = 10.0 V; V _{EE} = 0 V; V _I = V _{IH} or V _{IL} ; V _{SW} = V _{CC} - V _{EE} ; see Figure 11								
		per channel	-	-	±0.1	-	±1.0	-	±1.0	µA
		all channels	-	-	±0.4	-	±4.0	-	±4.0	µA
I _{S(ON)}	ON-state leakage current	V _{CC} = 10.0 V; V _{EE} = 0 V; V _I = V _{IH} or V _{IL} ; V _{SW} = V _{CC} - V _{EE} ; see Figure 12	-	-	±0.4	-	±4.0	-	±4.0	µA
I _{CC}	supply current	V _{EE} = 0 V; V _I = V _{CC} or GND; V _{is} = V _{EE} or V _{CC} ; V _{os} = V _{CC} or V _{EE}								
		V _{CC} = 6.0 V	-	-	8.0	-	80.0	-	160.0	µA
		V _{CC} = 10.0 V	-	-	16.0	-	160.0	-	320.0	µA
C _I	input capacitance		-	3.5	-	-	-	-	-	pF
C _{sw}	switch capacitance	independent pins Y _n	-	5	-	-	-	-	-	pF
		common pins Z	-	25	-	-	-	-	-	pF
74HCT4351										
V _{IH}	HIGH-level input voltage	V _{CC} = 4.5 V to 5.5 V	2.0	1.6	-	2.0	-	2.0	-	V
V _{IL}	LOW-level input voltage	V _{CC} = 4.5 V to 5.5 V	-	1.2	0.8	-	0.8	-	0.8	V
I _I	input leakage current	V _I = V _{CC} or GND; V _{CC} = 5.5 V; V _{EE} = 0 V	-	-	±0.1	-	±1.0	-	±1.0	µA
I _{S(OFF)}	OFF-state leakage current	V _{CC} = 10.0 V; V _{EE} = 0 V; V _I = V _{IH} or V _{IL} ; V _{SW} = V _{CC} - V _{EE} ; see Figure 11								
		per channel	-	-	±0.1	-	±1.0	-	±1.0	µA
		all channels	-	-	±0.4	-	±4.0	-	±4.0	µA
I _{S(ON)}	ON-state leakage current	V _{CC} = 10.0 V; V _{EE} = 0 V; V _I = V _{IH} or V _{IL} ; V _{SW} = V _{CC} - V _{EE} ; see Figure 12	-	-	±0.4	-	±4.0	-	±4.0	µA
I _{CC}	supply current	V _I = V _{CC} or GND; V _{is} = V _{EE} or V _{CC} ; V _{os} = V _{CC} or V _{EE}								
		V _{CC} = 5.5 V; V _{EE} = 0 V	-	-	8.0	-	80.0	-	160.0	µA
		V _{CC} = 5.0 V; V _{EE} = -5.0 V	-	-	16.0	-	160.0	-	320.0	µA
ΔI _{CC}	additional supply current	per input; other inputs at V _{CC} or GND; V _I = V _{CC} - 2.1 V; V _{CC} = 4.5 V to 5.5 V; V _{EE} = 0 V								
		inputs $\overline{E1}$, E2 and S _n	-	50	180	-	225	-	245	µA
		input \overline{LE}	-	150	540	-	675	-	735	µA

Symbol	Parameter	Conditions	T _{amb} = 25 °C			T _{amb} = -40 °C to +85 °C		T _{amb} = -40 °C to +125 °C		Unit
			Min	Typ	Max	Min	Max	Min	Max	
C _I	input capacitance		-	3.5	-	-	-	-	-	pF
C _{sw}	switch capacitance	independent pins Y _n	-	5	-	-	-	-	-	pF
		common pins Z	-	25	-	-	-	-	-	pF

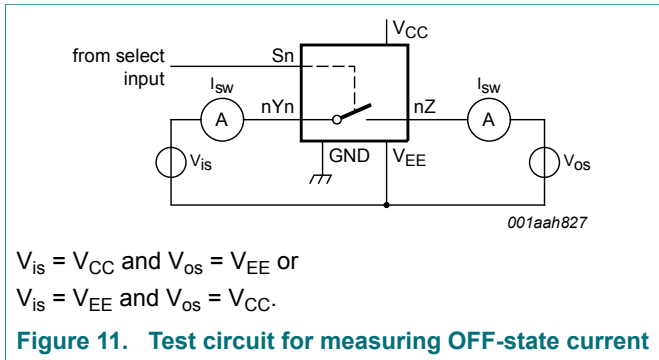


Figure 11. Test circuit for measuring OFF-state current

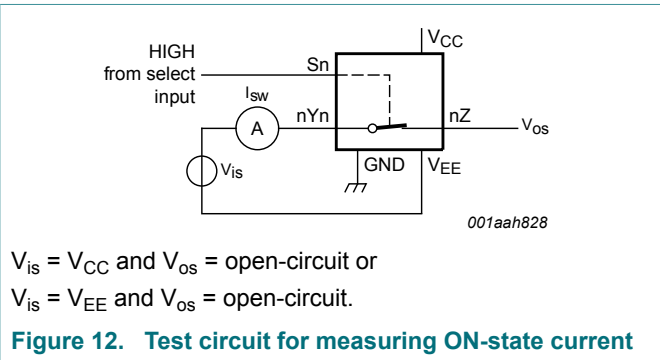


Figure 12. Test circuit for measuring ON-state current

11 Dynamic characteristics

Table 8. Dynamic characteristics

GND = 0 V; $t_r = t_f = 6$ ns; $C_L = 50$ pF; for test circuit see Figure 16.

V_{is} is the input voltage at pins Y_n or Z, whichever is assigned as an input;

V_{os} is the output voltage at pins Z or Y_n, whichever is assigned as an output.

Symbol	Parameter	Conditions	T _{amb} = 25 °C			T _{amb} = -40 °C to +85 °C		T _{amb} = -40 °C to +125 °C		Unit
			Min	Typ	Max	Min	Max	Min	Max	
74HC4351										
t _{pd}	propagation delay	V_{is} to V_{os} ; $R_L = \infty \Omega$; see Figure 13 ^[1]								
		$V_{CC} = 2.0$ V; $V_{EE} = 0$ V	-	14	60	-	75	-	90	ns
		$V_{CC} = 4.5$ V; $V_{EE} = 0$ V	-	5	12	-	15	-	18	ns
		$V_{CC} = 6.0$ V; $V_{EE} = 0$ V	-	4	10	-	13	-	15	ns
		$V_{CC} = 4.5$ V; $V_{EE} = -4.5$ V	-	4	8	-	10	-	12	ns

Symbol	Parameter	Conditions	T _{amb} = 25 °C			T _{amb} = -40 °C to +85 °C		T _{amb} = -40 °C to +125 °C		Unit
			Min	Typ	Max	Min	Max	Min	Max	
t _{on}	turn-ON time	$\overline{E1}$ to V _{os} ; R _L = 1 kΩ; see Figure 14								
		V _{CC} = 2.0 V; V _{EE} = 0 V	-	85	300	-	375	-	450	ns
		V _{CC} = 4.5 V; V _{EE} = 0 V	-	31	60	-	75	-	90	ns
		V _{CC} = 6.0 V; V _{EE} = 0 V	-	25	51	-	64	-	77	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	28	55	-	69	-	83	ns
		$E2$ to V _{os} ; R _L = 1 kΩ; see Figure 14								
		V _{CC} = 2.0 V; V _{EE} = 0 V	-	85	300	-	375	-	450	ns
		V _{CC} = 4.5 V; V _{EE} = 0 V	-	31	60	-	75	-	90	ns
		V _{CC} = 6.0 V; V _{EE} = 0 V	-	25	51	-	64	-	77	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	25	55	-	69	-	83	ns
		\overline{LE} to V _{os} ; R _L = 1 kΩ; see Figure 14								
		V _{CC} = 2.0 V; V _{EE} = 0 V	-	91	300	-	375	-	450	ns
		V _{CC} = 4.5 V; V _{EE} = 0 V	-	33	60	-	75	-	90	ns
		V _{CC} = 6.0 V; V _{EE} = 0 V	-	26	51	-	64	-	77	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	27	55	-	69	-	83	ns
		S_n to V _{os} ; R _L = 1 kΩ; see Figure 14								
		V _{CC} = 2.0 V; V _{EE} = 0 V	-	88	300	-	375	-	450	ns
		V _{CC} = 4.5 V; V _{EE} = 0 V	-	32	60	-	75	-	90	ns
		V _{CC} = 6.0 V; V _{EE} = 0 V	-	26	51	-	64	-	77	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	25	50	-	63	-	75	ns

Symbol	Parameter	Conditions	T _{amb} = 25 °C			T _{amb} = -40 °C to +85 °C		T _{amb} = -40 °C to +125 °C		Unit
			Min	Typ	Max	Min	Max	Min	Max	
t _{off}	turn-OFF time	$\overline{E1}$ to V _{os} ; R _L = 1 kΩ; see Figure 14								
		V _{CC} = 2.0 V; V _{EE} = 0 V	-	69	250	-	315	-	375	ns
		V _{CC} = 4.5 V; V _{EE} = 0 V	-	25	50	-	63	-	75	ns
		V _{CC} = 6.0 V; V _{EE} = 0 V	-	20	43	-	54	-	64	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	20	40	-	50	-	60	ns
		$\overline{E2}$ to V _{os} ; R _L = 1 kΩ; see Figure 14								
		V _{CC} = 2.0 V; V _{EE} = 0 V	-	72	250	-	315	-	375	ns
		V _{CC} = 4.5 V; V _{EE} = 0 V	-	26	50	-	63	-	75	ns
		V _{CC} = 6.0 V; V _{EE} = 0 V	-	21	43	-	54	-	64	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	19	40	-	50	-	60	ns
		\overline{LE} to V _{os} ; R _L = 1 kΩ; see Figure 14								
		V _{CC} = 2.0 V; V _{EE} = 0 V	-	83	275	-	345	-	415	ns
		V _{CC} = 4.5 V; V _{EE} = 0 V	-	30	55	-	69	-	83	ns
		V _{CC} = 6.0 V; V _{EE} = 0 V	-	24	47	-	59	-	71	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	26	45	-	56	-	68	ns
		\overline{Sn} to V _{os} ; R _L = 1 kΩ; see Figure 14								
V _{CC} = 2.0 V; V _{EE} = 0 V	-	80	275	-	345	-	415	ns		
V _{CC} = 4.5 V; V _{EE} = 0 V	-	29	55	-	69	-	83	ns		
V _{CC} = 6.0 V; V _{EE} = 0 V	-	23	47	-	59	-	71	ns		
V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	24	48	-	60	-	72	ns		
t _{su}	set-up time	\overline{Sn} to \overline{LE} ; R _L = 1 kΩ; see Figure 15								
		V _{CC} = 2.0 V; V _{EE} = 0 V	60	17	-	-	75	-	90	ns
		V _{CC} = 4.5 V; V _{EE} = 0 V	12	6	-	-	15	-	18	ns
		V _{CC} = 6.0 V; V _{EE} = 0 V	10	5	-	-	13	-	15	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	18	9	-	-	23	-	27	ns
t _{hold}	hold time	\overline{Sn} to \overline{LE} ; R _L = 1 kΩ; see Figure 15								
		V _{CC} = 2.0 V; V _{EE} = 0 V	5	-8	-	-	5	-	5	ns
		V _{CC} = 4.5 V; V _{EE} = 0 V	5	-3	-	-	5	-	5	ns
		V _{CC} = 6.0 V; V _{EE} = 0 V	5	-2	-	-	5	-	5	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	5	-4	-	-	5	-	5	ns
t _{WH(min)}	minimum pulse width HIGH	\overline{LE} ; R _L = 1 kΩ; see Figure 15								
		V _{CC} = 2.0 V; V _{EE} = 0 V	100	11	-	-	125	-	150	ns
		V _{CC} = 4.5 V; V _{EE} = 0 V	20	1	-	-	25	-	30	ns
		V _{CC} = 6.0 V; V _{EE} = 0 V	17	3	-	-	21	-	26	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	25	7	-	-	31	-	38	ns

Symbol	Parameter	Conditions	T _{amb} = 25 °C			T _{amb} = -40 °C to +85 °C		T _{amb} = -40 °C to +125 °C		Unit
			Min	Typ	Max	Min	Max	Min	Max	
C _{pd}	power dissipation capacitance	per switch; V _I = GND to V _{CC} ^[2]	-	25	-	-	-	-	-	pF
C _{sw}	switch capacitance	maximum								
		independent (Yn)	-	5	-	-	-	-	-	pF
		common (Z)	-	25	-	-	-	-	-	pF
74HCT4351										
t _{pd}	propagation delay	V _{is} to V _{os} ; R _L = ∞ Ω; see Figure 13 ^[1]								
		V _{CC} = 4.5 V; V _{EE} = 0 V	-	6	12	-	15	-	18	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	4	8	-	10	-	12	ns
t _{on}	turn-ON time	E1 to V _{os} ; R _L = 1 kΩ; see Figure 14								
		V _{CC} = 4.5 V; V _{EE} = 0 V	-	40	75	-	94	-	113	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	31	60	-	75	-	90	ns
		E2 to V _{os} ; R _L = 1 kΩ; see Figure 14								
		V _{CC} = 4.5 V; V _{EE} = 0 V	-	35	70	-	88	-	105	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	26	50	-	63	-	75	ns
		LE to V _{os} ; R _L = 1 kΩ; see Figure 14								
		V _{CC} = 4.5 V; V _{EE} = 0 V	-	42	75	-	94	-	113	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	37	60	-	75	-	90	ns
		Sn to V _{os} ; R _L = 1 kΩ; see Figure 14								
V _{CC} = 4.5 V; V _{EE} = 0 V	-	39	75	-	94	-	113	ns		
V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	30	60	-	75	-	90	ns		
t _{off}	turn-OFF time	E1 to V _{os} ; R _L = 1 kΩ; see Figure 14								
		V _{CC} = 4.5 V; V _{EE} = 0 V	-	27	55	-	69	-	83	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	20	40	-	50	-	60	ns
		E2 to V _{os} ; R _L = 1 kΩ; see Figure 14								
		V _{CC} = 4.5 V; V _{EE} = 0 V	-	32	60	-	75	-	90	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	26	50	-	63	-	75	ns
		LE to V _{os} ; R _L = 1 kΩ; see Figure 14								
		V _{CC} = 4.5 V; V _{EE} = 0 V	-	33	60	-	75	-	90	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	30	55	-	69	-	83	ns
		Sn to V _{os} ; R _L = 1 kΩ; see Figure 14								
V _{CC} = 4.5 V; V _{EE} = 0 V	-	33	65	-	81	-	98	ns		
V _{CC} = 4.5 V; V _{EE} = -4.5 V	-	29	55	-	69	-	83	ns		
t _{su}	set-up time	Sn to LE; R _L = 1 kΩ; see Figure 15								
		V _{CC} = 4.5 V; V _{EE} = 0 V	12	6	-	-	15	-	18	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	14	7	-	-	18	-	21	ns

Symbol	Parameter	Conditions	T _{amb} = 25 °C			T _{amb} = -40 °C to +85 °C		T _{amb} = -40 °C to +125 °C		Unit
			Min	Typ	Max	Min	Max	Min	Max	
t _{hold}	hold time	Sn to \overline{LE} ; R _L = 1 kΩ; see Figure 15								
		V _{CC} = 4.5 V; V _{EE} = 0 V	5	-1	-	-	5	-	5	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	5	-2	-	-	5	-	5	ns
t _{WH(min)}	minimum pulse width HIGH	\overline{LE} ; R _L = 1 kΩ; see Figure 15								
		V _{CC} = 4.5 V; V _{EE} = 0 V	25	13	-	-	31	-	38	ns
		V _{CC} = 4.5 V; V _{EE} = -4.5 V	25	13	-	-	31	-	38	ns
C _{pd}	power dissipation capacitance	per switch; V _I = GND to V _{CC} - 1.5 V ^[2]	-	25	-	-	-	-	-	pF
C _{sw}	switch capacitance	maximum								
		independent (Yn)	-	5	-	-	-	-	-	pF
		common (Z)	-	25	-	-	-	-	-	pF

[1] t_{pd} is the same as t_{PHL} and t_{PLH}.
 [2] C_{PD} is used to determine the dynamic power dissipation (P_D in μW).
 $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma\{(C_L + C_{sw}) \times V_{CC}^2 \times f_o\}$ where:
 f_i = input frequency in MHz;
 f_o = output frequency in MHz;
 N = number of inputs switching;
 $\Sigma\{(C_L + C_{sw}) \times V_{CC}^2 \times f_o\}$ = sum of outputs;
 C_L = output load capacitance in pF;
 C_{sw} = switch capacitance in pF;
 V_{CC} = supply voltage in V.

11.1 Waveforms and test circuit

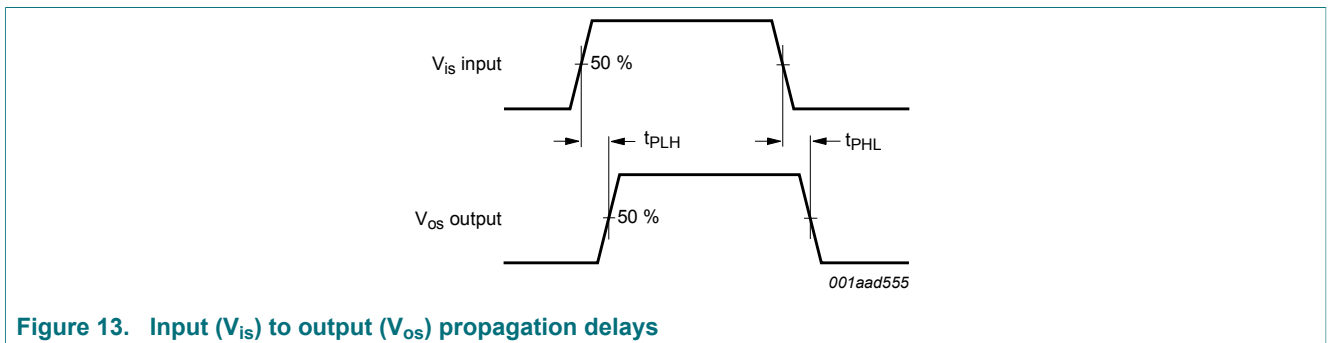


Figure 13. Input (V_{is}) to output (V_{os}) propagation delays

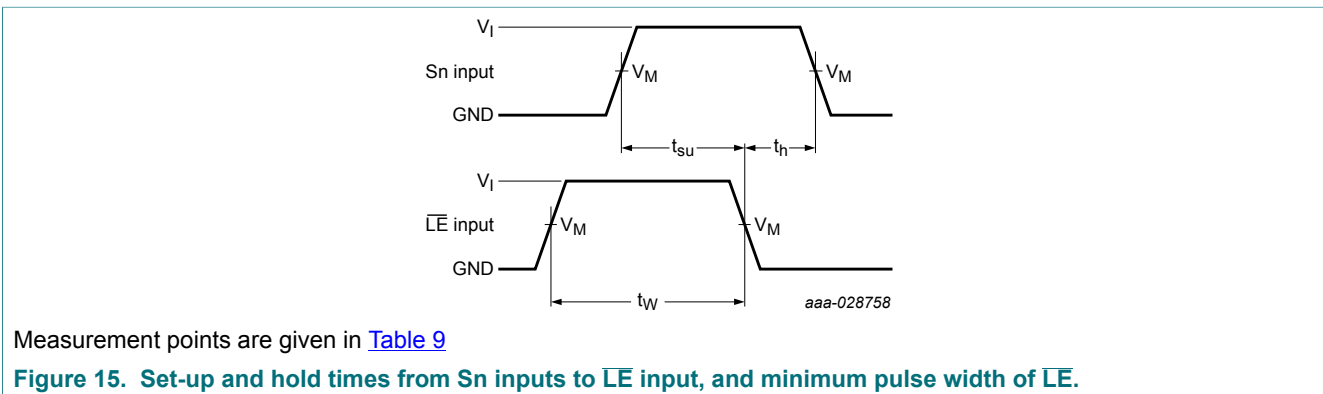
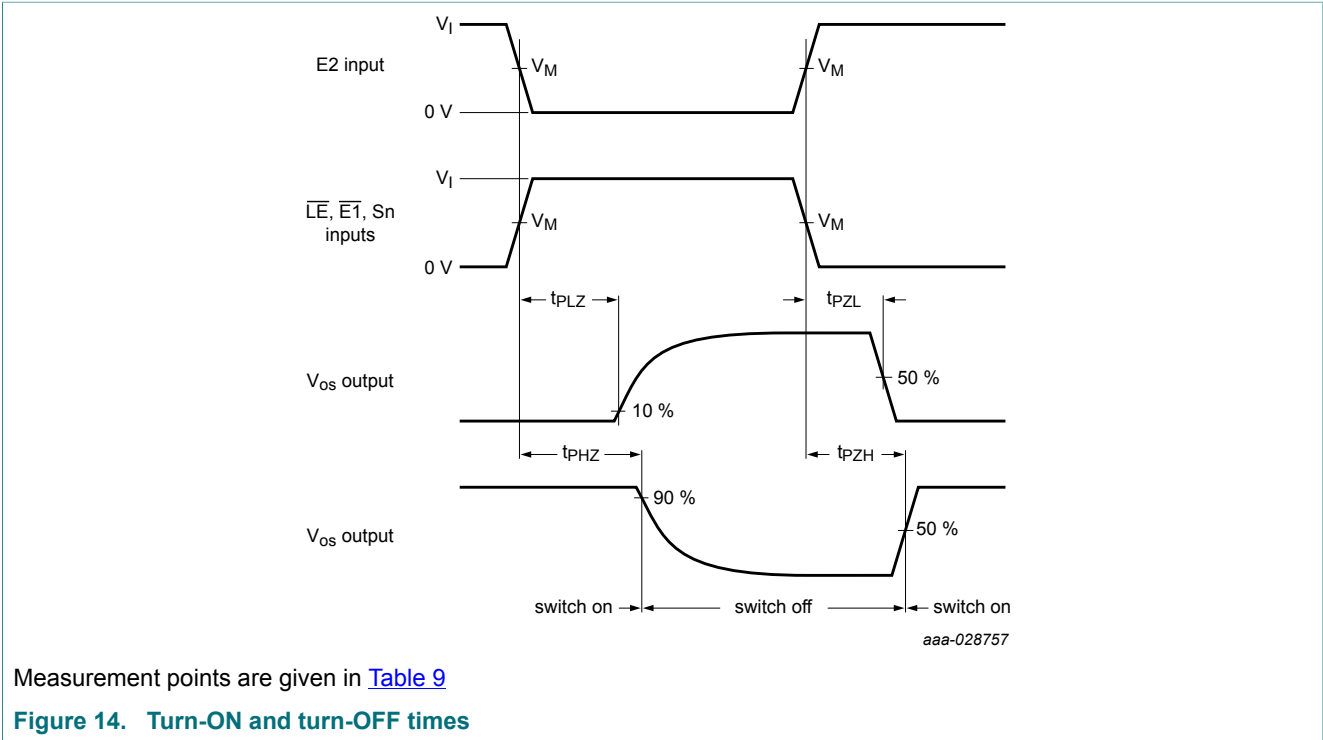


Table 9. Measurement points

Type	Input		Output
	V _I	V _M	V _M
74HC4351	GND to V _{CC}	0.5 x V _{CC}	0.5 x V _{CC}
74HCT4351	GND to 3 V	1.3 V	1.3 V

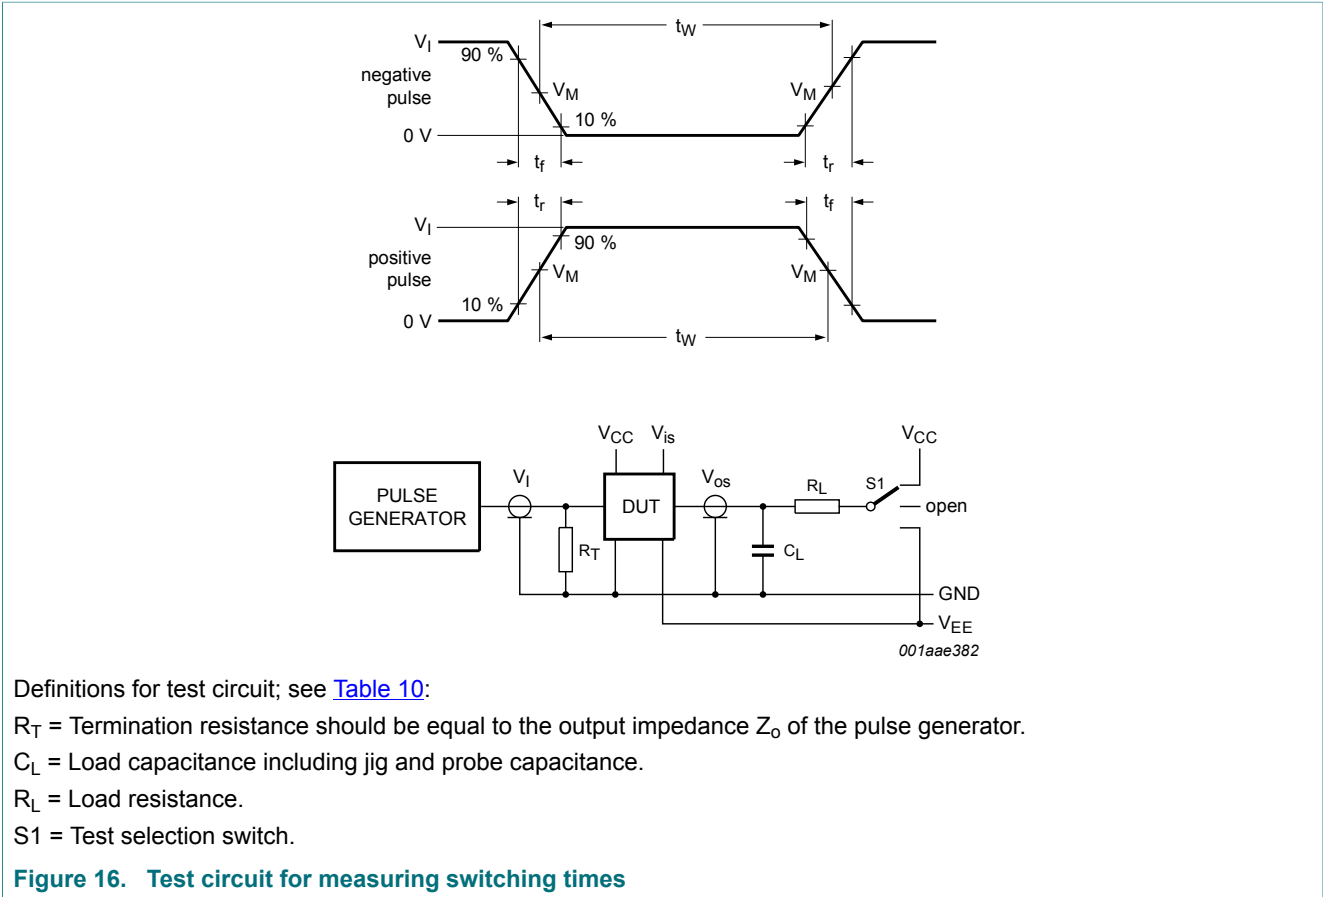


Table 10. Test data

Test	Input		t_r, t_f		Load		S1 position
	V_I	V_{is}	at f_{max}	other ^[1]	C_L	R_L	
t_{PZH}, t_{PHZ}	[2]	V_{CC}	< 2 ns	6 ns	50 pF	1 k Ω	V_{EE}
t_{PZL}, t_{PLZ}	[2]	V_{EE}	< 2 ns	6 ns	50 pF	1 k Ω	V_{CC}
Other	[2]	pulse	< 2 ns	6 ns	50 pF	1 k Ω	open

[1] $t_r = t_f = 6$ ns; when measuring f_{max} , there is no constraint to t_r and t_f with 50 % duty factor.

[2] V_I values:

For 74HC4351: $V_I = V_{CC}$

For 74HCT4351: $V_I = 3$ V

11.2 Additional dynamic characteristics

Table 11. Additional dynamic characteristics

Recommended conditions and typical values; $GND = 0\text{ V}$; $T_{amb} = 25\text{ }^\circ\text{C}$; $C_L = 50\text{ pF}$ unless stated otherwise.

V_{is} is the input voltage at pins Y_n or Z , whichever is assigned as an input.

V_{os} is the output voltage at pins Y_n or Z , whichever is assigned as an output.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit	
d_{sin}	sine-wave distortion	$f_i = 1\text{ kHz}$; $R_L = 10\text{ k}\Omega$; see Figure 17					
		$V_{is} = 4.0\text{ V (p-p)}$; $V_{CC} = 2.25\text{ V}$; $V_{EE} = -2.25\text{ V}$	-	0.04	-	%	
		$V_{is} = 8.0\text{ V (p-p)}$; $V_{CC} = 4.5\text{ V}$; $V_{EE} = -4.5\text{ V}$	-	0.02	-	%	
		$f_i = 10\text{ kHz}$; $R_L = 10\text{ k}\Omega$; see Figure 17					
		$V_{is} = 4.0\text{ V (p-p)}$; $V_{CC} = 2.25\text{ V}$; $V_{EE} = -2.25\text{ V}$	-	0.12	-	%	
		$V_{is} = 8.0\text{ V (p-p)}$; $V_{CC} = 4.5\text{ V}$; $V_{EE} = -4.5\text{ V}$	-	0.06	-	%	
α_{iso}	isolation (OFF-state)	$R_L = 600\ \Omega$; $f_i = 1\text{ MHz}$; see Figure 18					
		$V_{CC} = 2.25\text{ V}$; $V_{EE} = -2.25\text{ V}$	[1]	-	-50	-	dB
		$V_{CC} = 4.5\text{ V}$; $V_{EE} = -4.5\text{ V}$	[1]	-	-50	-	dB
V_{ct}	crosstalk voltage	between control and any switch (peak-to-peak value); $R_L = 600\ \Omega$; $f_i = 1\text{ MHz}$; ($\overline{E1}$, $E2$ or S_n square wave between V_{CC} and GND); $t_r = t_f = 6\text{ ns}$; see Figure 19					
		$V_{CC} = 4.5\text{ V}$; $V_{EE} = 0\text{ V}$	-	120	-	mV	
		$V_{CC} = 4.5\text{ V}$; $V_{EE} = -4.5\text{ V}$	-	220	-	mV	
$f_{(-3dB)}$	-3 dB frequency response	$R_L = 50\ \Omega$; $C_L = 10\text{ pF}$ see Figure 20					
		$V_{CC} = 2.25\text{ V}$; $V_{EE} = -2.25\text{ V}$	[2]	-	160	-	MHz
		$V_{CC} = 4.5\text{ V}$; $V_{EE} = -4.5\text{ V}$	[2]	-	170	-	MHz

[1] Adjust input voltage V_{is} to 0 dBm level (0 dBm = 1 mW into 600 Ω).

[2] Adjust input voltage V_{is} to 0 dBm level at V_{os} for 1 MHz (0 dBm = 1 mW into 50 Ω).



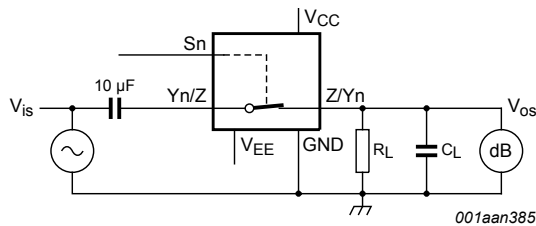


Figure 17. Test circuit for measuring sine-wave distortion

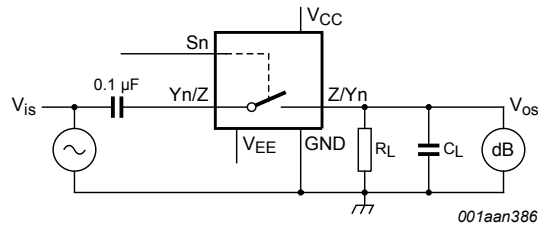

$V_{CC} = 4.5\text{ V}$; $GND = 0\text{ V}$; $V_{EE} = -4.5\text{ V}$; $R_L = 600\ \Omega$; $R_S = 1\text{ k}\Omega$.

a. Test circuit

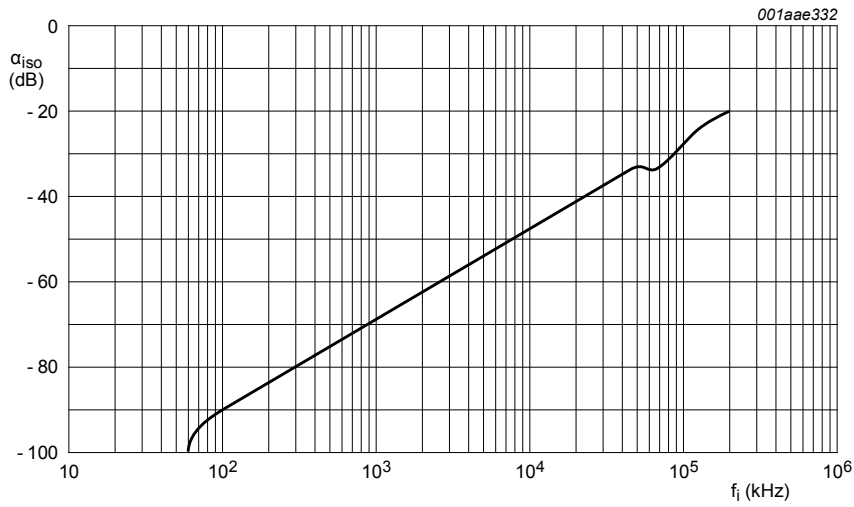

b. Isolation (OFF-state) as a function of frequency

Figure 18. Test circuit for measuring isolation (OFF-state)



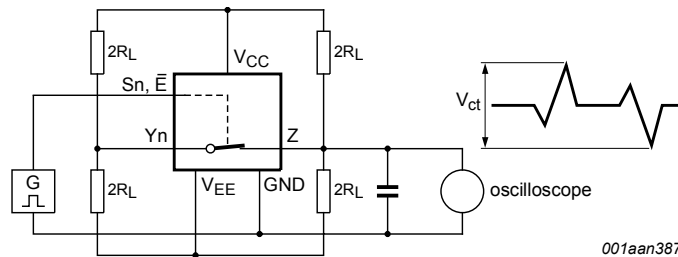


Figure 19. Test circuit for measuring crosstalk between control input and any switch

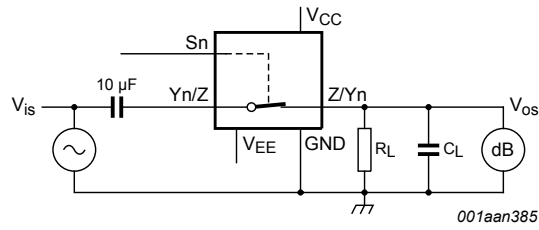

$V_{CC} = 4.5\text{ V}$; $GND = 0\text{ V}$; $V_{EE} = -4.5\text{ V}$; $R_L = 50\ \Omega$; $R_S = 1\text{ k}\Omega$.

a. Test circuit

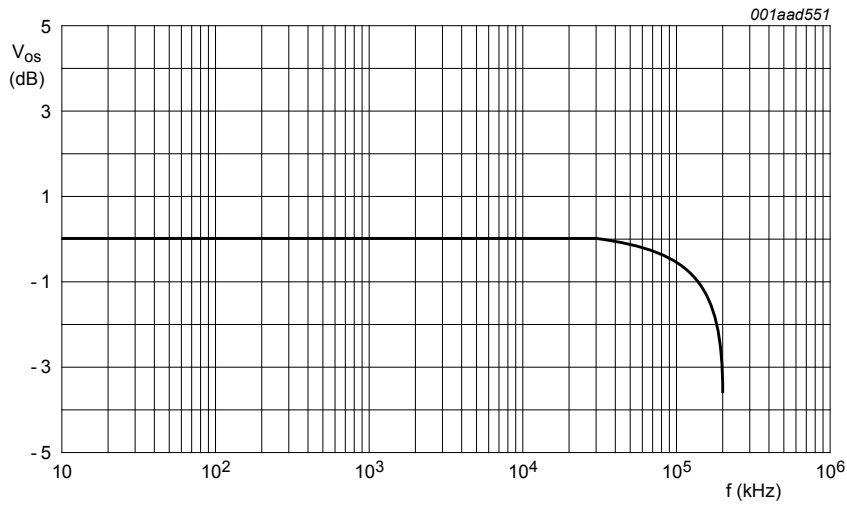


b. Typical frequency response

Figure 20. Test circuit for frequency response

12 Package outline

SO20: plastic small outline package; 20 leads; body width 7.5 mm

SOT163-1

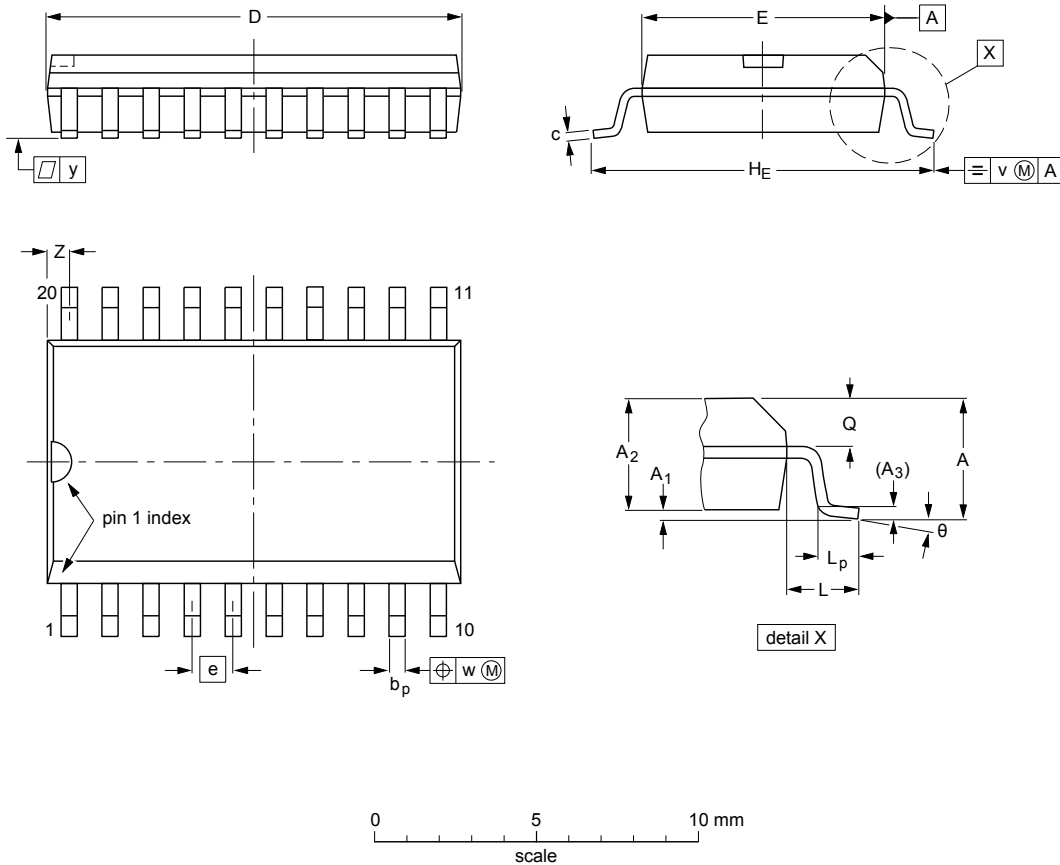

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A ₁	A ₂	A ₃	b _p	c	D ⁽¹⁾	E ⁽¹⁾	e	H _E	L	L _p	Q	v	w	y	Z ⁽¹⁾	θ
mm	2.65	0.3 0.1	2.45 2.25	0.25	0.49 0.36	0.32 0.23	13.0 12.6	7.6 7.4	1.27	10.65 10.00	1.4	1.1 0.4	1.1 1.0	0.25	0.25	0.1	0.9 0.4	8° 0°
inches	0.1	0.012 0.004	0.096 0.089	0.01	0.019 0.014	0.013 0.009	0.51 0.49	0.30 0.29	0.05	0.419 0.394	0.055	0.043 0.016	0.043 0.039	0.01	0.01	0.004	0.035 0.016	

Note


1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT163-1	075E04	MS-013				99-12-27 03-02-19

Figure 21. Package outline SOT163-1 (SO20)

SSOP20: plastic shrink small outline package; 20 leads; body width 5.3 mm

SOT339-1

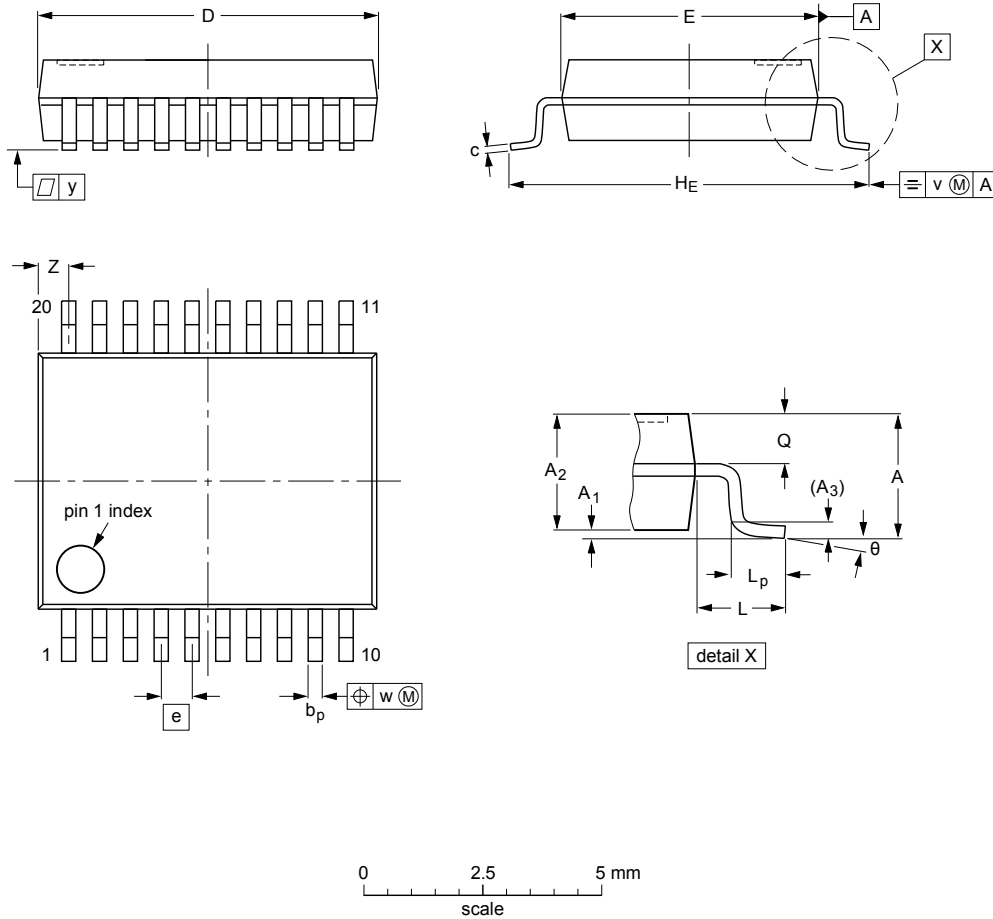

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A ₁	A ₂	A ₃	b _p	c	D ⁽¹⁾	E ⁽¹⁾	e	H _E	L	L _p	Q	v	w	y	Z ⁽¹⁾	θ
mm	2	0.21 0.05	1.80 1.65	0.25	0.38 0.25	0.20 0.09	7.4 7.0	5.4 5.2	0.65	7.9 7.6	1.25	1.03 0.63	0.9 0.7	0.2	0.13	0.1	0.9 0.5	8° 0°

Note

1. Plastic or metal protrusions of 0.2 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT339-1		MO-150				99-12-27 03-02-19

Figure 22. Package outline SOT339-1 (SSOP20)

13 Abbreviations

Table 12. Abbreviations

Acronym	Description
CDM	Charged Device Model
DUT	Device Under Test
ESD	ElectroStatic Discharge
HBM	Human Body Model
MM	Machine Model

14 Revision history

Table 13. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
74HC_HCT4351 v.3	20180709	Product data sheet	-	74HC_HCT4351 v.2
Modifications:	<ul style="list-style-type: none"> The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia. Legal texts have been adapted to the new company name where appropriate. Type numbers 74HC4351N (SOT146-1) and 74HCT4351N (SOT146-1) removed. 			
74HC_HCT4351 v.2	19901201	Product specification	-	74HC_HCT4351 v.1

15 Legal information

15.1 Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nexperia.com>.

15.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

15.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia. In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical

systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications. In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer

design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

15.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Contents

1	General description	1
2	Features and benefits	1
3	Applications	1
4	Ordering information	2
5	Functional diagram	2
6	Pinning information	4
6.1	Pinning	4
6.2	Pin description	4
7	Functional description	5
8	Limiting values	5
9	Recommended operating conditions	6
10	Static characteristics	7
11	Dynamic characteristics	10
11.1	Waveforms and test circuit	14
11.2	Additional dynamic characteristics	17
12	Package outline	20
13	Abbreviations	22
14	Revision history	22
15	Legal information	23

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© Nexperia B.V. 2018.

All rights reserved.

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: salesaddresses@nexperia.com

Date of release: 9 July 2018

Document identifier: 74HC_HCT4351

单击下面可查看定价，库存，交付和生命周期等信息

[>>Nexperia\(安世\)](#)