

Notification about the transfer of the semiconductor business

The semiconductor business of Panasonic Corporation was transferred on September 1, 2020 to Nuvoton Technology Corporation (hereinafter referred to as "Nuvoton"). Accordingly, Panasonic Semiconductor Solutions Co., Ltd. became under the umbrella of the Nuvoton Group, with the new name of Nuvoton Technology Corporation Japan (hereinafter referred to as "NTCJ").

In accordance with this transfer, semiconductor products will be handled as NTCJ-made products after September 1, 2020. However, such products will be continuously sold through Panasonic Corporation.

Publisher of this Document is NTCJ.

If you would find description "Panasonic" or "Panasonic semiconductor solutions", please replace it with NTCJ.

※ Except below description page

"Request for your special attention and precautions in using the technical information and semiconductors described in this book"

Nuvoton Technology Corporation Japan

□ MN101C74 Series

Type	MN101C74F	MN101C74G	MN101CF74G
Internal ROM type	Mask ROM		FLASH
ROM (byte)	96K	128K	
RAM (byte)	6K		
Package (Lead-free)	LQFP100-P-1414, MLGA100-L-1010, QFP100-P-1818B		
Minimum Instruction Execution Time	0.1 μs (at 3.0 V to 3.6 V, 10 MHz) 0.235 μs (at 1.8 V to 3.6 V, 4.25 MHz)* 62.5 μs (at 1.8 V to 3.6 V, 32 kHz)* *: The lower limit for operation guarantee for flash memory built-in type is 2.2 V.		

■ Interrupts

RESET. Watchdog. External 0 to 5. External 6 (key interrupt dedicated). Timer 0 to 3. Timer 6. Timer 7 (2 systems). Timer 8 (2 systems). Time base. Serial 0 (2 systems). Serial 1 (2 systems). Serial 3. Serial 4. A/D conversion finish. Automatic transfer finish

■ Timer Counter

8-bit timer × 5

Timer 0Square-wave/8-bit PWM output. Event count. Remote control carrier output. Simple pulse width measurement. Added pulse (2-bit) type PWM output. Square-wave/PWM output to large current terminal PC3 possible

Timer 1Square-wave output. Event count. Synchronous output event

Timer 2Square-wave output. Added pulse (2-bit) type PWM output. PWM output. Serial transfer clock output. Event count. Synchronous output event. Simple pulse width measurement. Square-wave/PWM output to large current terminal PC5 possible

Timer 3Square-wave output. Event count. Serial transfer clock output

Timer 68-bit freerun timer

Timer 0, 1 can be cascade-connected

Timer 2, 3 can be cascade-connected

16-bit timer × 2

Timer 7Square-wave output. 16-bit PWM output (cycle/duty continuous variable). Event count. Synchronous output event. Pulse width measurement. Input capture. Real time output control. High performance IGBT output. Square-wave/PWM output to large current terminal PC4 possible

Timer 8Square-wave/16-bit PWM output (duty continuous variable). Event count. Pulse width measurement. Input capture. Square-wave/PWM output to large current terminal PC6 possible

Timer 7, 8 can be cascade-connected: Square-wave output, PWM is possible as a 32-bit timer

Time base timer: One-minute count setting

Watchdog timer × 1

■ Serial interface

Synchronous type/UART (full-duplex) × 2: Serial 0, 1

Synchronous type/Single-master I²C × 1: Serial 3

I²C slave × 1: Serial 4

Serial 4.....I²C high-speed transfer mode. 7-bit/10-bit address setting. General call

■ DMA controller

Maximum transfer cycles: 255

Starting factor: External request. Various types of interrupt. Software

Transfer mode: 1-byte transfer. Word transfer. Burst transfer

■ I/O Pins

I/O 87 : Common use. Specified pull-up resistor available. Input/output selectable (bit unit)

■ A/D converter

10-bit × 16 channels (with S/H)

■ Display control function

LCD: 47 segments × 4 commons (Static, 1/2, 1/3, or 1/4 duty)

LCD power supply separated from VDD (usable if VDD ≤ VLCD ≤ 3.6 V)

LCD power step-up circuit contained (3/2 times, 2 times and 3 times)

LCD power shunt resistance contained

■ Special Ports

Buzzer output. Inverted buzzer output. Remote control carrier output. High-current drive port

■ ROM Correction


Correcting address designation: Up to 7 addresses possible

■ Electrical Characteristics (Supply current)

Parameter	Symbol	Condition	Limit			Unit
			min	typ	max	
Operating supply current	IDD1	fosc = 4 MHz. VDD = 3 V		1.1	1.9	mA
	IDD2	fx = 32 kHz. VDD = 3 V		6	20	μA
Supply current at HALT	IDD3	fx = 32 kHz. VDD = 3 V. Ta = 25 °C		3	6	μA
	IDD4	fx = 32 kHz. VDD = 3 V. Ta = -40 °C to +85 °C			13	μA
Supply current at STOP	IDD5	VDD = 3 V. Ta = 25 °C			2	μA
	IDD6	VDD = 3 V. Ta = -40 °C to +85 °C			10	μA

■ Pin Assignment

QFP100-P-1818B, LQFP100-P-1414, MLGA100-L-1010

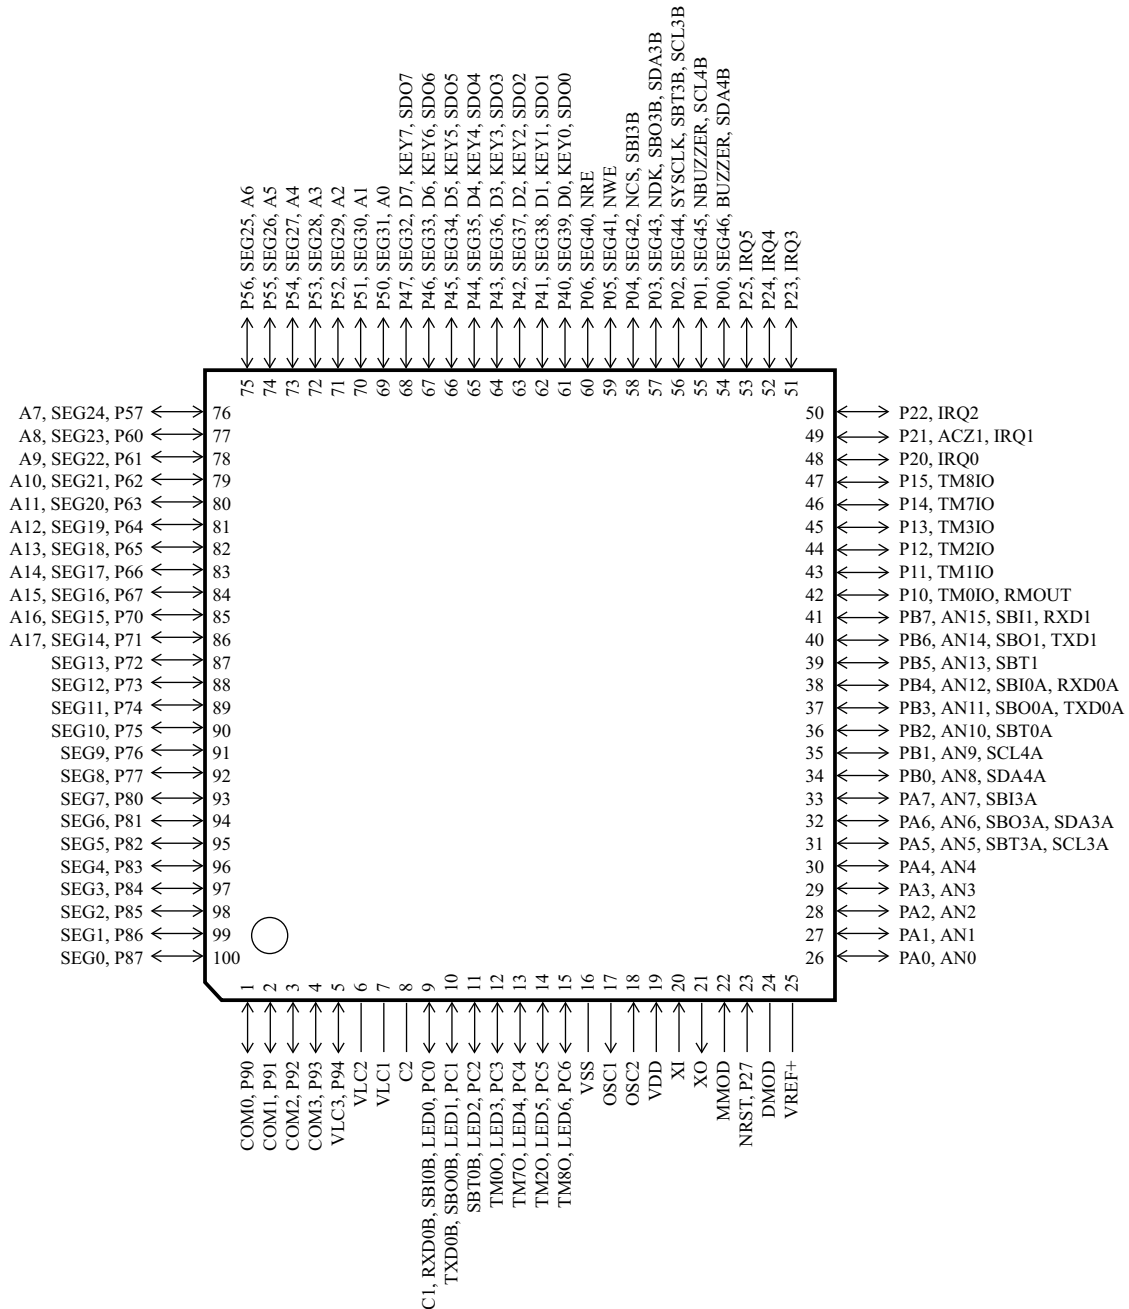

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation, Nuvoton Technology Corporation Japan or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information de-scribed in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book.
Please consult with our sales staff in advance for information on the following applications, moreover please exchange documents separately on terms of use etc.: Special applications (such as for in-vehicle equipment, airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, medical equipment and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
Unless exchanging documents on terms of use etc. in advance, it is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. We do not guarantee quality for disassembled products or the product re-mounted after removing from the mounting board.
When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) When reselling products described in this book to other companies without our permission and receiving any claim of request from the resale destination, please understand that customers will bear the burden.
- (8) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.

No.070920

单击下面可查看定价，库存，交付和生命周期等信息

[>>Panasonic\(松下\)](#)