32 Volt

SEM

ΡΛΝ

FEATURES


NPN GENERAL PURPOSE SWITCHING TRANSISTOR VOLTAGE POWER 225 mW


MECHANICAL DATA
Green molding compound as per IEC61249 Std (Halogen Free)
2015/865/EU directive)
 Lead free in compliance with EU RoHS2.0 (2011/65/EU &
•AEC-Q101 qualified
 Acquire quality system certificate : TS16949
Collector current IC=500mA
Collector-emitter voltage VcE=32V

MECHANICALDATA

• NPN epitaxial silicon, planar design

Case : SOT-23 plastic Terminals : Solderable per MIL-STD-750, Method 2026 Approx Weight : 0.0003 ounces, 0.0084 grams Marking : 241



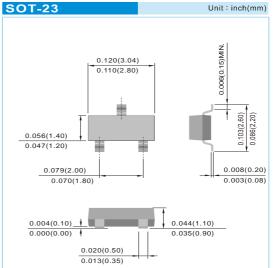

ABSOLUTE RATINGS (TA=25°C)

Parameter	Symbol	Value	Units
Collector-Emitter Voltage	Vceo	32	V
Collector-Base Voltage	Vсво	40	V
Emitter-Base Voltage	Vево	5	V
Collector Current Continuous	Ic	500	mA

THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Units
Max. Power Dissipation (Note 1)	Ртот	225	mW
Thermal Resistance, Junction to Ambient	Rθja	556	°C/W
Junction Temperation	TJ	-55 to +150	°C
Storage Temperation	Тѕтс	-55 to +150	°C

NOTE : 1.Transistor mounted on FR-4 board 70 x 60 x 1mm








ELECTRICAL CHARACTERISTICS(TA=25°C)

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Units
Collector-Base Breakdown Voltage	V(BR)CBO	I c=100 μA	40	-	-	V
Collector-Emitter Breakdown Voltage	V(BR)CEO	I c=1mA	32	-	-	V
Emitter-Base Breakdown Voltage	V(BR)EBO	Ι ε=100μA	5	-	-	V
Collector Cutoff Current	Ісво	Vcb=20V	-	-	1	μΑ
Emitter Cutoff Current	Іево	Veb=4V	-	-	1	μA
DC Current Gain (Note 2)	hfe	Vce=3V,Ic=100mA	120	-	390	-
Collector-Emitter Saturation Voltage	VCE(SAT)	I c=500mA,I в=50mA	-	-	0.6	V
Transition Frequency	fτ	Vce=5V,I e=-200mA, f=100MHz	-	250	-	MHz
Collector-Base Capacitance	Cob	Vcb=10V,I e=0A,f=1MHz	-	6.5	-	pF

NOTE : 2.Pulse Test : Pulse width < 300 μ s, duty cycle < 2.0%



ELECTRICAL CHARACTERISTICS CURVE

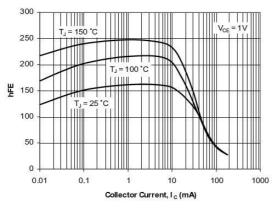



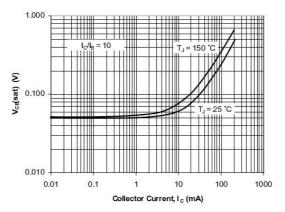
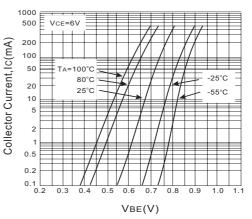



Fig. 3. Typical $V_{CE(SAT)}$ vs Collector Current





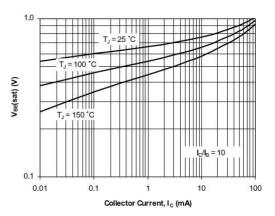


Fig. 4. Typical $V_{BE(SAT)}$ vs Collector Current


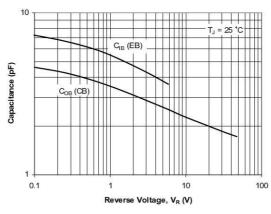


Fig. 5. Typical Capacitances vs Reverse Voltage



MOUNTING PAD LAYOUT

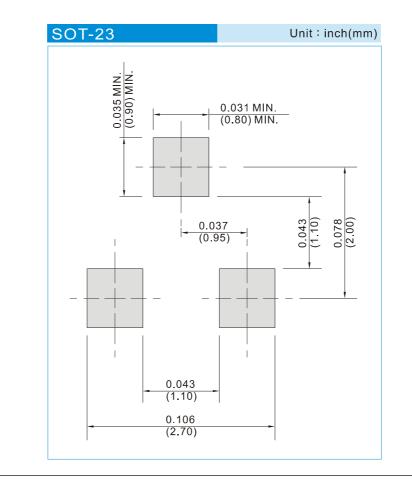


ORDER INFORMATION

• Packing information

T/R - 12K per 13" plastic Reel

T/R - 3K per 7" plastic Reel



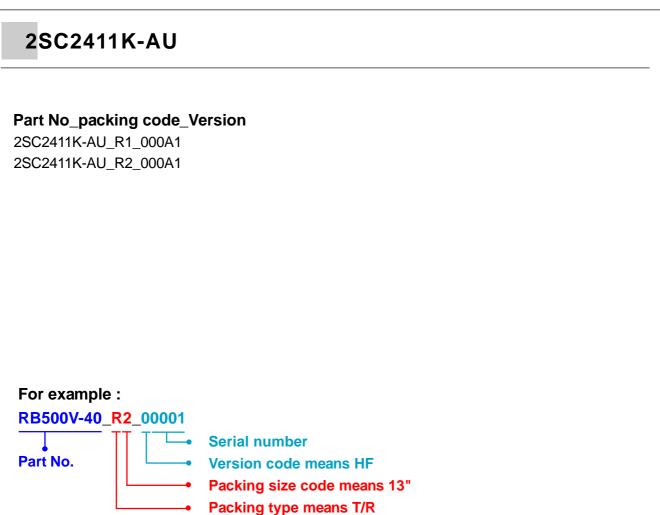

Packing Code XX			Version Code XXXXXX			
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	Α	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	В	13"	2			
Tube Packing (T/P)	т	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.



单击下面可查看定价,库存,交付和生命周期等信息

>>Panjit(强茂)