



## 50 Ohm SMA Amplifier Operating From 2 GHz to 4 GHz With 25 dB Gain And 15 dB P1db

### TECHNICAL DATA SHEET

PE1520

#### 50 Ohm SMA Amplifier Operating From 2 GHz to 4 GHz With 25 dB Gain And 15 dB P1db

##### Configuration

Design	LNA Amplifier
RF Input Connector	SMA Female
RF Input Connector Impedance	50 Ohms
RF Output Connector	SMA Female
RF Output Connector Impedance	50 Ohms
DC Bias Connector	Solder Pin

##### Electrical Specifications

Frequency Range, GHz	2 to 4
Typical Gain, dB	25
Output at 1 dB Compression Point, dBm	15
Maximum RF Input VSWR	2
Maximum RF Output VSWR	2
Operating DC Voltage, Volts	12
Maximum DC Current, mA	120

##### Mechanical Specifications

Temperature	
Operating Range, deg C	-30 to +70

##### Size

Length, in [mm]	2.36 [59.94]
Width/Dia., in [mm]	2.36 [59.94]
Height, in [mm]	0.75 [19.05]

##### RF Input Connector

Type	SMA Female
------	------------

##### RF Output Connector

Type	SMA Female
------	------------

##### DC Bias Connector

Type	Solder Pin
------	------------

##### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Amplifier Operating From 2 GHz to 4 GHz With 25 dB Gain And 15 dB P1db PE1520](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



## 50 Ohm SMA Amplifier Operating From 2 GHz to 4 GHz With 25 dB Gain And 15 dB P1db

### TECHNICAL DATA SHEET

PE1520

#### Plotted and Other Data

Notes:

Values at 25 °C, sea level

50 Ohm SMA Amplifier Operating From 2 GHz to 4 GHz With 25 dB Gain And 15 dB P1db from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Amplifier Operating From 2 GHz to 4 GHz With 25 dB Gain And 15 dB P1db PE1520](#)

URL: <http://www.pasternack.com/50-ohm-sma-amplifier-2000-mhz-4000-mhz-25-db-gain-pe1520-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE1520 CAD Drawing

50 Ohm SMA Amplifier Operating From 2 GHz to 4 GHz With 25 dB Gain And 15 dB P1db

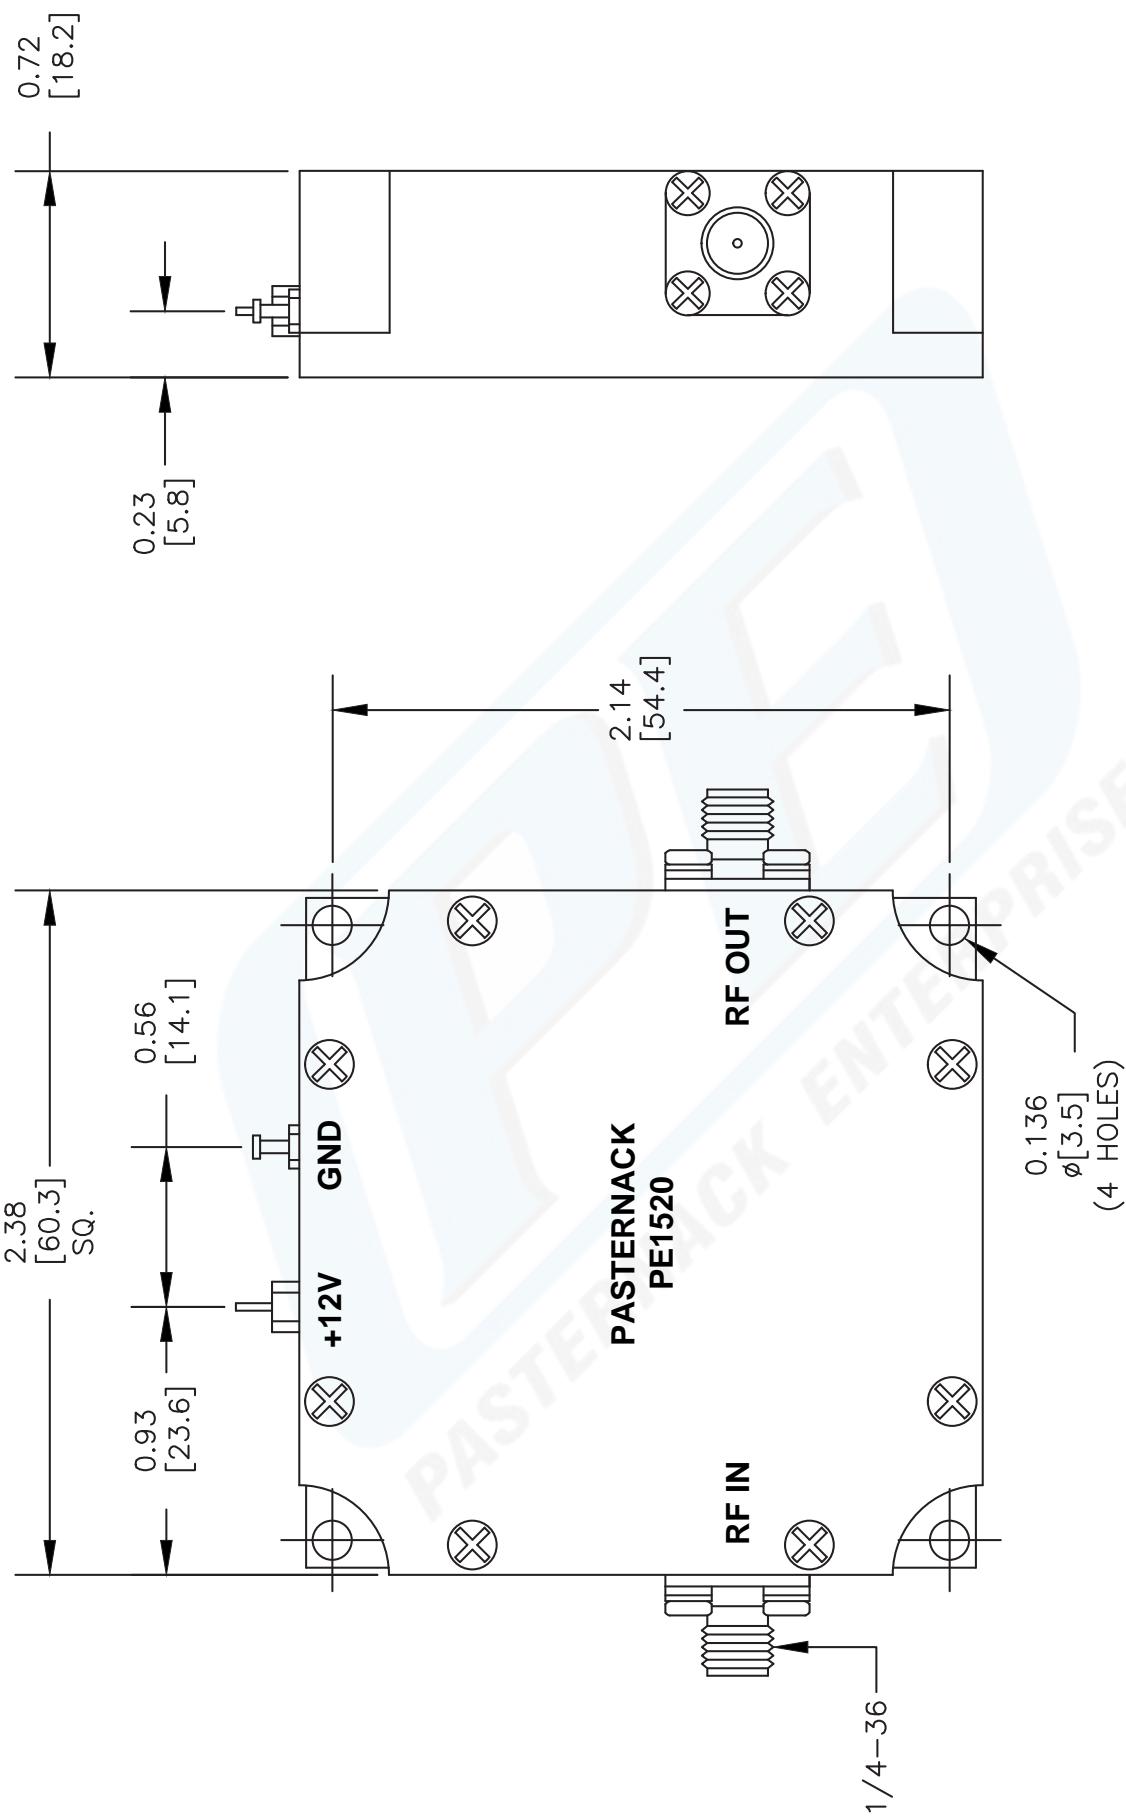

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	PE1520
REV. A	FSCM NO. 53919

SIZE	A	SCALE	N/A	SIZE	A
147					

<b>PE PASTERNACK®</b>	Pasterнак Enterprises, Inc. P.O. Box 16759   Irvine   CA   92623 Phone: (949) 261-1920   Fax: (949) 261-7451 Website: <a href="http://www.pasternack.com">www.pasternack.com</a>   E-Mail: <a href="mailto:sales@pasternack.com">sales@pasternack.com</a>
-----------------------	--

单击下面可查看定价, 库存, 交付和生命周期等信息

[\*\*>>PASTERNACK\*\*](#)