

HIGH FREQUENCY WIRE WOUND TRANSFORMERS

EE13 Platforms - THT TYPE



- AC/DC and DC/DC Switching Transformers
- Reinforced Insulation
- 3000Vrms Hi-Pot
- Topology: Flyback
- Custom Design Available

Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C¹

PA2718NL	Pri. Inductance	(5 - 1)	1.74 mH ± 10%	
	Lk. Inductance	(5 - 1)	98 µH MAX	
	w/	(7-8)	shorted	
	DCR	(5-1)	5200	m Ω Max
		(7-8)	24	
Hi-Pot	Pri-Sec	3000 Vrms		
K1 Factor		7505		

CM - FLYBACK TRANSFORMER

NOTES:


- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
- For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak flux density use the following formula:

$$B_{pk} \text{ (Gauss)} = K1_Factor * I_{pk}(A)$$
- In high volt-µsec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:

$$CoreLoss \text{ (W)} = 2.58E-13 X (Freq_kHz)^{1.35} X (DB_Gauss)^{2.80}$$
 where DB can be calculated as:
 For Flyback Topology: $DB = K1_Factor * D(A)$
 For Forward Topology: $DB = K1_Factor * Volt\text{-}\mu sec$
- The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.


HIGH FREQUENCY WIRE WOUND TRANSFORMERS

EE13 Platforms - THT Type

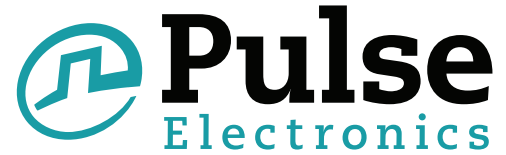

Mechanical

PA2718NL

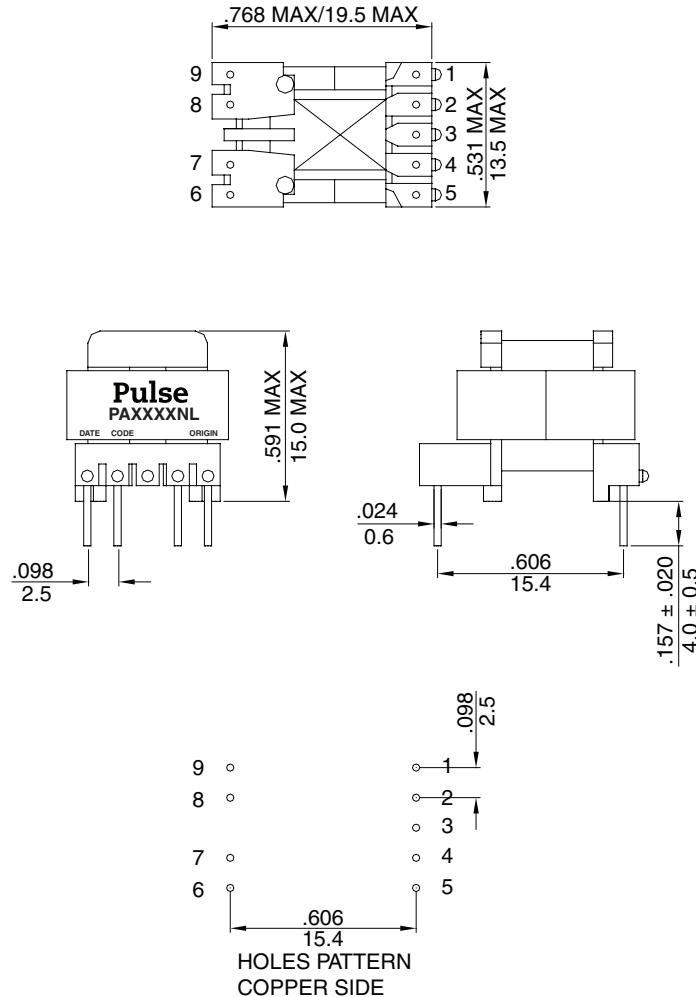

For More Information:

Pulse North America Headquarters

12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

Pulse European Headquarters

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Rd.
High-Tech Zone
Nanshan District
Shenzen, PR China 518057

Pulse North China

Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324

Pulse North Asia

No. 26
Kao Ching Rd.
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.
32667

TEL: 858 674 8100
FAX: 858 674 8262

TEL: 49 7032 7806 0
FAX: 49 7032 7806 12

TEL: 86 755 33966678
FAX: 86 755 33966700

TEL: 86 21 32181071
FAX: 86 21 32181396

TEL: 65 6287 8998
FAX: 65 6280 0080

TEL: 886 3 4643715
FAX: 886 3 4641911

This is a "Preliminary" product data sheet. Products mentioned on this data sheet are in development and in the process of being qualified. These products are not fully released nor are they in production. Features, specifications and performance of products offered are subject to change without notice. Other brand and product names mentioned herein may be products and/or registered trademarks of their respective owners. For current information on this product, please contact the Pulse office nearest you and ask for the "Power Applications Engineer." Pulse and the Squarewave logo are trademarks of Pulse Electronics, Inc., registered in the U.S. and other countries.

© Copyright, 2011. Pulse Electronics, Corporation. All rights reserved.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Pulse\(普思\)](#)