

RF360 Europe GmbH

A Qualcomm – TDK Joint Venture

SAW Components

SAW 2in1 filter

TD-SCDMA 1900/TD-SCDMA 2100

Series/type:	B9825
Ordering code:	B39202B9825P810
Date:	Oct 13, 2016
Version:	2.1

RF360 products mentioned within this document are offered by RF360 Europe GmbH and other subsidiaries of RF360 Holdings Singapore Pte. Ltd. (collectively, the “RF360 Subsidiaries”). RF360 Holdings Singapore Pte. Ltd. is a joint venture of Qualcomm Global Trading Pte. Ltd. and EPCOS AG. References in this documentation to EPCOS AG should properly reference, and shall be read to reference, the RF360 Subsidiaries.

RF360 Europe GmbH, Anzinger Str. 13, München, Germany

© 2016 RF360 Europe GmbH and/or its affiliated companies. All rights reserved.

These materials, including the information contained herein, may be used only for informational purposes by the customer. The RF360 Subsidiaries assume no responsibility for errors or omissions in these materials or the information contained herein. The RF360 Subsidiaries reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, and the RF360 Subsidiaries assume no liability and make no warranty or representation, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including, without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by QUALCOMM Incorporated or any of its subsidiaries.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of RF360 Europe GmbH.

Qualcomm and Qualcomm RF360 are trademarks of Qualcomm Incorporated, registered in the United States and other countries. RF360 is a trademark of Qualcomm Incorporated. Other product and brand names may be trademarks or registered trademarks of their respective owners.

This technical data may be subject to U.S. and international export, re-export, or transfer ("export") laws. Diversion contrary to U.S. and international law is strictly prohibited.



SAW Components

SAW 2in1 filter

TD-SCDMA 1900/TD-SCDMA 2100

Series/type:	B9825
Ordering code:	B39202B9825P810
Date:	Oct 13, 2016
Version:	2.1

© EPCOS AG 2016. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.




EPCOS AG is a TDK Group Company.


Application


- Low-loss 2in1 RF filter for mobile telephone
- TD-SCDMA 1900 and TD-SCDMA 2100 systems
- Usable passband:
 - Filter 1 (TD-SCDMA 1900): 40MHz
 - Filter 2 (TD-SCDMA 2100): 15MHz
- Unbalanced to balanced operation for both filters
- Impedance transformation from 50 Ω to 100 Ω for both filters
- Low amplitude ripple
- Suitable for GPRS class 1 to 12


Features

- Package size 1.5 x 1.1 x 0.4 mm³
- Moisture Sensitive Level 3
- RoHS compatible
- Approx. weight 0.003g
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**

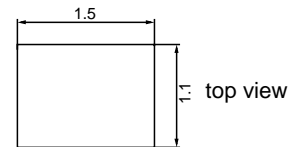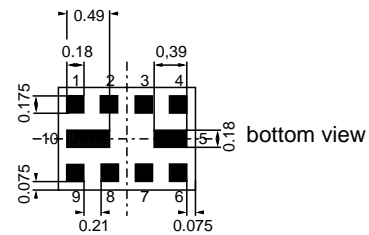
Pin configuration

- 1 Input [Filter 1]
- 4 Input [Filter 2]
- 6,7 Output balanced [Filter 2]
- 8,9 Output balanced [Filter 1]
- 2,3,5,10 Case ground



Data sheet


Characteristics of Filter 1 (TD-SCDMA 1900)

Temperature range for specification: $T = -30\text{ }^{\circ}\text{C to }+85\text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 100\ \Omega$

		min.	typ. @ 25 °C	max.	
Center frequency	f_C	—	1900.0	—	MHz
Maximum insertion attenuation	α_{\max}	—	1.6	2.2	dB
1880.0 ... 1920.0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0.5	1.1	dB
1880.0 ... 1920.0 MHz					
Input VSWR		—	1.7	2.1	
1880.0 ... 1920.0 MHz					
Output VSWR		—	1.7	2.1	
1880.0 ... 1920.0 MHz					
Common mode rejection ratio		20	25	—	dB
1880.0 ... 1920.0 MHz					
Attenuation	α				
10.0 ... 1795.0 MHz		30	38	—	dB
1795.0 ... 1820.0 MHz		25	31	—	dB
1820.0 ... 1850.0 MHz		20	31	—	dB
1950.0 ... 1980.0 MHz		16	21	—	dB
1980.0 ... 2025.0 MHz		16	26	—	dB
2025.0 ... 6000.0 MHz		16	22	—	dB



Maximum ratings of Filter 1 (TD-SCDMA 1900)

Operable temperature range	T	-40/+85	°C	
Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	3	V	
ESD voltage	V _{ESD}	50 ¹⁾	V	machine model, 1 pulse
Input power at 1880.0 ... 1920.0MHz	P _{IN}	10	dBm	continuous wave


¹⁾ acc. to JESD22-A115A (machine model), 1 negative & 1 positive pulse.



Transfer function of filter 1

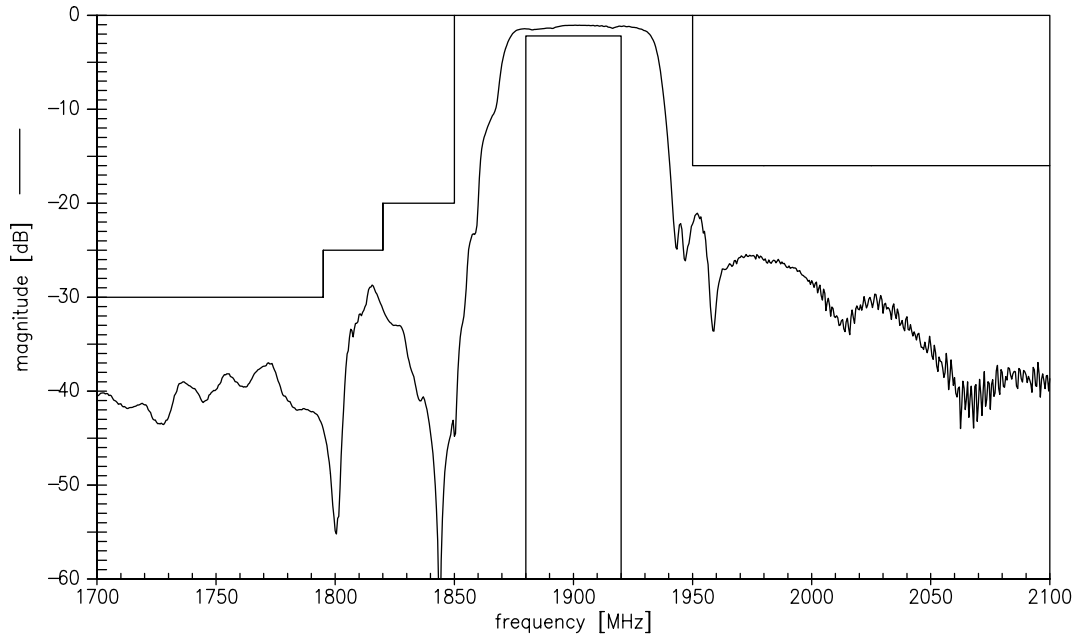

Transfer function of filter 1 - wideband

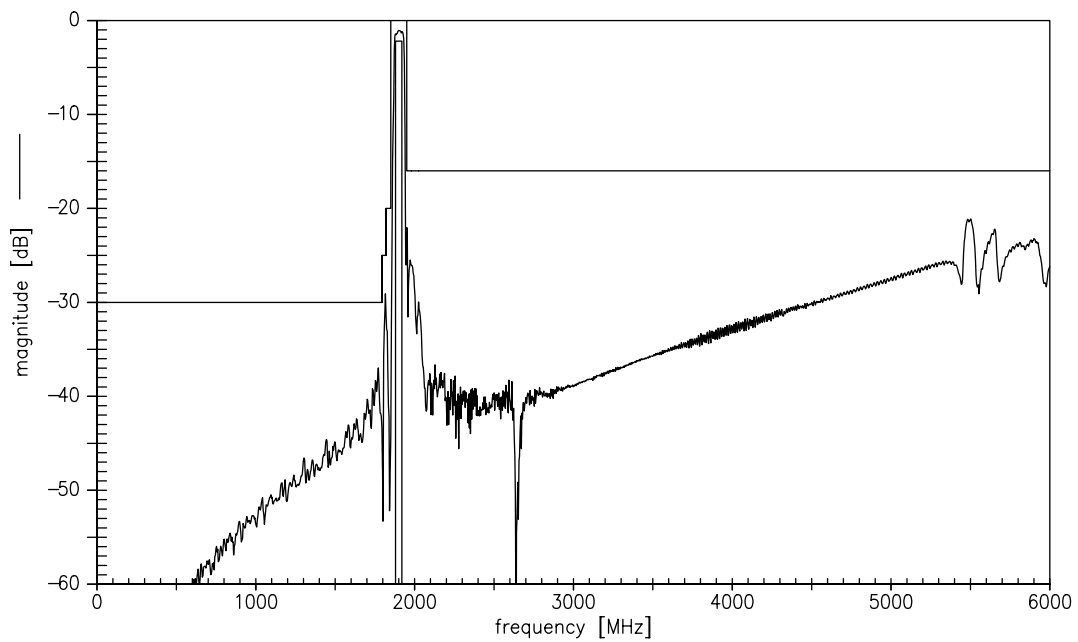


Please read *cautions and warnings* and *important notes* at the end of this document.

Data sheet




Smith Charts filter 1


S_{11} function

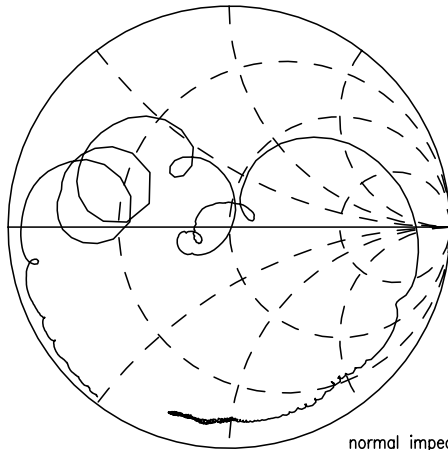


normal impedance: 50.00 Ω

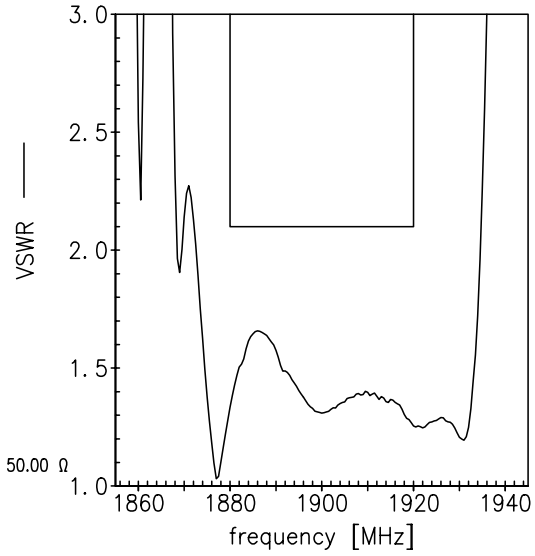

S_{22} function

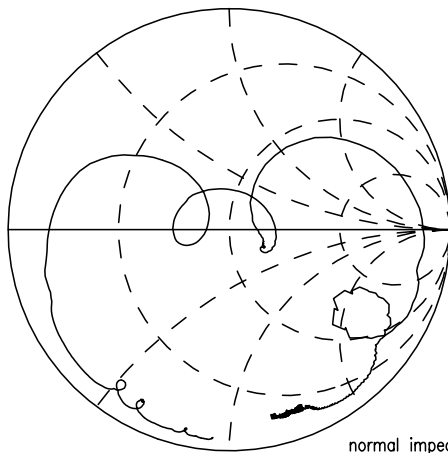

normal impedance: 100.00 Ω

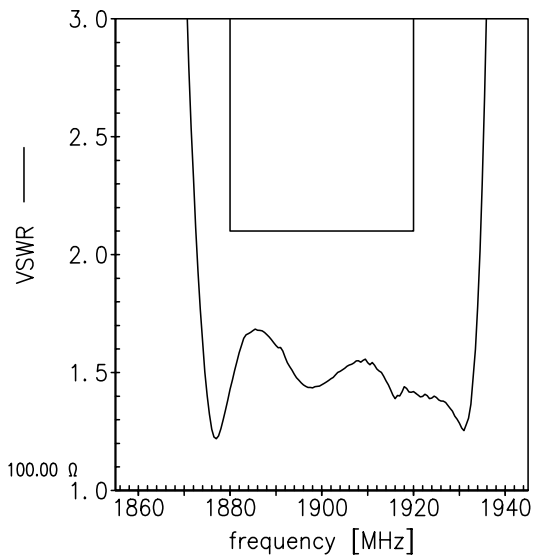

Data sheet


Characteristics of Filter 2 (TD-SCDMA 2100)

Temperature range for specification: $T = -30\text{ °C to }+85\text{ °C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 100\ \Omega$

		min.	typ. @ 25 °C	max.	
Center frequency	f_C	—	2017.5	—	MHz
Maximum insertion attenuation 2010.0 ... 2025.0 MHz	α_{\max}	—	1.6	2.1	dB
Amplitude ripple (p-p) 2010.0 ... 2025.0 MHz	$\Delta\alpha$	—	0.5	1.0	dB
Input VSWR 2010.0 ... 2025.0 MHz		—	1.3	2.0	
Output VSWR 2010.0 ... 2025.0 MHz		—	1.3	2.0	
Common mode rejection ratio 2010.0 ... 2025.0 MHz		20	28	—	dB
Attenuation	α				
10.0 ... 1815.0 MHz		35	47	—	dB
1815.0 ... 1840.0 MHz		35	45	—	dB
1840.0 ... 1895.0 MHz		30	40	—	dB
1925.0 ... 1980.0 MHz		17	26	—	dB
2050.0 ... 2085.0 MHz		10	17	—	dB
2085.0 ... 2110.0 MHz		20	25	—	dB
2110.0 ... 6000.0 MHz		25	29	—	dB


Maximum ratings of Filter 2 (TD-SCDMA 2100)


Operable temperature range	T	-40/+85	°C	
Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	3	V	
ESD voltage	V _{ESD}	50 ¹⁾	V	machine model, 1 pulse
Input power at 2010.0 ... 2025.0MHz	P _{IN}	10	dBm	continuous wave

¹⁾ acc. to JESD22-A115A (machine model), 1 negative & 1 positive pulse.


Data sheet



Transfer function of filter 2

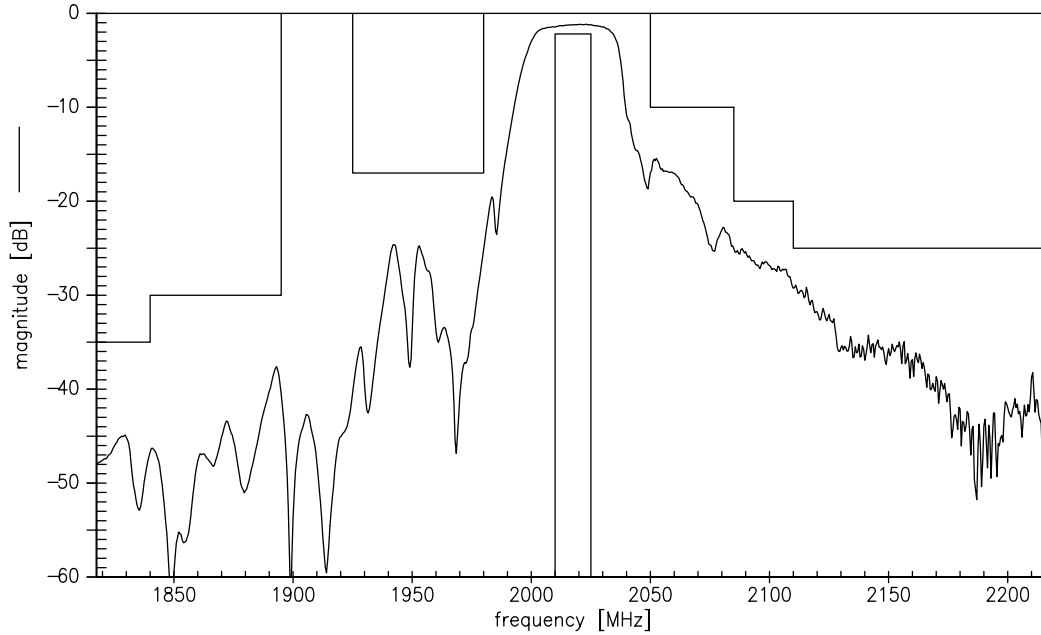

Transfer function of filter 2 - wideband

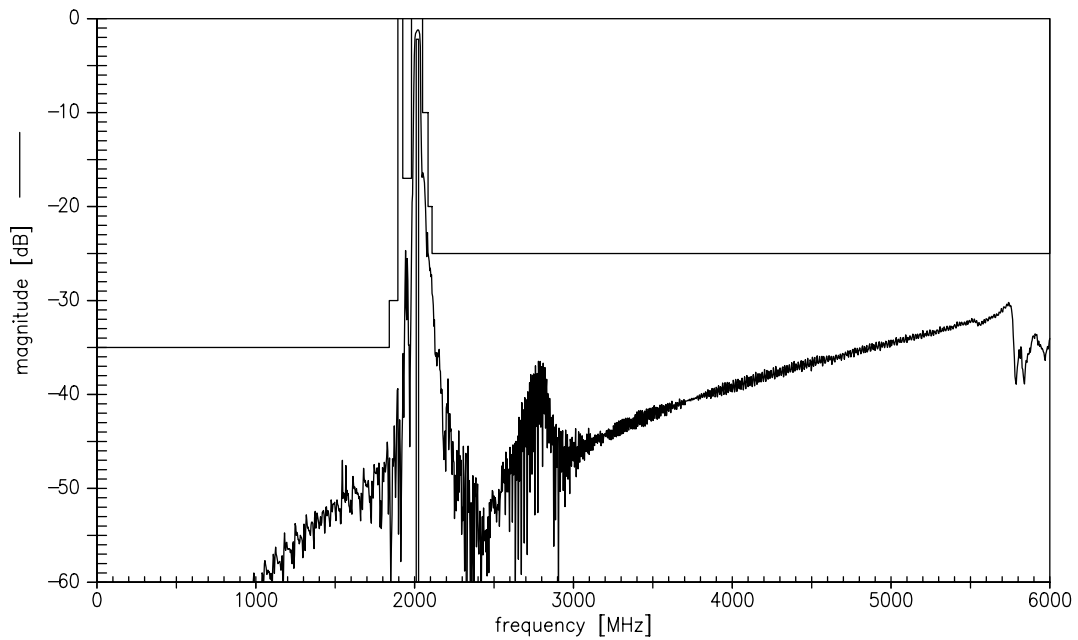


Please read *cautions and warnings* and *important notes* at the end of this document.

Data sheet




Smith Charts filter 2


S_{11} function

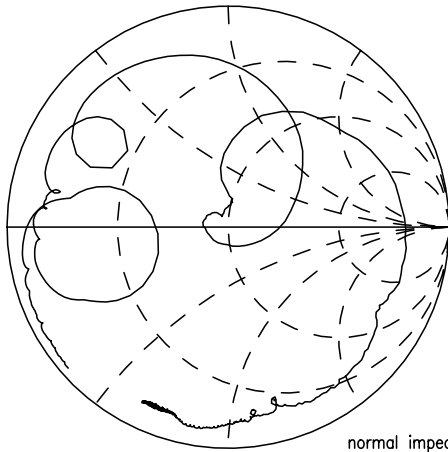


normal impedance: 50.00 Ω

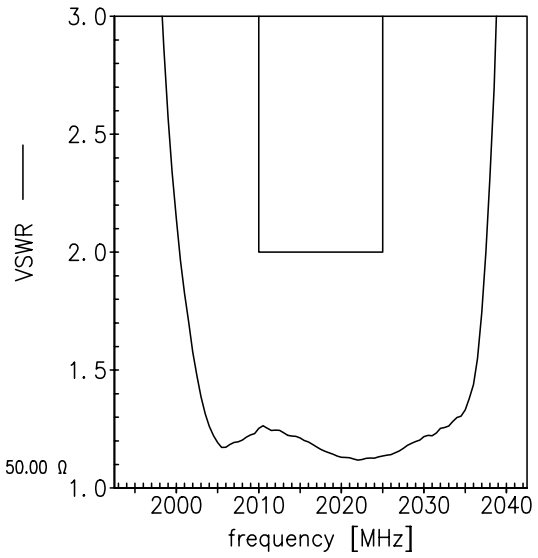

S_{22} function

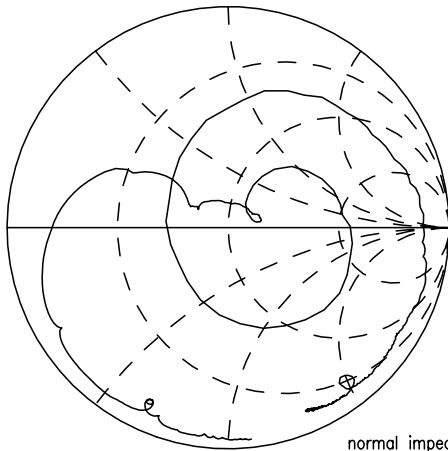

normal impedance: 100.00 Ω

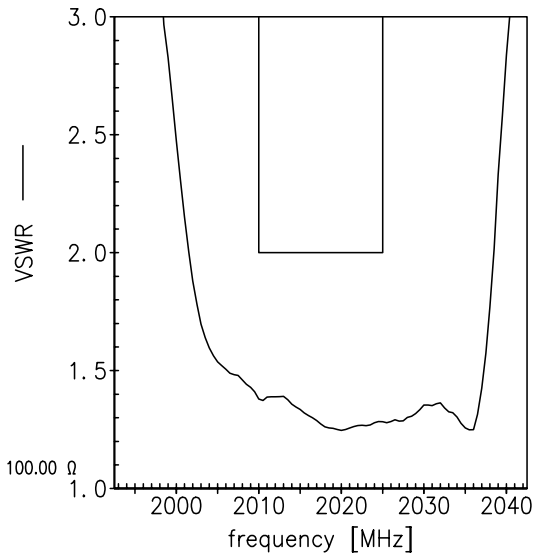

SAW Components **B9825**

SAW 2in1 filter **1900.0 / 2017.5 MHz**

Data sheet



References

Type	B9825
Ordering code	B39202B9825P810
Marking and package	C61157-A8-A19-3-27
Packaging	F61074-V8227-Z000
Date codes	L_1126
S-parameters	B9825_LB_NB.s3p, B9825_LB_WB.s3p, B9825_UB_NB.s3p, B9825_UB_WB.s3p see file header for port/pin assignment table
Soldering profile	S_6001
RoHS compatible	RoHS-compatible means that products are compatible with the "requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8th, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.
Matching coilss	See Inductor pdf-catalog http://www.tdk.co.jp/tefe02/coil.htm#aname1 and Data Library for circuit simulation http://www.tdk.co.jp/etvcl/index.htm

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com .

**Published by EPCOS AG
Systems, Acoustics, Waves Business Group
P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2016. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, Alu-X, CeraDiode, CeraLink, CeraPlus, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, ExoCore, FilterCap, FormFit, LeaXield, MinBlue, MinCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PQSine, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, TFAP, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Qualcomm-RF360](#)