



# SGM5347-10

## 8 Channels, 10-Bit Digital-to-Analog Converter with Output Operational Amplifier

---

### GENERAL DESCRIPTION

The SGM5347-10 features 8 channels of 10-bit digital-to-analog converter (DAC) with output amplifiers. The output amplifier provides high current drive capability. The digital data is input via a serial link bus. Only three control lines are required, and cascaded connections can be used. The SGM5347-10 provides daisy-chain capability, which can update multiple SGM5347-10s simultaneously by using a single serial interface.

The SGM5347-10 is available in Green SOIC-16 and TSSOP-16 packages. It operates over an ambient temperature range of -40°C to +125°C.

### FEATURES

- **Low Power Consumption (0.5mW/CH)**
- **Integrating 8 Channels of 10-Bit DAC**
- **Build-In Analog Output Amplifier:  
Sink/Source Current with Short Current Control**
- **Daisy-Chain Operation**
- **8 Channels Outputs Update Simultaneously**
- **Independent Channel Power-Down Function**
  - ♦ **0.6μA (TYP) I<sub>CC</sub> for Power-Down Mode**
- **The Range of D/A Conversion can be Independently Set by Separating the Power Supply for MCU Interface and Operational Amplifier and the Power Supply for DAC**
- **Capable of Being Controlled Directly by a 3V MCU**
- **Power-On Reset: Output Reset to GND**
- **Serial Data Input: Up to 2.5MHz Operation**
- **Power Supply Voltage Range: 2.8V to 5.5V**
- **Available in Green SOIC-16 and TSSOP-16 Packages**

# 8 Channels, 10-Bit Digital-to-Analog Converter with Output Operational Amplifier

## SGM5347-10


### PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM5347-10	SOIC-16	-40°C to +125°C	SGM5347-10XS16G/TR	SGMMOEXS16 XXXXX	Tape and Reel, 2500
	TSSOP-16	-40°C to +125°C	SGM5347-10XTS16G/TR	SGMMOF XTS16 XXXXX	Tape and Reel, 4000

### MARKING INFORMATION

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

**XXXXX**



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

### ABSOLUTE MAXIMUM RATINGS

Power Supply Voltage Range <sup>(1)</sup>

$V_{CC}$ .....	-0.3V to 6.5V
$V_{REF+}$ .....	-0.3V to 6.5V
$V_{REF-}$ .....	GND $\pm$ 0.3V
Input Voltage Range, $V_{IN}$ .....	-0.3V to $V_{CC} + 0.3V$
Output Voltage Range, $V_{OUT}$ .....	-0.3V to $V_{CC} + 0.3V$
Package Thermal Resistance	
SOIC-16.....	90°C/W
TSSOP-16.....	120°C/W
Junction Temperature.....	+150°C
Storage Temperature Range.....	-65°C to +150°C
Lead Temperature (Soldering, 10s).....	+260°C
ESD Susceptibility	
HBM.....	4000V
CDM.....	1000V

NOTE: 1.  $V_{CC} \geq V_{REF+}$ .

### RECOMMENDED OPERATING CONDITIONS

Power Supply Voltage 1

$V_{CC}$ .....	2.8V to 5.5V
GND.....	0V
Power Supply Voltage 2 ( $V_{REF+} - V_{REF-} \geq 0.5V$ )	
$V_{REF+}$ .....	0.5V to $V_{CC}$
$V_{REF-}$ .....	GND
Oscillation Limited Output Capacitance, $C_{OL}$ .....	2nF (TYP)
Digital Data Setting Range.....	#000 to #3FF
Operating Temperature Range.....	-40°C to +125°C

### OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


### ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

### DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATIONS

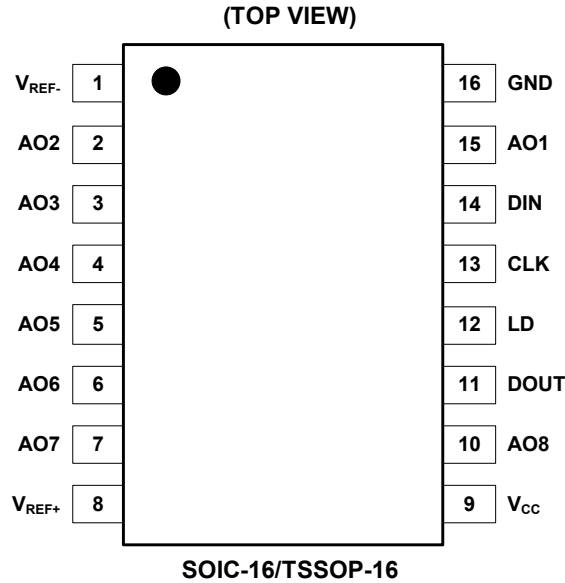

PIN DESCRIPTION

PIN	NAME	TYPE	FUNCTION
1	V <sub>REF-</sub>	-	Negative Reference Voltage Input Pin. Always connect this pin to ground in application.
8	V <sub>REF+</sub>	-	Positive Reference Voltage Input Pin.
9	V <sub>CC</sub>	-	Power Supply Pin. Power supply pin of MCU interface and operational amplifier.
16	GND	-	Ground Pin. Ground pin of MCU interface and operational amplifier.
15, 2, 3, 4, 5, 6, 7, 10	AO1-AO8	O	DAC Output Pins. These pins are 10-bit DAC outputs with operational amplifiers.
11	DOUT	O	Data Output Pin. This pin outputs MSB of the 14-bit shift register.
12	LD	I	Load Signal Input Pin. If LD pin is brought from low to high, the data of shift register is loaded to the decoder and the register for DAC output.
13	CLK	I	Shift Clock Input Pin. The input signal from the DIN pin is input to a 14-bit shift register on the rising edge of the shift clock.
14	DIN	I	Serial Data Input Pin. This pin inputs 14-bit length serial data.

NOTE: DIN, CLK, and LD pins should remain "L" level at non-data transfer.

# 8 Channels, 10-Bit Digital-to-Analog Converter with Output Operational Amplifier

## SGM5347-10

### ELECTRICAL CHARACTERISTICS

( $V_{CC} = 2.8V$  to  $5.5V$ ,  $T_A = -40^{\circ}C$  to  $+125^{\circ}C$ ,  $V_{REF+} = V_{CC}$ ,  $V_{REF-} = GND$ ,  $C_L = 200pF$  to  $GND$ , input code range from 12 to 1011. Typical values are at  $T_A = +25^{\circ}C$ , unless otherwise noted.)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>Analog DC Performance</b>					
Resolution		10			Bit
INL <sup>(1)</sup>			0.8	2.8	LSB
DNL <sup>(2)</sup>	Monotonicity guaranteed by design	-0.25		0.3	LSB
Offset			3	15	mV
Gain Error			0.1	0.45	%FSR
Offset Drift			10	60	$\mu V/^{\circ}C$
Gain Drift			2	15	ppmFS/ $^{\circ}C$
Zero Code Error	0 $\mu A$ current load		3	15	mV
	200 $\mu A$ current load		5		
	1mA current load		8		
Full Scale Error	0 $\mu A$ current load		3	25	mV
	200 $\mu A$ current load		6		
	1mA current load		20		
Zero Code Drift			5		$\mu V/^{\circ}C$
Full Scale Error Drift			5		$\mu V/^{\circ}C$
<b>Analog AC Performance</b>					
Output Settling Time	To 1LSB		7		$\mu s$
Slew Rate	$C_{LOAD} = 200pF$		0.9		V/ $\mu s$
Noise Density	Code = 0x200, f = 1kHz		30		nV/ $\sqrt{Hz}$
Noise	30kHz LPF		17		$\mu V_{RMS}$
Multiplying Bandwidth			300		kHz
Wake-Up Time	$C_{LOAD} = 200pF$		8		$\mu s$
<b>Output Characteristics</b>					
Output Resistance			0.3		$\Omega$
Short Current	Sink		37		mA
	Source		37		
Continuous Current <sup>(3)</sup>	$V_{CC} = 2.8V$		5		mA
	$V_{CC} = 5.5V$		10		
Maximum Capacitance Load			2		nF
<b>Reference Characteristics</b>					
$V_{REF+}$		0.5		$V_{CC}$	V
Input Impedance			25		k $\Omega$
<b>Digital Input Characteristics</b>					
Input Current			0.1	1	$\mu A$
Input Low Voltage	$V_{CC} = 2.8V$ to $3.6V$			0.6	V
	$V_{CC} = 4.5V$ to $5.5V$			0.8	
Input High Voltage	$V_{CC} = 2.8V$ to $3.6V$	2.3			V
	$V_{CC} = 4.5V$ to $5.5V$	3.5			
Input Hysteresis			0.2		V

# 8 Channels, 10-Bit Digital-to-Analog Converter with Output Operational Amplifier

## SGM5347-10


### ELECTRICAL CHARACTERISTICS (continued)

( $V_{CC} = 2.8V$  to  $5.5V$ ,  $T_A = -40^{\circ}C$  to  $+125^{\circ}C$ ,  $V_{REF+} = V_{CC}$ ,  $V_{REF-} = GND$ ,  $C_L = 200pF$  to  $GND$ , input code range from 12 to 1011. Typical values are at  $T_A = +25^{\circ}C$ , unless otherwise noted.)

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
<b>Power-On Reset</b>						
Reset Level	MIN for minimum entry level, MAX for maximum release level		2.45	2.6	2.78	V
Hysteresis	Difference between reset release level and entry level			40		mV
<b>Power Consumption</b>						
Normal Operation Mode	$I_{CC}$	$V_{CC} = 5V$		0.5	0.8	mA
	$I_{REF+}$	$V_{REF+} = 5V$		0.2	0.4	
Power-Down Mode		$V_{CC} = 5V$		0.6	3	$\mu A$
		$V_{REF+} = 5V$		0.01	1	

**NOTES:**

1. Nonlinearity error: The error of the I/O curve deviated from the ideal straight line between output voltages at "#00C" and "#3F3".
2. Differential nonlinearity error: The error deviated from the ideal increment given when the digital value is incremented by one bit.
3. At  $+125^{\circ}C$ , please limit the output current of each channel to 5mA for maximum operating life time.

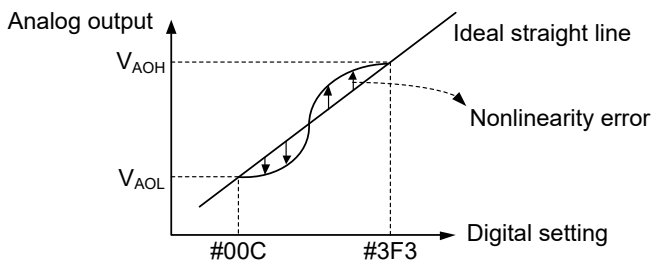


# 8 Channels, 10-Bit Digital-to-Analog Converter with Output Operational Amplifier

## SGM5347-10

### TIMING CHARACTERISTICS

( $V_{CC} = 2.8V$  to  $5.5V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
"L" Level Clock Pulse Width	$t_{CKL}$		200			ns
"H" Level Clock Pulse Width	$t_{CKH}$		200			ns
Clock Rising Time	$t_{Cr}$				200	ns
Clock Falling Time	$t_{Cf}$					
Data Setup Time	$t_{DCH}$		30			ns
Data Hold Time	$t_{CHD}$		60			ns
Load Setup Time	$t_{CHL}$		200			ns
Load Hold Time	$t_{LDC}$		100			ns
"H" Level Load Pulse Width	$t_{LDH}$		100			ns
Data Output Delay Time	$t_{DO}$		70		350	ns
D/A Output Settling Time	$t_{LDD}$				100	$\mu s$
LD Hold Time after the 14th Rising Edge of CLK	$t_{SH}$		60			ns

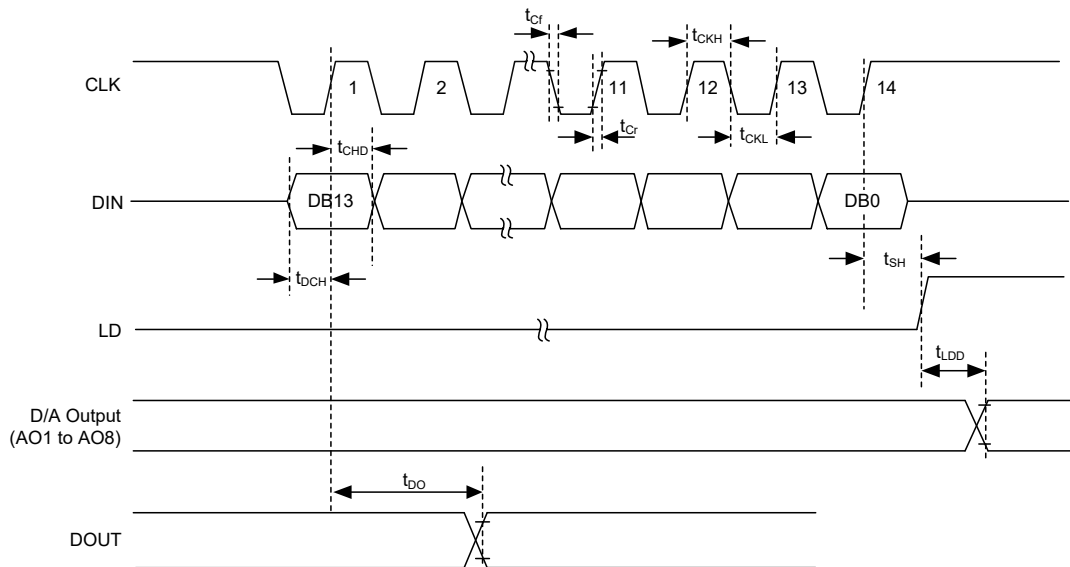

**NOTES:**







1. The D/A output evaluation levels are 90% and 10% of  $V_{CC}$ . The other evaluation levels are 80% and 20% of  $V_{CC}$ .
2. Please ensure of the 14 bits of data are sent before the rising edge of LD.

**Figure 1. Input/Output Timing Diagram**

# SGM5347-10 8 Channels, 10-Bit Digital-to-Analog Converter with Output Operational Amplifier

## TYPICAL PERFORMANCE CHARACTERISTICS







T<sub>A</sub> = +25°C, unless otherwise noted.

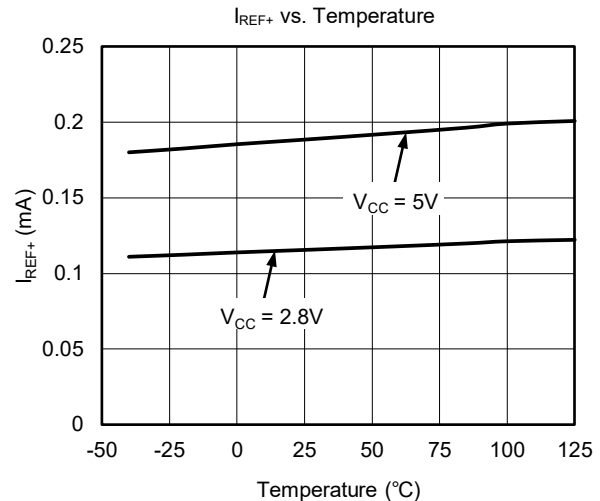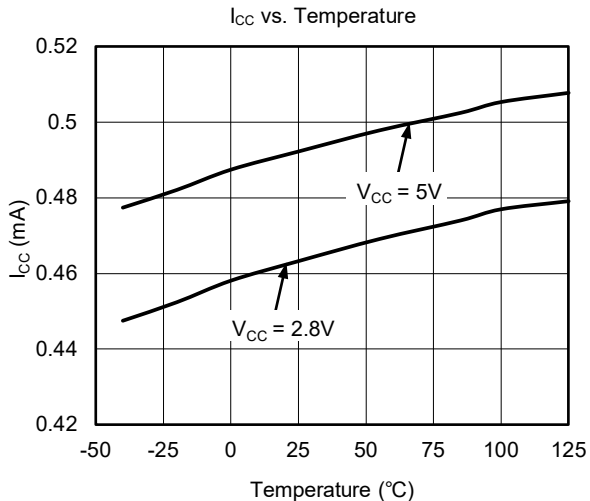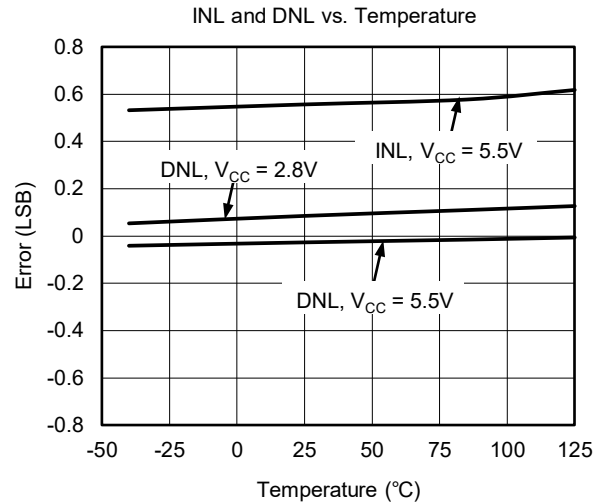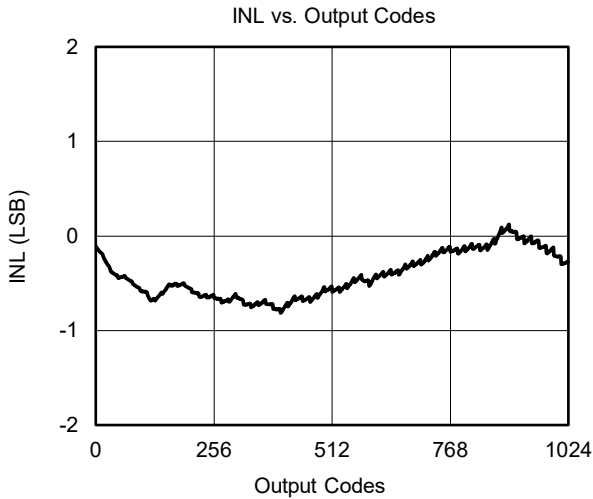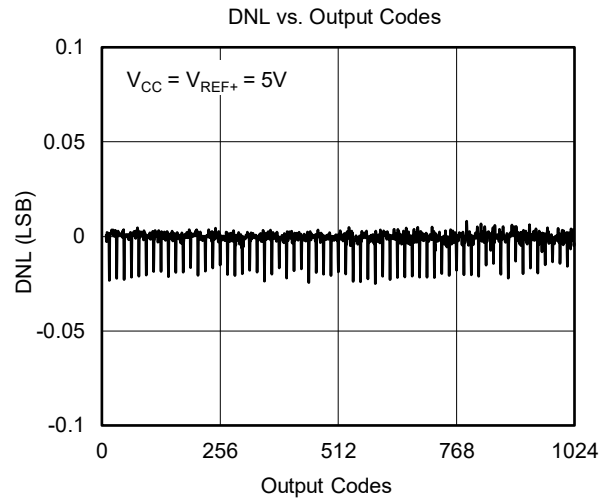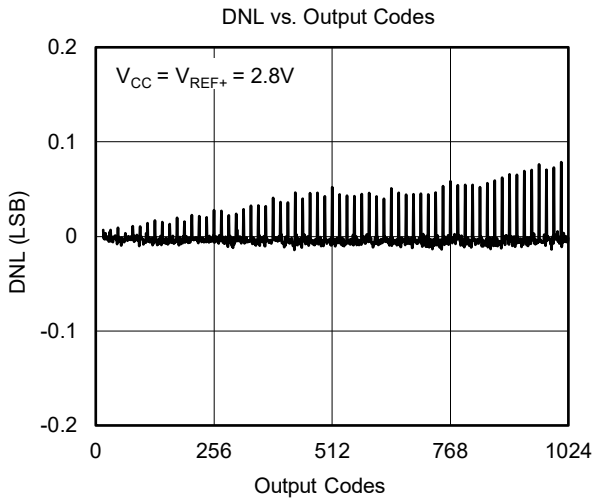

# SGM5347-10 8 Channels, 10-Bit Digital-to-Analog Converter with Output Operational Amplifier

## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

T<sub>A</sub> = +25°C, unless otherwise noted.

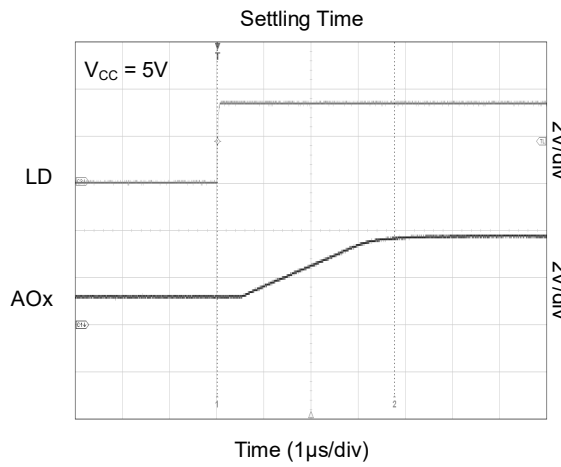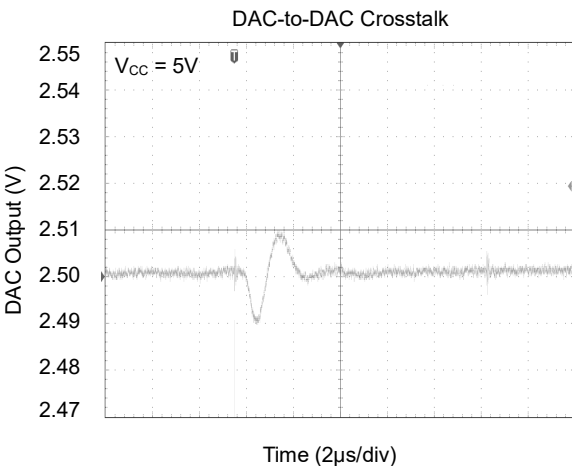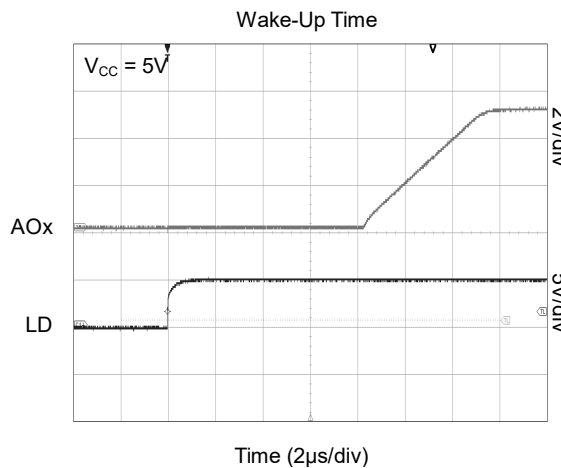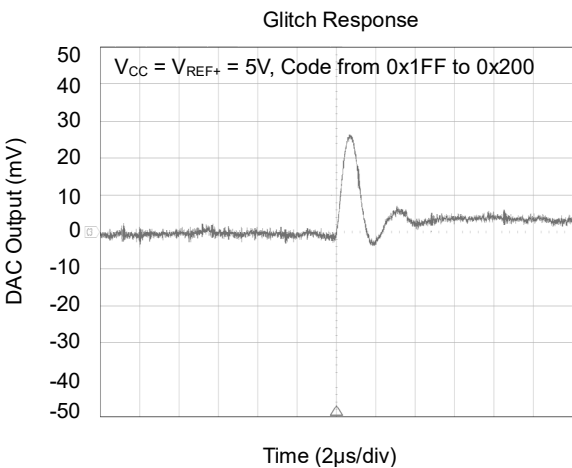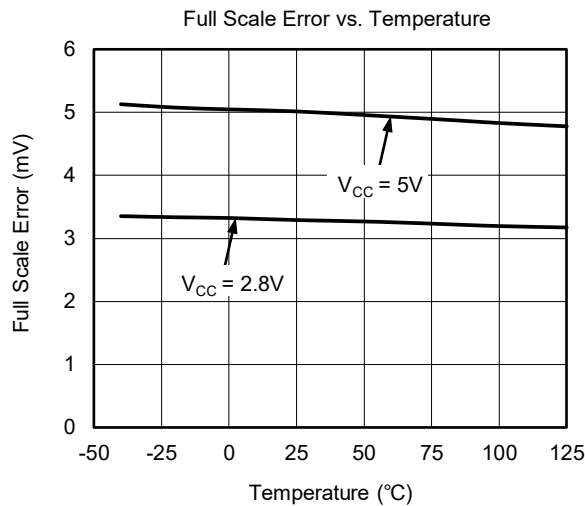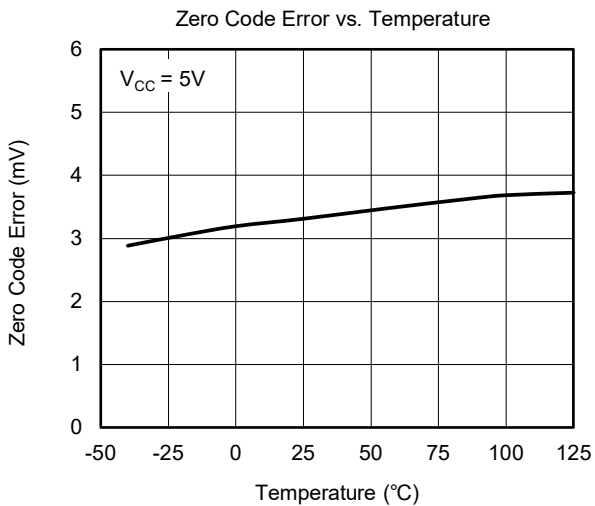



REGISTER MAPS

Data for Shift Register

- SGM5347-10 has a 14-bit shift register for chip control.
- It is necessary to set the data as following configuration to a 14-bit shift register.
- The data consists of 14 bits: a 4-bit address selection and a 10-bit DAC control signal.

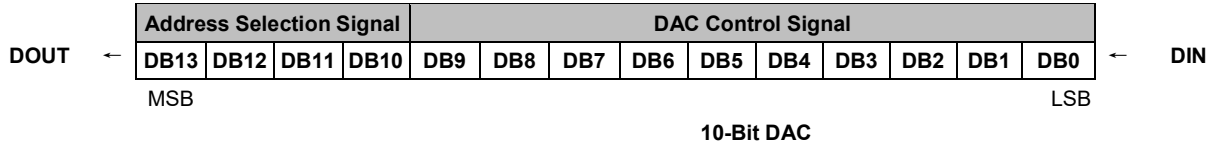


Figure 2. Serial Data

Address Selection Signal

Input Data Signal				Address Selected
DB13	DB12	DB11	DB10	
0	0	0	0	Don't care.
1	0	0	0	AO1 selected.
0	1	0	0	AO2 selected.
1	1	0	0	AO3 selected.
0	0	1	0	AO4 selected.
1	0	1	0	AO5 selected.
0	1	1	0	AO6 selected.
1	1	1	0	AO7 selected.
0	0	0	1	AO8 selected.
1	0	0	1	PWR_DWN.
0	1	0	1	CONTROL.
1	1	0	1	Don't care.
0	0	1	1	Don't care.
1	0	1	1	Don't care.
0	1	1	1	Don't care.
1	1	1	1	Don't care.

DAC Control Signal

Input Data Signal										DAC Output Voltage
DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	
0	0	0	0	0	0	0	0	0	0	= V <sub>REF-</sub>
0	0	0	0	0	0	0	0	0	1	= V <sub>LB</sub> + V <sub>REF-</sub>
0	0	0	0	0	0	0	0	1	0	= 2 × V <sub>LB</sub> + V <sub>REF-</sub>
~	~	~	~	~	~	~	~	~	~	~
1	1	1	1	1	1	1	1	1	0	= 1022 × V <sub>LB</sub> + V <sub>REF-</sub>
1	1	1	1	1	1	1	1	1	1	= 1023 × V <sub>LB</sub> + V <sub>REF-</sub>

NOTE: V<sub>LB</sub> = (V<sub>REF+</sub> - V<sub>REF-</sub>)/1024.

# 8 Channels, 10-Bit Digital-to-Analog Converter with Output Operational Amplifier

## SGM5347-10

### REGISTER MAPS (continued)

#### PWR\_DWN Register

DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
PD_AO8	PD_AO7	PD_AO6	PD_AO5	PD_AO4	PD_AO3	PD_AO2	PD_AO1	N/A	N/A
0	0	0	0	0	0	0	0	Don't care	

PWR\_DWN register is not readable. Setting the bit to 1 powers down the corresponding DAC channel. Clearing the bit brings it up. If all the channels are powered down then the bias circuit will be powered down as well.

#### CONTROL Register

DB9	DB8	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
N/A	N/A	N/A	N/A	RST	UPDATE	SYNC	3K_PULL	N/A	N/A
X	X	X	X	X	0	0	0	Don't care	

**Table 1. CONTROL Register Details**

BITS	BIT NAME	DESCRIPTION
DB[9:6]	N/A	
DB[5]	RST	1 = Reset internal circuit other than the shift register. Will be automatically cleared to 0 after writing a 1. Since the reset doesn't hold, the next frame can be used for command. For example, at the first frame, the RST bit is written so that all DAC outputs reset to 0 at rising edge of the LD signal. The second frame can be a data writing command, but the DAC outputs won't be changed from 0 until writing of the data takes effect by the LD signal of the second frame.
DB[4]	UPDATE	1 = The rising edge of LD signal updates data in DIN register of all 8 channels to the corresponding data registers. The bit is then automatically cleared to 0
DB[3]	SYNC	0 = The rising edge of LD signal loads the data in shift register to DIN and DATA 1 = The rising edge of LD signal only loads the data in shift register to DIN register indicated by ADDR but does not update the data register. LD will update all 8 channels when writing to channel 8.
DB[2]	3K_PULL	0 = The pull-down resistance is around 300kΩ 1 = Enable the 3kΩ pull-down resistors for all the 8 channels. The pull-down resistors are only enabled in power-down mode
DB[1:0]	N/A	Don't care

Example one of a simultaneous update:

1. Write 0x008 to CONTROL register.
2. Write data to channel 1, to channel 2 ... to channel 7.
3. Writing data to channel 8 causes all the 8 channels to update at the same time. Then the following writings are still simultaneously updated.
4. Write 0x000 to CONTROL register to exit simultaneous update mode.

Example two of a simultaneous update:

1. Write 0x008 to CONTROL register.
2. Write data to channel 1, to channel 2 ... to channel 7.
3. Write 0x018 to CONTROL register to update all the 8 channels. Then the following writings are still simultaneously updated.
4. Write 0x000 to CONTROL register to exit simultaneous update mode.

**REVISION HISTORY**


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

<b>Changes from Original (DECEMBER 2019) to REV.A</b>	<b>Page</b>
Changed from product preview to production data .....	All

---

PACKAGE OUTLINE DIMENSIONS



TSSOP-16

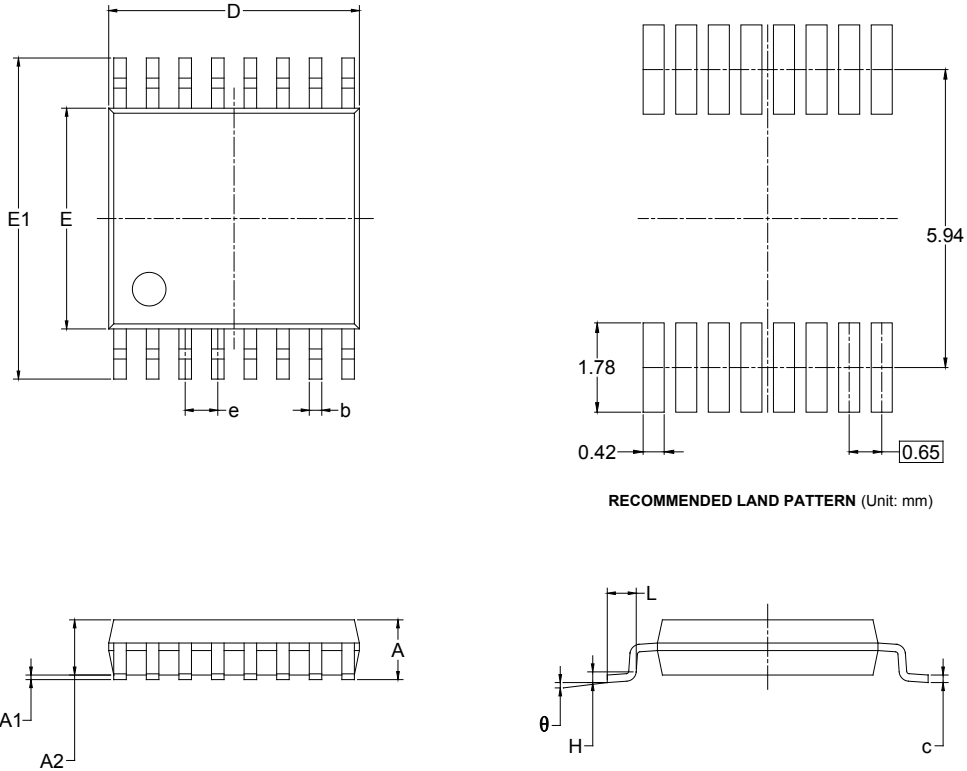



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A		1.200		0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
D	4.860	5.100	0.191	0.201
E	4.300	4.500	0.169	0.177
E1	6.200	6.600	0.244	0.260
e	0.650 BSC		0.026 BSC	
L	0.500	0.700	0.02	0.028
H	0.25 TYP		0.01 TYP	
$\theta$	1°	7°	1°	7°

PACKAGE OUTLINE DIMENSIONS

SOIC-16

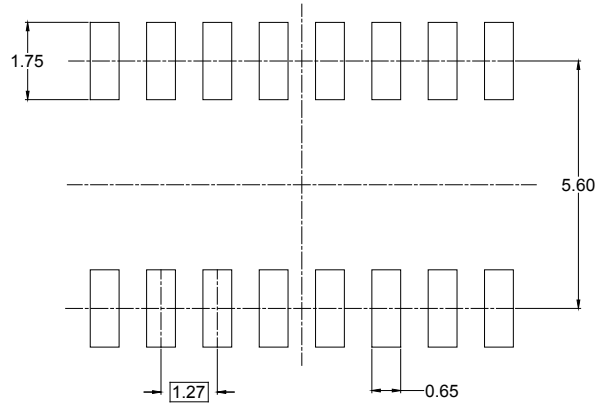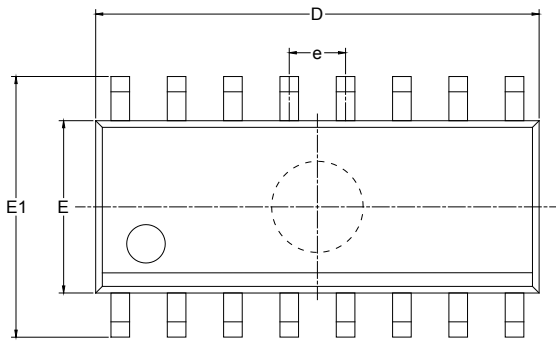


RECOMMENDED LAND PATTERN (Unit: mm)

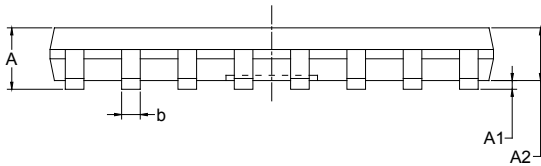


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	9.800	10.200	0.386	0.402
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.27 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

TAPE AND REEL INFORMATION

REEL DIMENSIONS

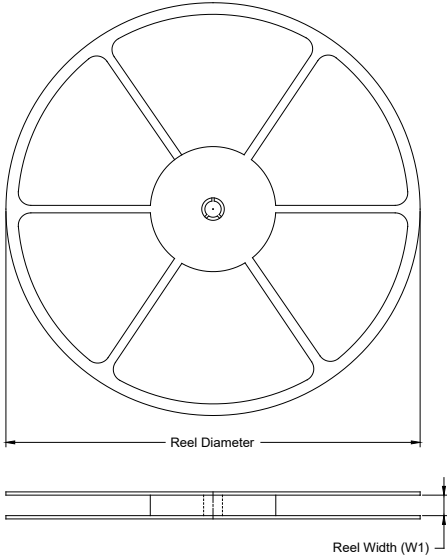

TAPE DIMENSIONS

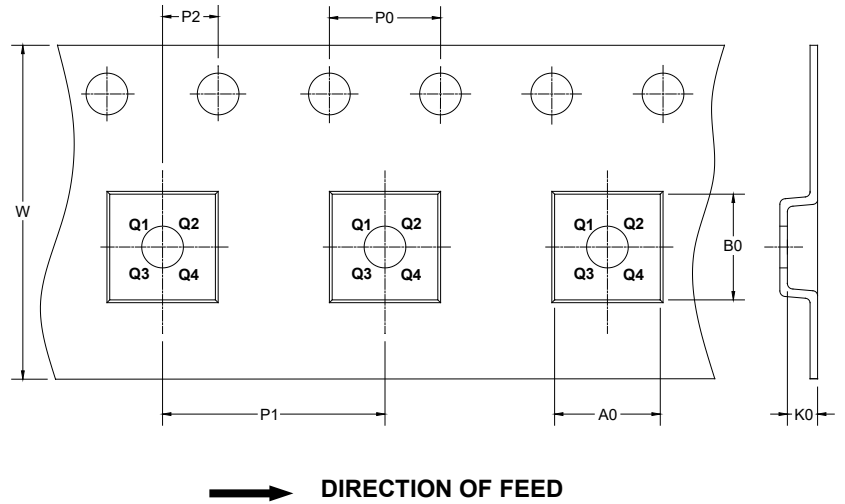

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
TSSOP-16	13"	12.4	6.90	5.60	1.20	4.0	8.0	2.0	12.0	Q1
SOIC-16	13"	16.4	6.50	10.30	2.10	4.0	8.0	2.0	16.0	Q1

000001

# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002

单击下面可查看定价，库存，交付和生命周期等信息

[>>SGMICRO\(圣邦微电子\)](#)