

GENERAL DESCRIPTION

The SGM6603 is a constant frequency, current mode, synchronous boost switching regulator. The input voltage can accept the voltage at a range from 0.9V to 5.5V. And the output voltage is adjustable with a peak of 5.5V. This device also has the 3.3V and 5.0V fixed output versions.

High switching frequency minimizes the sizes of inductor and capacitor. Integrated power MOSFETs and internal compensation make the SGM6603 simple to use and fit the total solution into a compact space.

The SGM6603 enters the power-save mode at light loads to maintain high efficiency. Anti-ringing control circuitry reduces EMI concerns by damping the inductor in discontinuous mode. The SGM6603 provides true output disconnection, allowing V_{OUT} to go to zero volt during shutdown without drawing any current from the input source.

The output voltage of SGM6603-ADJ can be programmed by an external resistor divider, and those of SGM6603-3.3/SGM6603-5.0 are fixed internally on the chip. The device is available in a Green SOT-23-6 package. It operates over an ambient temperature range of -40°C to $+85^{\circ}\text{C}$.

FEATURES

- 0.9V to 5.5V Input Voltage Range
- 3.3V and 5.0V Fixed Output Voltages
- Adjustable Output Voltage up to 5.5V
- 90% Peak Efficiency
- 30 μA (TYP) Quiescent Current
- 1 μA (MAX) Shutdown Current
- 6V Output Voltage Clamping
- Improved Light Load Efficiency with Power-Save Mode (PSM)
- Load Disconnected in Shutdown
- Over-Temperature Protection
- Available in a Green SOT-23-6 Package
- -40°C to $+85^{\circ}\text{C}$ Operating Temperature Range

APPLICATIONS

- Single-Cell Li Battery Powered Products
- Portable Audio Players
- Mobile Phones
- Personal Medical Devices

TYPICAL APPLICATION


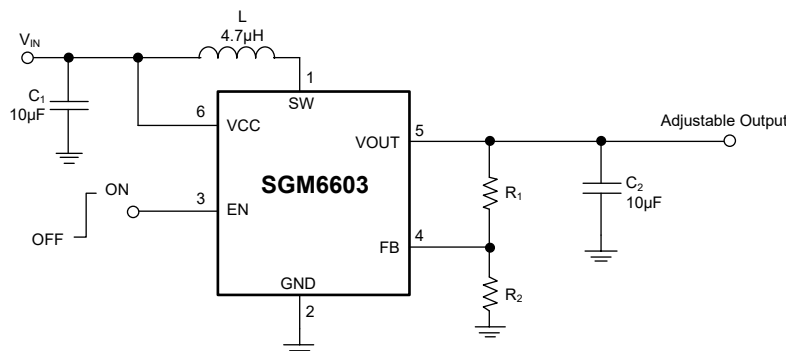


Figure 1. Typical Application Circuit

PIN CONFIGURATION

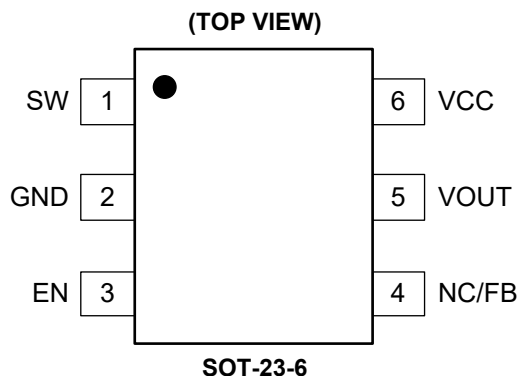

PIN DESCRIPTION







PIN	NAME	FUNCTION
1	SW	Boost and Rectifying Switch Input.
2	GND	Ground.
3	EN	Enable Input.
4	NC	No Connect. It should be left floating. (SGM6603-3.3/SGM6603-5.0)
	FB	Output Voltage Feedback Pin. An external resistor divider programs the output voltage. (SGM6603-ADJ)
5	VOUT	Output.
6	VCC	Supply Voltage.

ELECTRICAL CHARACTERISTICS







(Full = -40°C to +85°C, typical values are at $T_A = +25^\circ\text{C}$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS	
DC/DC Stage								
Output Voltage Range	V_{OUT}		Full	2.5		5.5	V	
Minimum Input Voltage Range for Startup	V_{IN}	$R_L = 3.3\text{k}\Omega$	Full		0.9	1.3	V	
		$R_L = 270\Omega$	Full		1.1	1.4		
Input Voltage Range after Startup	V_{IN}		+25°C	0.9		5.5		
Feedback Voltage	V_{FB}		Full	485	500	519	mV	
Oscillator Frequency	f		Full	870	1200	1470	kHz	
Switch Current Limit	I_{SW}		Full	0.75	1.1	1.45	A	
Startup Current Limit			+25°C		300		mA	
Boost Switch-On Resistance		$V_{OUT} = 3.3\text{V}$	+25°C		480		mΩ	
Rectifying Switch-On Resistance		$V_{OUT} = 3.3\text{V}$	+25°C		600		mΩ	
Output Voltage Accuracy		$V_{CC} = 1.2\text{V}$, $I_O = 10\text{mA}$	Full			3.8	%	
Line Regulation		$V_{CC} = 0.9\text{V}$ to $V_{OUT} - 0.5\text{V}$, $I_O = 10\text{mA}$	Full		0.1	1	%	
Load Regulation			+25°C		0.5		%	
Quiescent Current	V_{CC}	$V_{EN} = V_{CC} = 1.2\text{V}$, $I_O = 0\text{mA}$	Full		0.1	1	μA	
	V_{OUT}		$V_{OUT} = 3.3\text{V}$	+25°C		30	45	μA
			$V_{OUT} = 5\text{V}$	+25°C		33	55	
Shutdown Current		$V_{EN} = 0\text{V}$, $V_{CC} = 1.2\text{V}$	+25°C			1	μA	
Control Stage								
EN Input Low Voltage	V_{IL}	$0.9\text{V} \leq V_{CC} \leq 1.8\text{V}$	Full			$0.12 \times V_{CC}$	V	
		$1.8\text{V} < V_{CC} \leq 3.3\text{V}$	Full			0.5		
		$3.3\text{V} < V_{CC} \leq 4.2\text{V}$	Full			0.6		
		$4.2\text{V} < V_{CC} \leq 5.0\text{V}$	Full			0.6		
EN Input High Voltage	V_{IH}	$0.9\text{V} \leq V_{CC} \leq 1.8\text{V}$	Full	$0.8 \times V_{CC}$			V	
		$1.8\text{V} < V_{CC} \leq 3.3\text{V}$	Full	2				
		$3.3\text{V} < V_{CC} \leq 4.2\text{V}$	Full	2.4				
		$4.2\text{V} < V_{CC} \leq 5.0\text{V}$	Full	2.6				
EN Input Current		Clamped on GND or VCC	Full			1	μA	
Over-Temperature Protection					150		°C	
Over-Temperature Hysteresis					20		°C	







TYPICAL PERFORMANCE CHARACTERISTICS

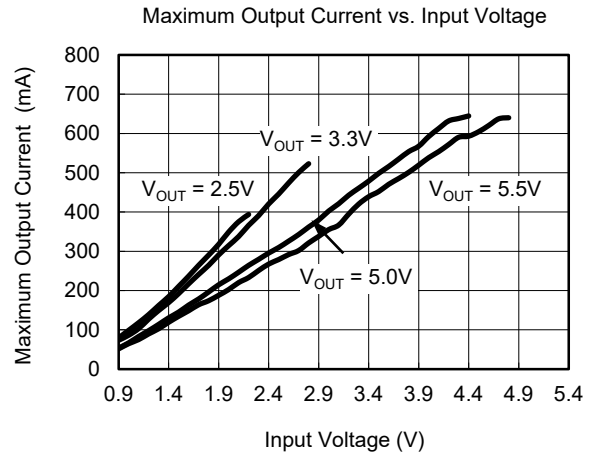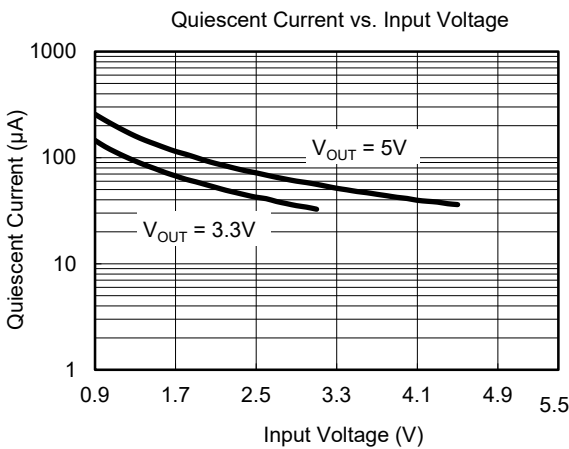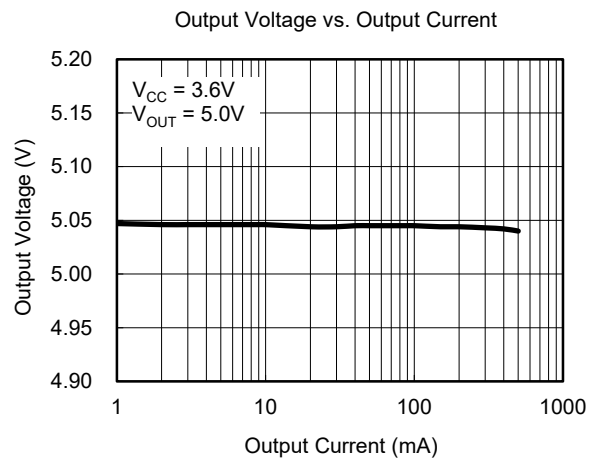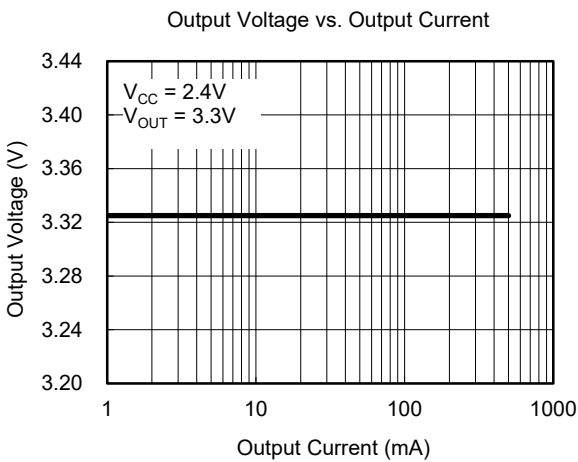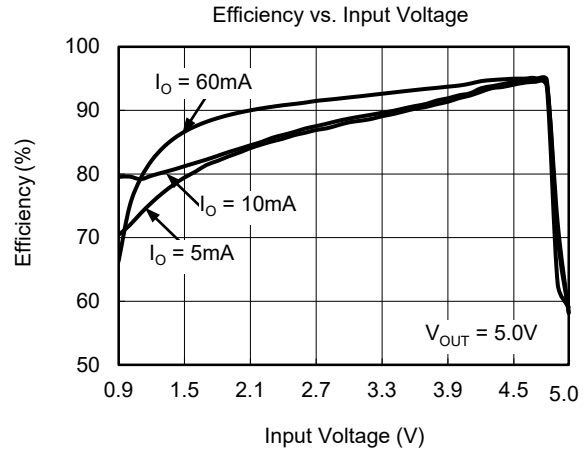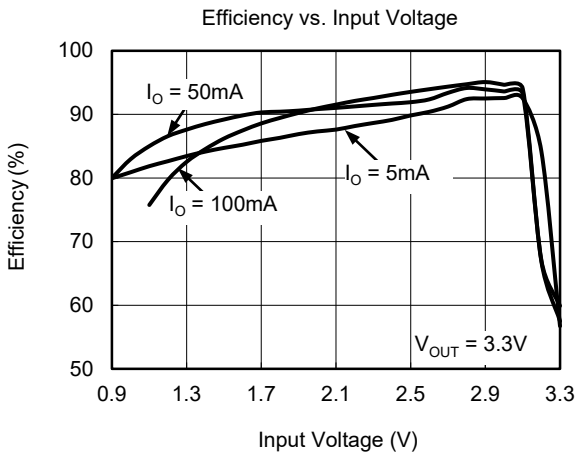


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

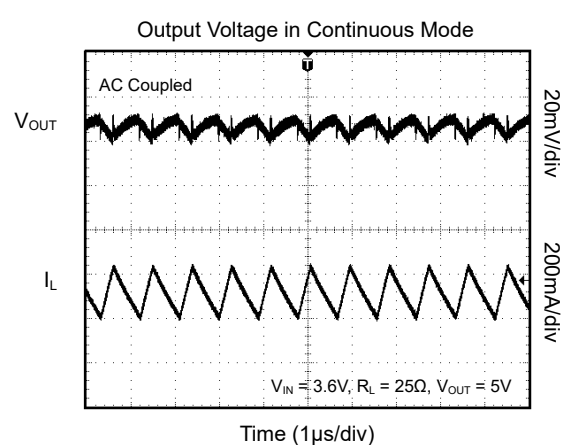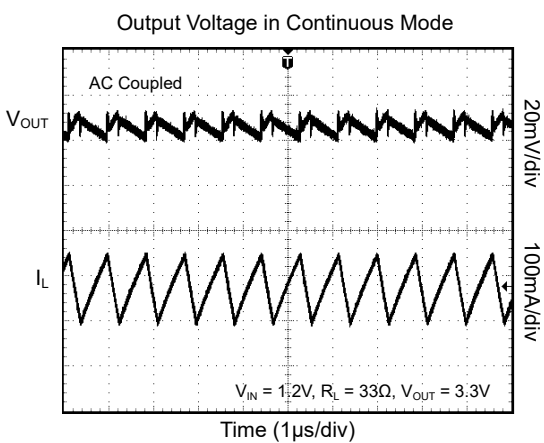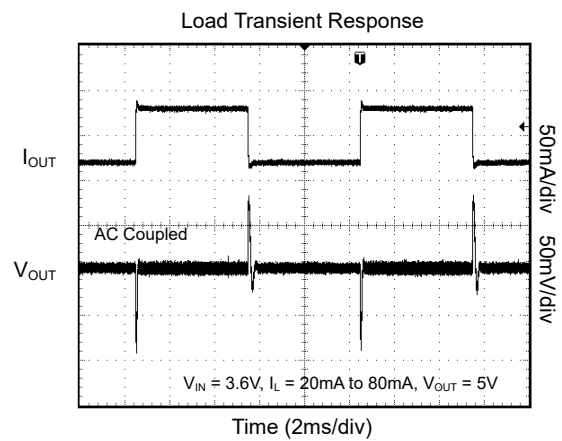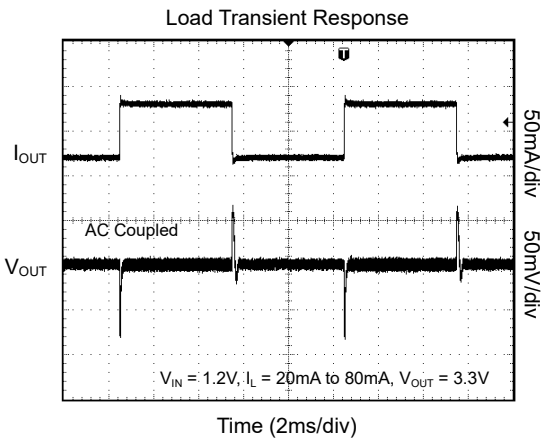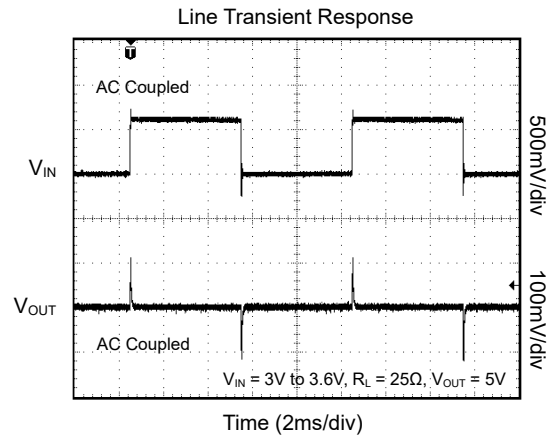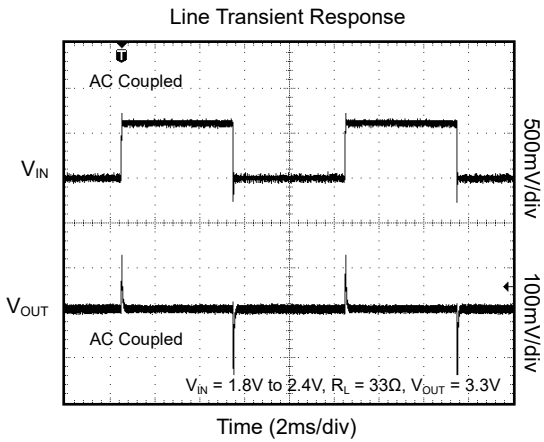

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

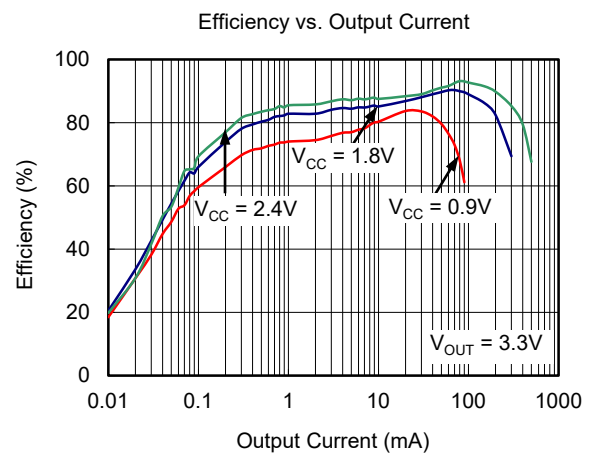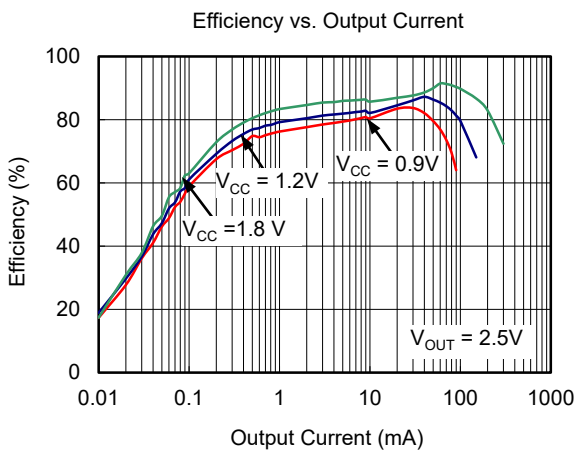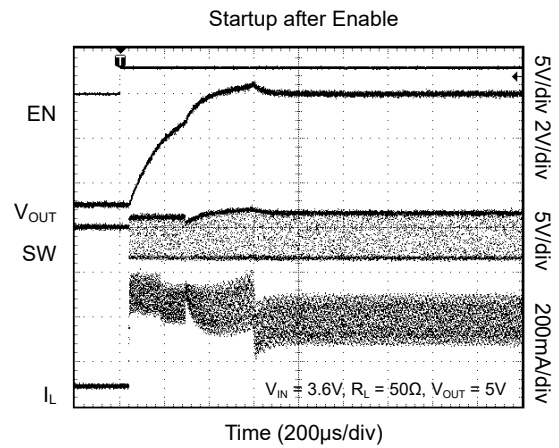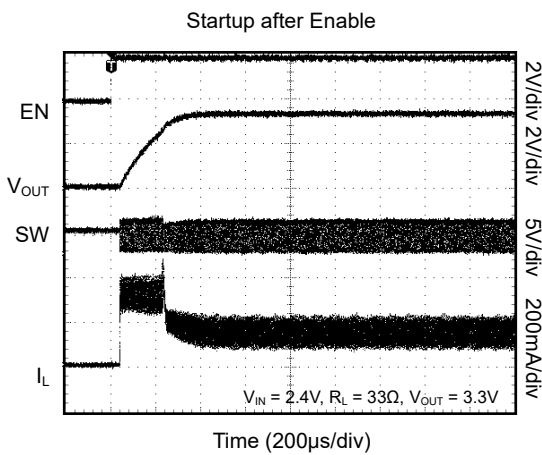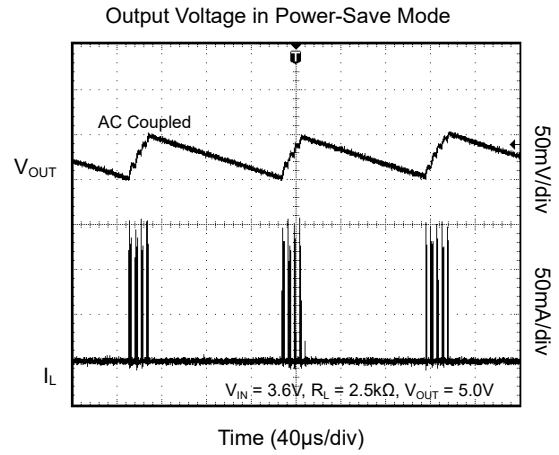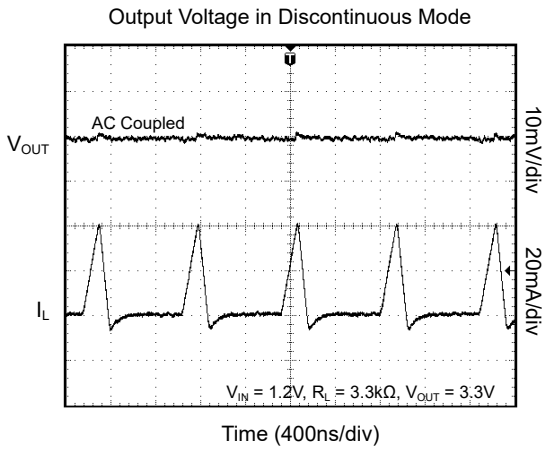

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

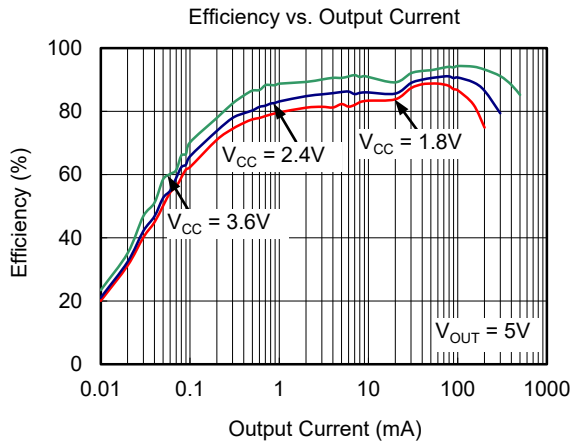

TYPICAL APPLICATION CIRCUITS

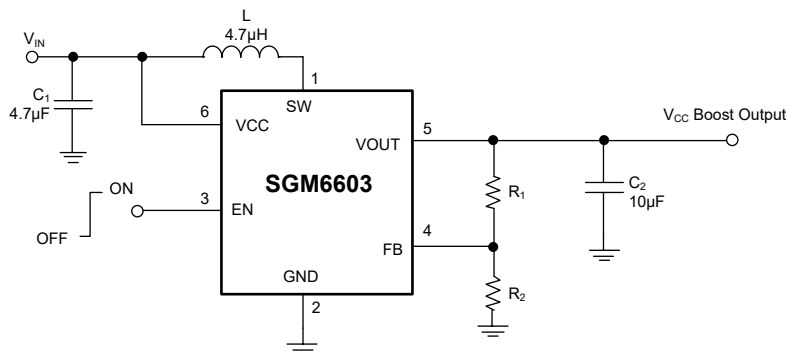


Figure 2. Small Total Solution Size Power Supply Circuit

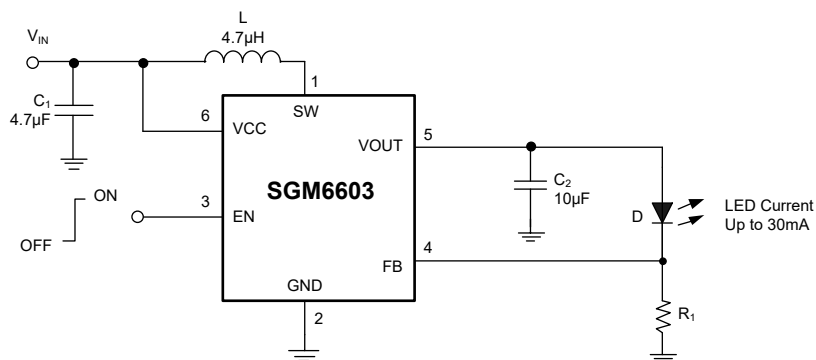


Figure 3. Circuit of Powering White LEDs in Lighting Applications

FUNCTIONAL BLOCK DIAGRAM

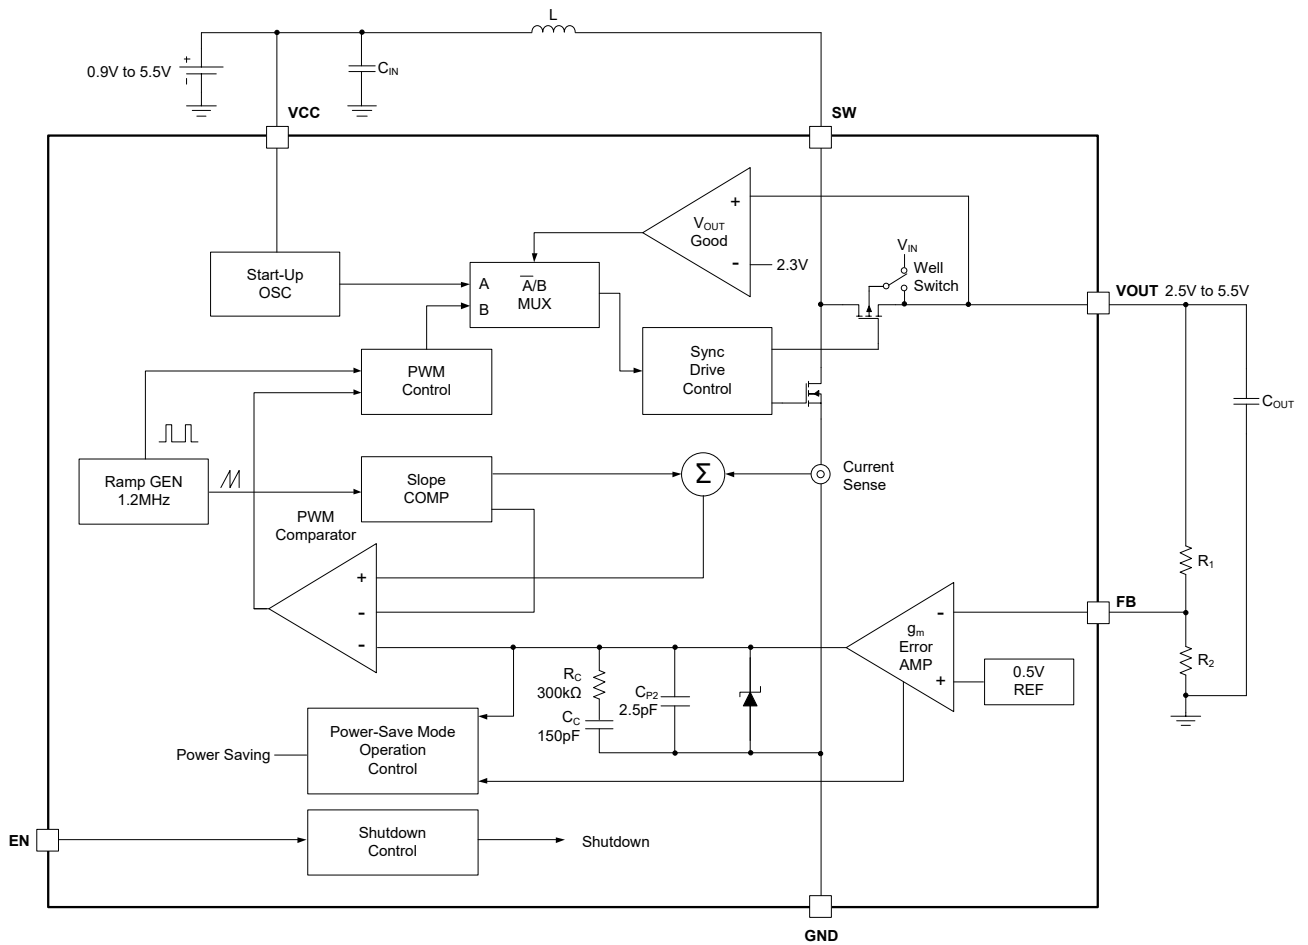


Figure 4. Block Diagram

APPLICATION INFORMATION

Design

The SGM6603 is a synchronous boost converter capable of starting up from 0.9V input, which is suitable for majority of readily available input sources. The device is capable of providing up to 5.5V output, and the integrated power MOSFET has 1.1A (TYP) switch current limit.

Startup

After enabling, the device works with a fixed duty cycle of 50% and reduces current limit of 400mA until the output voltage reaches to 2.3V. And then the current limit will be set to 50% of its nominal value to avoid high peak current drawn from the input during startup. The current limit is gradually increased to the nominal value as the output voltage reaches regulation target.

Output Voltage Configuration

The SGM6603 supports output voltage up to 5.5V, and a resistor divider connected at FB pin is used to configure the output voltage. The resistive divider value is calculated via Equation 1.

$$\frac{V_{OUT} - V_{FB}}{R1} = \frac{V_{FB}}{R2} \quad (1)$$

For simplicity, 100kΩ is recommended for R₂. A 560kΩ resistor for R₁ configures the output voltage to 3.3V.

Inductor Selection

Inductor is an essential element for today's DC/DC switch mode power supplies regardless of topology. Inductor serves as the energy storage element for

power conversion. Inductance and inductor's saturation current are two most important criteria for inductor selection. For general rule of thumb, the selected inductance should provide a peak to peak ripple current that is around 30% of the average inductor current at full load and nominal input voltage. The average inductor current for a boost converter is the input current. Equation 2 shows the calculation of inductance selection, where f is the switching frequency, ΔI_L is the inductor ripple current.

$$L = \frac{V_{CC}}{\Delta I_L \times f_{SW}} \times \left(1 - \frac{V_{IN}}{V_O} \right) \quad (2)$$

The selected inductor should have a saturation current rating higher than the 1.1A current limit of SGM6603.

Lastly, the inductor affects the close loop response of the DC/DC converter. The SGM6603 is an internally compensated device with the loop response optimized for inductor in the range of 2.2μH to 10μH.

Input Capacitor

Boost converter's input capacitor sees continuous current throughout the entire switching cycle. A 10μF ceramic capacitor is recommended to place as close as possible between the VCC pin and GND pin of SGM6603. For the applications where the SGM6603 is located far away from the input source, a 47μF or higher capacitance capacitor is recommended to damp the wiring harness's inductance.



REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



SEPTEMBER 2021 – REV.A.4 to REV.B	Page
Added Figure 5 Layout Example section	15
AUGUST 2021 – REV.A.3 to REV.A.4	Page
Added the Functional Block Diagram and Startup sections	12, 13
FEBRUARY 2018 – REV.A.2 to REV.A.3	Page
Update the Typical Performance Characteristics Efficiency vs. Input Voltage ($V_{OUT} = 3.3V$, $V_{OUT} = 5.0V$)	5
APRIL 2015 – REV.A.1 to REV.A.2	Page
Update the Electrical Characteristics V_{IH} ($0.9V \leq V_{CC} \leq 1.8V$) 1.5V - $0.8V_{CC}$	4
JANUARY 2015 – REV.A to REV.A.1	Page
Update the Electrical Characteristics Switch Current Limit	4
Add dot on pin 1 SOT-23-6	3, 14
Changes from Original (JANUARY 2013) to REV.A	Page
Changed from product preview to production data	All

PACKAGE OUTLINE DIMENSIONS

SOT-23-6

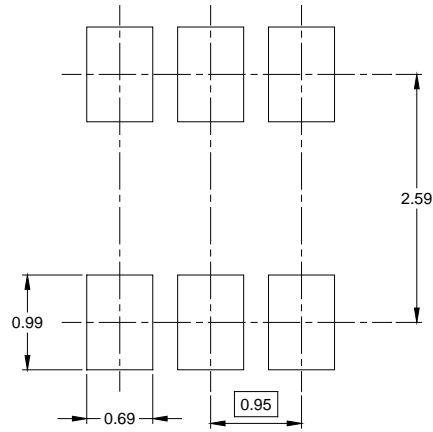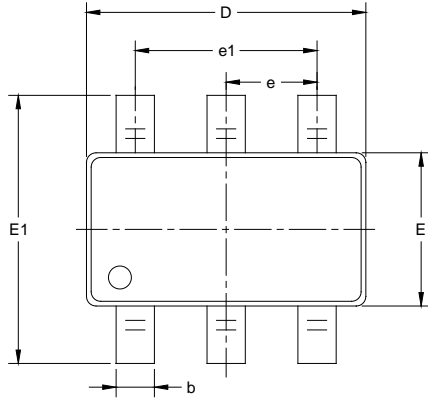

RECOMMENDED LAND PATTERN (Unit: mm)

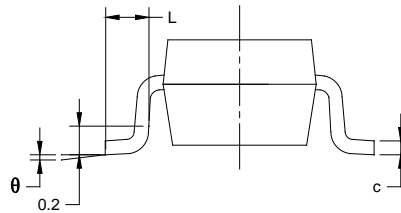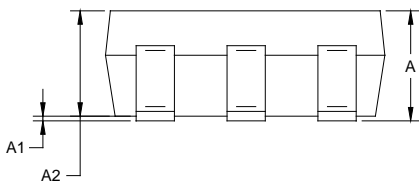

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

NOTES:

1. Body dimensions do not include mode flash or protrusion.
2. This drawing is subject to change without notice.

TAPE AND REEL INFORMATION

REEL DIMENSIONS



TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-6	7"	9.5	3.17	3.23	1.37	4.0	4.0	2.0	8.0	Q3

000001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002

单击下面可查看定价，库存，交付和生命周期等信息

[>>SGMICRO\(圣邦微电子\)](#)