


## Programmable Precision Reference

### Features:

- Programmable output Voltage to 36 V
- Low dynamic output impedance
- Sink current capability of 1 to 100 mA
- Low output noise voltage
- Fast turn on response



1.Cathode 2.Reference 3.Anode  
SOT-23 Plastic Package

### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ , unless otherwise noted.)

| Parameter                          | Symbol    | Value          | Unit             |
|------------------------------------|-----------|----------------|------------------|
| Cathode Voltage                    | $V_{KA}$  | 37             | V                |
| Cathode Current Range (Continuous) | $I_{KA}$  | - 100 to + 150 | mA               |
| Reference Input Current Range      | $I_{REF}$ | - 0.05 to + 10 | mA               |
| Power Dissipation                  | $P_D$     | 350            | mW               |
| Operating Temperature Range        | $T_{opr}$ | - 25 to + 85   | $^\circ\text{C}$ |
| Junction Temperature               | $T_j$     | 150            | $^\circ\text{C}$ |
| Storage Temperature Range          | $T_{stg}$ | - 65 to + 150  | $^\circ\text{C}$ |

### Recommended Operating Conditions

| Parameter       | Symbol   | Min.      | Max. | Unit |
|-----------------|----------|-----------|------|------|
| Cathode Voltage | $V_{KA}$ | $V_{REF}$ | 36   | V    |
| Cathode Current | $I_{KA}$ | 1         | 100  | mA   |

### Characteristics at $T_a = 25\text{ }^\circ\text{C}$

| Parameter   | Symbol                         | Min.  | Typ. | Max.  | Unit          |
|---|--------------------------------|-------|------|-------|---------------|
| Reference Input Voltage<br>at $V_{KA} = V_{REF}$ , $I_{KA} = 10\text{ mA}$  | $V_{REF}$                      | 2.487 | 2.50 | 2.513 | V             |
| Deviation of Reference Input Voltage Over Temperature<br>at $V_{KA} = V_{REF}$ , $I_{KA} = 10\text{ mA}$ , $- 25\text{ }^\circ\text{C} \leq T_a \leq + 85\text{ }^\circ\text{C}$                              | $\Delta V_{REF}/\Delta T$      | -     | 4.5  | 17    | mV            |
| Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage<br>at $I_{KA} = 10\text{ mA}$   | $\Delta V_{REF}/\Delta V_{KA}$ | -     | -1.0 | -2.7  | mV/V          |
|   |                                | -     | -0.5 | -2    |               |
| Reference Input Current<br>at $I_{KA} = 10\text{ mA}$ , $R_1 = 10\text{ K}\Omega$ , $R_2 = \infty$  | $I_{REF}$                      | -     | 1.5  | 4     | $\mu\text{A}$ |
| Deviation of Reference Input Current Over Full Temperature<br>at $I_{KA} = 10\text{ mA}$ , $R_1 = 10\text{ K}\Omega$ , $R_2 = \infty$ , $- 25\text{ }^\circ\text{C} \leq T_a \leq + 85\text{ }^\circ\text{C}$ | $\Delta I_{REF}/\Delta T$      | -     | 0.4  | 1.2   | $\mu\text{A}$ |
| Minimum Cathode Current for Regulation<br>at $V_{KA} = V_{REF}$   | $I_{KA(min)}$                  | -     | 0.45 | 1     | mA            |
| Off-Stage Cathode Current<br>at $V_{KA} = 36\text{ V}$ , $V_{REF} = 0$  | $I_{KA(OFF)}$                  | -     | 0.05 | 1     | $\mu\text{A}$ |
| Dynamic Impedance<br>at $V_{KA} = V_{REF}$ , $I_{KA} = 1\text{ to }100\text{ mA}$ , $f \leq 1\text{ KHz}$   | $Z_{KA}$                       | -     | 0.15 | 0.5   | $\Omega$      |

Fig 1 Cathode Current Vs Cathode Voltage

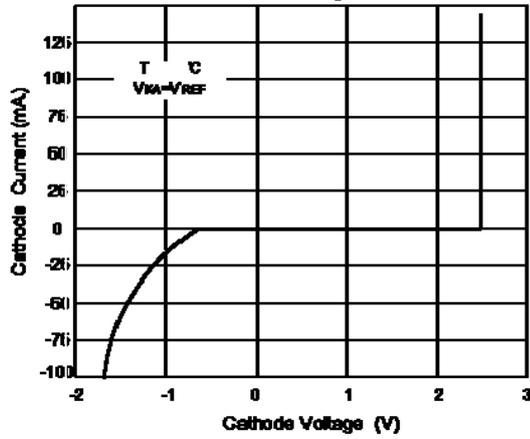


Fig 2 Cathode Current Vs Cathode Voltage

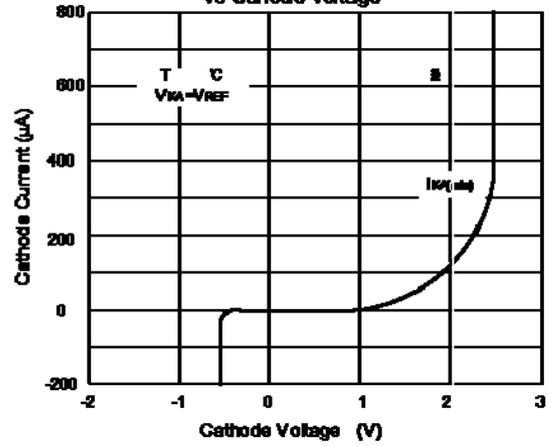


Fig 3 Change in Reference Input Voltage Vs Cathode voltage

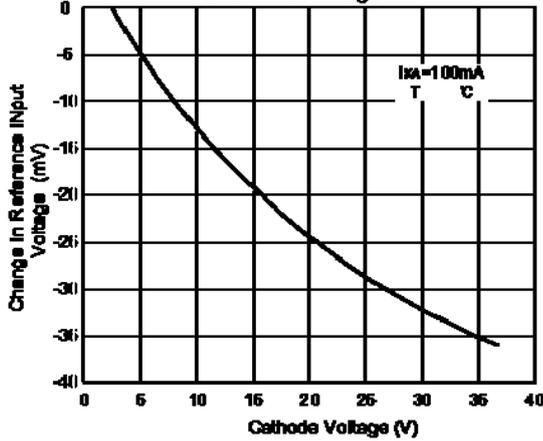


Fig 4 Pulse Response

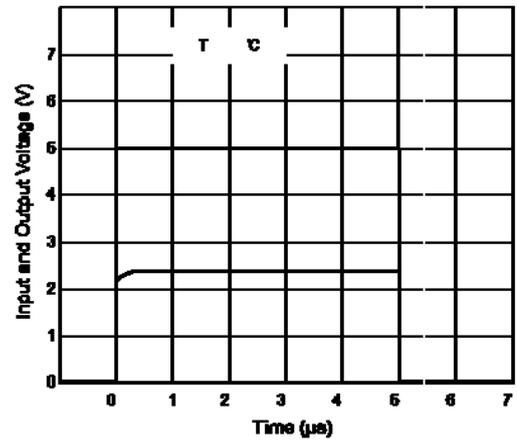


Fig 5 Dynamic Impedance Vs Frequency


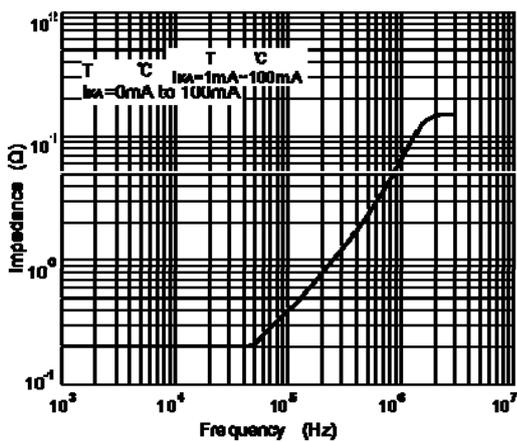



Fig 6 Small Signal Voltage Amplification Vs Frequency

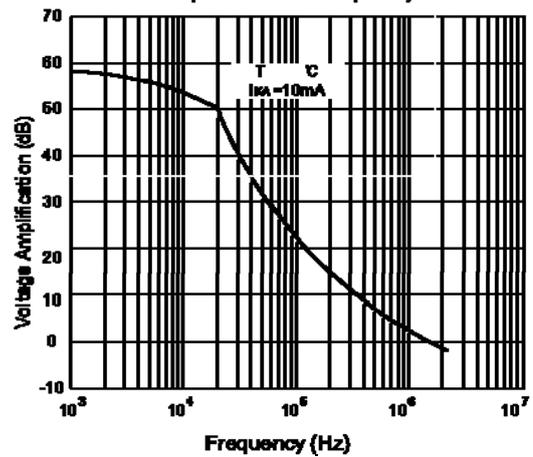

## PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

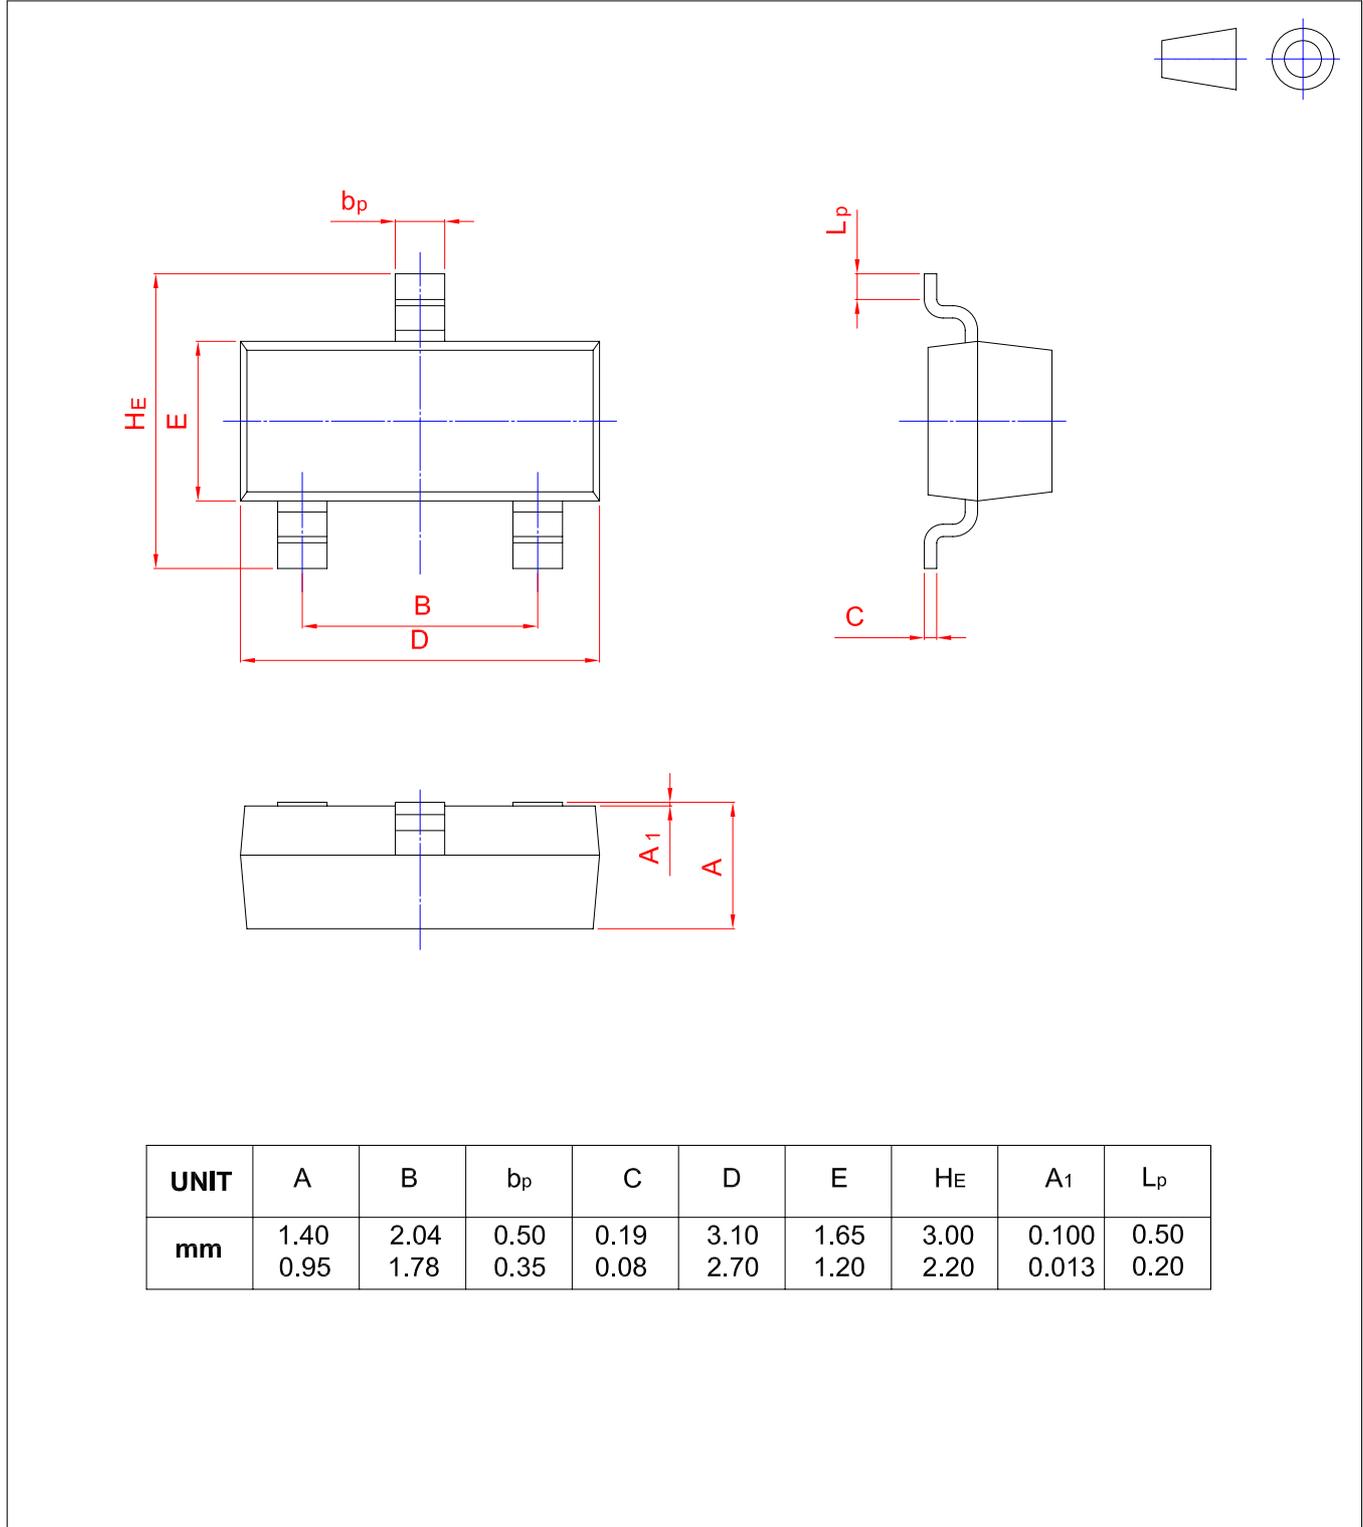

单击下面可查看定价，库存，交付和生命周期等信息

[>>SHIKUES\(时科\)](#)