

DESCRIPTION

The 431 is three-terminal adjustable regulator with a guaranteed thermal stability over applicable temperature ranges. The output Voltage may be set to any value between V_{ref} (approximately 2.5V) and 36 V with two external resistors. These devices have provides a very sharp turn-on characteristic, making these devices excellent replacement for zener diodes in many applications.

*Chip Size(before saw): 0.68*0.62 (mm)²

*Wafer Size : 5 inch

*PAD Size: 85*85(μ m)²

*Top Metal: AlSi, Thickness: 2 μ m


*Backside: Si

*Surface Passivation: PESiO₂+PESiN

*Chip Thickness: before grind :525 \pm 15 (μ m);
after grind:230 \pm 20 (μ m)

*Scribe Line: 30 μ m

SOT-89

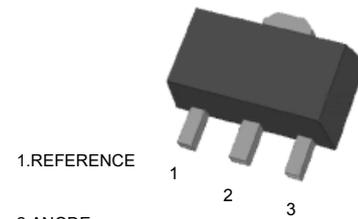

1.REFERENCE

2.ANODE

3.CATHODE

FEATURE

*Programmable output Voltage to 36V

*Low dynamic output impedance 0.2 Ω

*Sink current capability of 0.5 to 100mA



*Equivalent full-range temperature coefficient of 50ppm/ $^{\circ}$ C typical

*Temperature compensated for operation over full rated operating temperature range

*Low output noise voltage

*Fast turn on response

BLOCK DIAGRAM

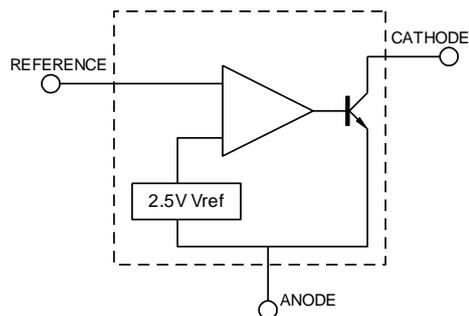

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

CHARACTERISTICS	SYMBOL	VALUE	UNITS
Cathode Voltage	V_{KA}	37	V
Cathode Current Range(Continuous)	I_{KA}	-100~+150	mA
Reference Input Current Range	I_{ref}	-0.05~+10	mA
Power Dissipation	P_D	TO-92	770
		SOT-23-3	370
Operating Junction temperature	T_{opr}	-40~+125	°C
Storage temperature	T_{stg}	-65~+150	°C

RECOMMENDED OPERATING CONDITIONS

Characteristic	Symbol	Min	Typ	Max	Unit
Cathode Voltage	V_{KA}	V_{REF}		36	V
Cathode Current	I_{KA}	0.5		100	mA

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$, unless otherwise specified)

Characteristic		Symbol	Test conditions	MIN	TYP	MAX	UNIT
Reference Input Voltage	0.5%	V_{ref}	$V_{KA}=V_{REF}, I_{KA}=10\text{mA}$	2.488	2.50	2.512	V
	1%			2.475	2.50	2.525	
	2%			2.450	2.50	2.550	
Deviation of reference Input Voltage Over temperature		ΔV_{ref}	$V_{KA}=V_{REF}, I_{KA}=10\text{mA}$ $T_{MIN} \leq T_A \leq T_{MAX}$		4.5	25	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage		$\Delta V_{ref}/\Delta V_{KA}$	$I_{KA}=10\text{mA}$	$\Delta V_{KA}=10\text{V} \sim V_{REF}$	-1.0	-2.7	mV/V
				$\Delta V_{KA}=36\text{V} \sim 10\text{V}$	-0.5	-2.0	
Reference Input Current		I_{ref}	$I_{KA}=10\text{mA}, R_1=10\text{k}\Omega, R_2=\infty$		1.5	4	μA
Deviation of Reference Input Current Over Full Temperature Range		$\Delta I_{ref}/\Delta T$	$I_{KA}=10\text{mA}, R_1=10\text{k}\Omega, R_2=\infty, T_A=\text{full Temperature}$		0.2	0.4	μA
Minimum cathode current for regulation		$I_{KA}(\text{min})$	$V_{KA}=V_{REF}$		0.3	0.5	mA
Off-state cathode Current		$I_{KA}(\text{OFF})$	$V_{KA}=36\text{V}, V_{REF}=0$		0.05	0.5	μA
Dynamic Impedance		Z_{KA}	$V_{KA}=V_{REF}, I_{KA}=1 \text{ to } 100\text{mA}$ $f \leq 1.0\text{kHz}$		0.15	0.5	Ω

TEST CIRCUITS




Fig 7 Test Circuit For $V_{KA}=V_{REF}$




Fig 8 Test Circuit for $V_{KA} \geq V_{REF}$




Fig 9 Test Circuit For $I_{KA(OFF)}$

TYPICAL APPLICATION




Fig 10 Shutdown Regulator




Fig 11 Output Control of a Three-Terminal Fixed Regulator




Fig 12 Higher-current Shunt Regulator




Fig 13 Constant-current Sink




Fig 14 Current Limiting or Current Source

TYPICAL PERFORMANCE CHARACTERISTICS

Fig 1 Cathode Current Vs Cathode Voltage

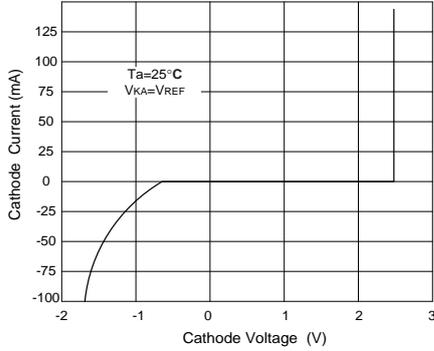


Fig 2 Cathode Current Vs Cathode Voltage

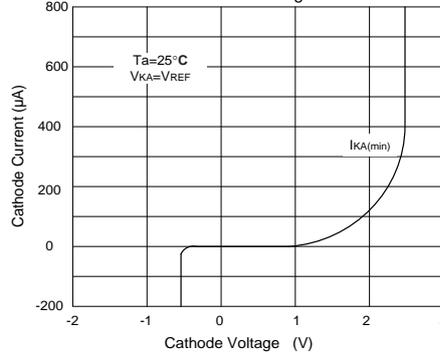


Fig 3 Change in Reference Input Voltage Vs Cathode voltage

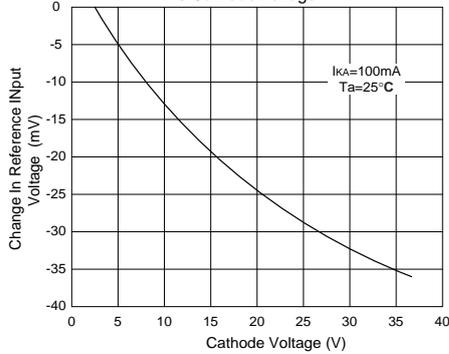


Fig 4 Pulse Response

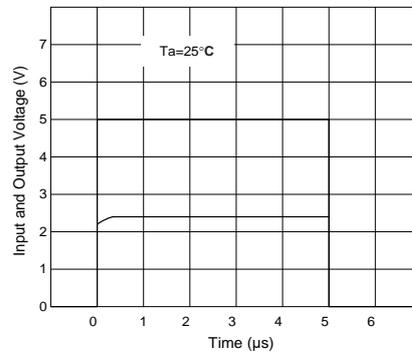


Fig 5 Dynamic Impedance Vs Frequency

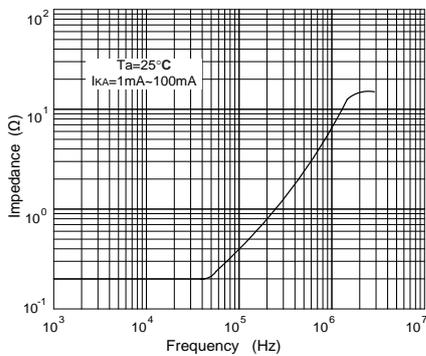


Fig 6 Small Signal Voltage Amplification Vs Frequency



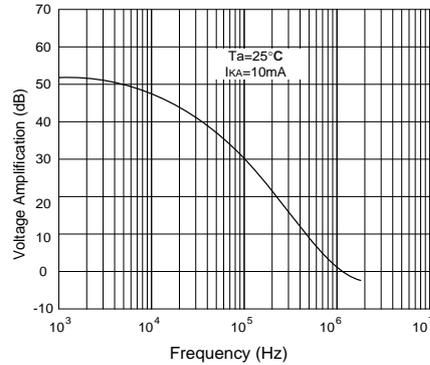


Fig 7 Cathode Current Vs Load Capacitance

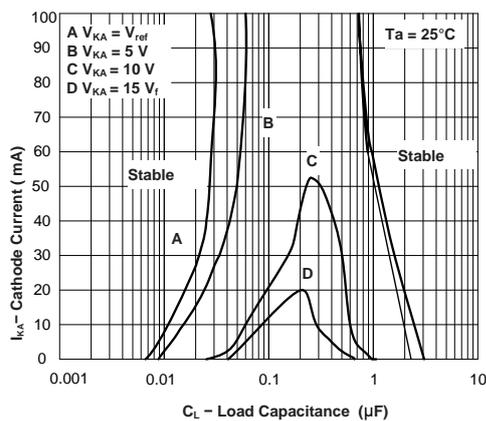

SOT-89 PACKAGE OUTLINE

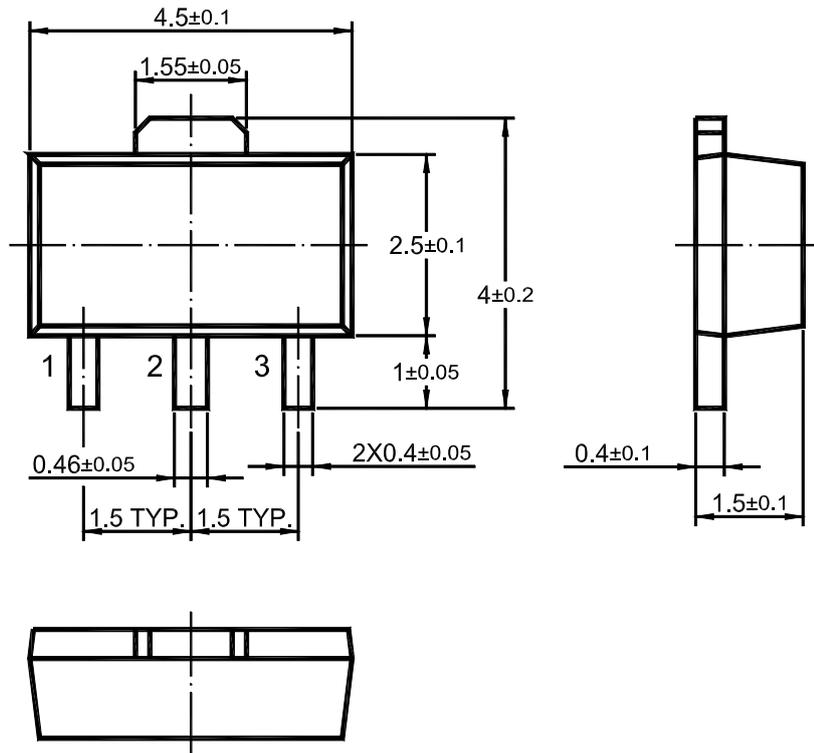

Dimensions in mm

单击下面可查看定价，库存，交付和生命周期等信息

[>>SHIKUES\(时科\)](#)