



Features

- Low driver power requirements (TTL/CMOS Compatible)
- No moving parts
- High reliability
- Arc-Free with no snubbing circuits
- 3750Vrms Input/Output isolation

Applications


- Telecommunications (PC, Electronic notepad)
- Measuring and Testing equipment
- Industrial control
- Security equipments
- High speed inspection machine



SMD8




DIP8

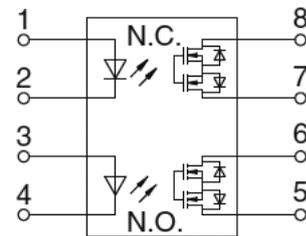


1,3.LED Anode
2,4.LED Cathode
5,6.Drain (MOSFET)1a
7,8.Drain (MOSFET)1b

Normally-On

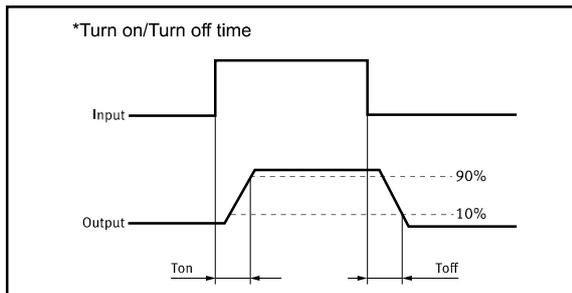

Normally-Off

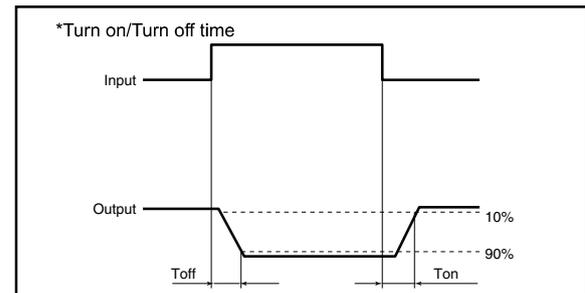

TYPES

| Category | Output rating | | Package | Part No. | Packing quantity |
|----------|---------------|--------------|---------|-----------|------------------|
| | Load voltage | Load current | | | |
| AC/DC | 400V | 0.12A | DIP8 | GAQW614E | 50pcs/tube |
| | | | SMD8 | GAQW614EH | 1000pcs/1reel |

Absolute Maximum Ratings (Ambient Temperature: 25 °C)













| Item | | Symbol | Value | Units | Note |
|---------------------------|--------------------------|-------------------|-------------|------------------|------------------|
| Input | Continuous LED Current | IF | 50 | mA | |
| | Peak LED Current | IFP | 1000 | mA | f=100Hz, duty=1% |
| | LED Reverse Voltage | VR | 5 | V | |
| | Input Power Dissipation | Pin | 75 | mW | |
| Output | Load Voltage | VL | 400 | V(AC peak or DC) | |
| | Load Current | IL | 120 | mA | |
| | Peak Load Current | I _{Peak} | 0.6 | A | 1ms(1 pulse) |
| | Output Power Dissipation | Pout | 450 | mW | |
| Total Power Dissipation | | PT | 500 | mW | |
| I/O Breakdown Voltage | | VI/O | 3750 | Vrms | RH=60%, 1min |
| Operating Temperature | | T _{opr} | -40 to +85 | -40 to +85 | |
| Storage Temperature | | T _{stg} | -40 to +100 | -40 to +100 | |
| Pin Soldering Temperature | | T _{sol} | 260 | 260 | 10 sec max. |

Electrical Specifications (Ambient Temperature: 25 °C)

| Item | | Symbol | MIN. | TYP. | MAX. | Units | Conditions |
|--------------|---------------------------|--------------------|------------------|------------|---------------------|-------|--|
| Input | LED Forward Voltage | V _F | | 1.2 | 1.5 | V | I _F =10mA |
| | Operation LED Current | I _{F on} | | 0.5 | 5.0 | mA | |
| | Recovery LED Current | I _{F off} | | 0.35 | 0.5 | mA | |
| | Recovery LED Voltage | V _{F off} | 0.5 | | | V | |
| Output | On-Resistance | R _{on} | | 20(N.O.) | 30(N.O.) | Ω | I _F =5mA (N.O.) I _F =0mA (N.C) I _L =100mA Time to flow is within 1 sec. |
| | | | | 20(N.C.) | 50(N.C.) | | |
| | Off-State Leakage Current | I _{Leak} | | | 1(N.O.) 10(N.C.) | μA | I _F =0mA (N.O.) I _F =5mA (N.C) V _L = Rating |
| | Output Capacitance | C _{out} | | 150 | | pF | I _F =5mA, V _L =0, f=1MHz |
| Transmission | Turn-On Time | T _{on} | | 0.23(N.O.) | 0.5(N.O.) | ms | I _F =5mA, I _L =50mA |
| | | | | 0.2(N.C.) | 1.0(N.C.) | | |
| | Turn-Off Time | T _{off} | | 0.03(N.O.) | 0.2(N.O.) | ms | |
| | | | | 0.5(N.C.) | 3.0(N.C.) | | |
| Coupled | I/O Isolation Resistance | R _{i/o} | 10 ¹⁰ | | | Ω | DC500V |
| | I/O Capacitance | C _{i/o} | | 0.8 | | pF | f=1MHz |

Please obey the following conditions to ensure proper device operation and resetting. Input LED current (Recommended value): I_F ≥5mA and ≤30mA.
 Examples of resistance value to control LED forward current (I_F=5mA, INPUT VOLTAGE="E", RESISTORS="R")
 "E"=3.3V, "R"=330Ω; "E"=5V, "R"=640Ω; "E"=12V, "R"=1.9KΩ; "E"=15V, "R"=2.5KΩ; "E"=24V, "R"=4.1KΩ;


Reference Data

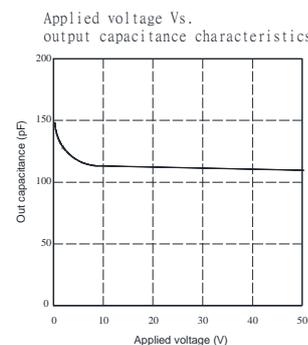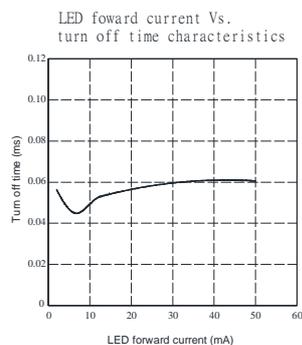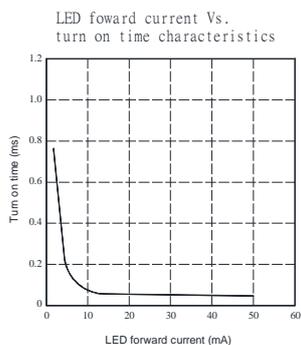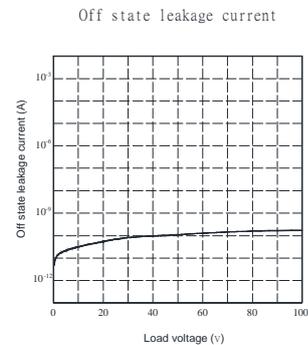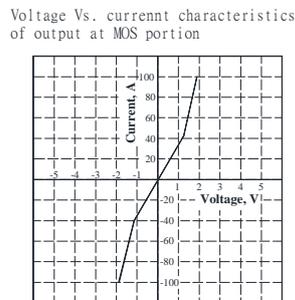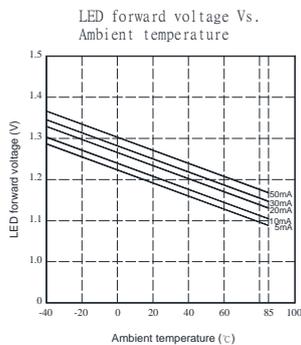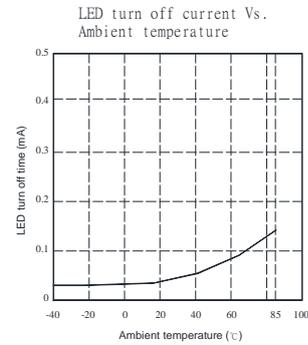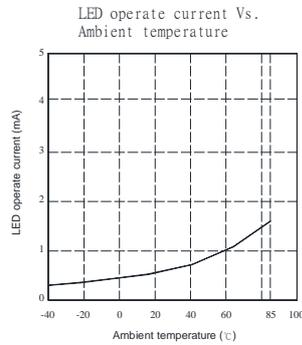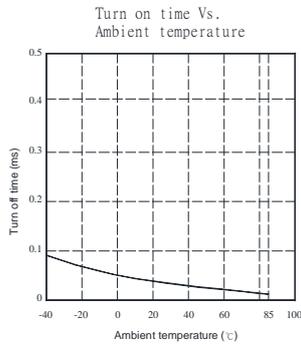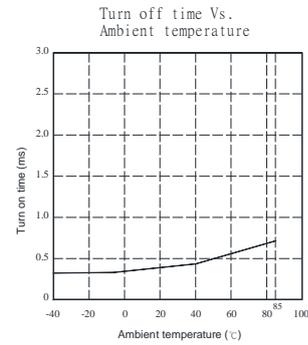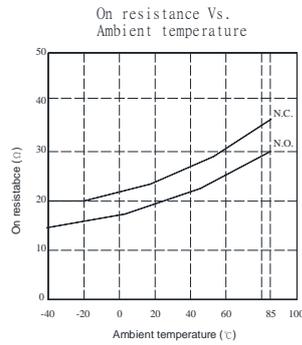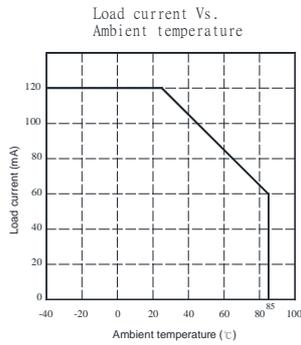

8-SMD

Dimensions



mm inch

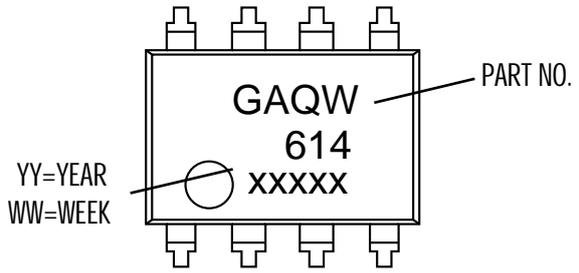

Surface mount terminal type


PC board pattern

(Top view)

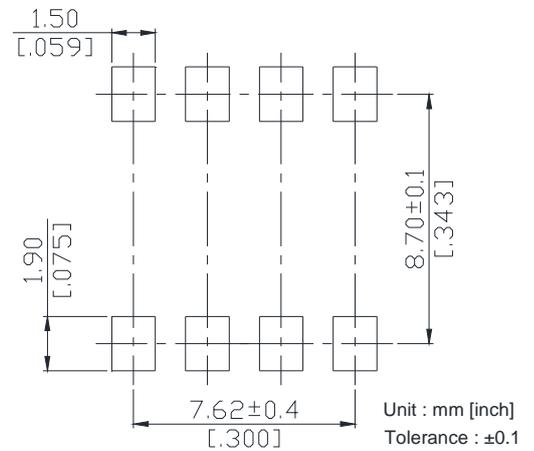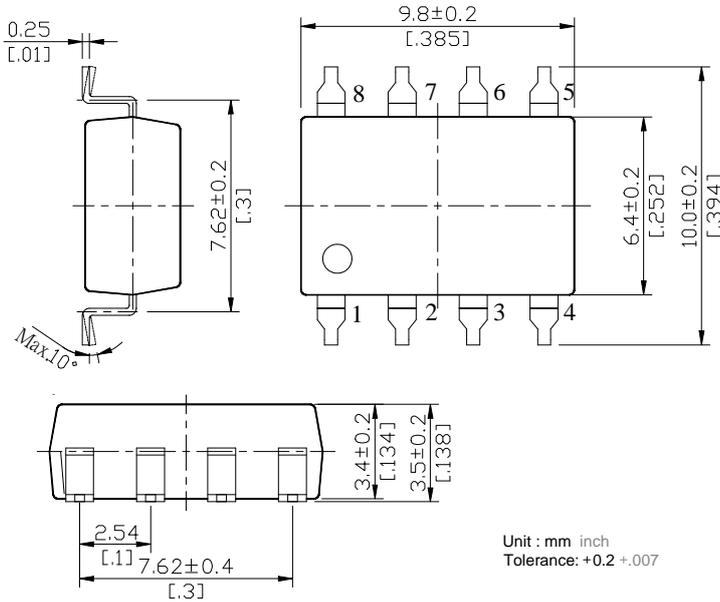


Tape dimensions

Direction of feed

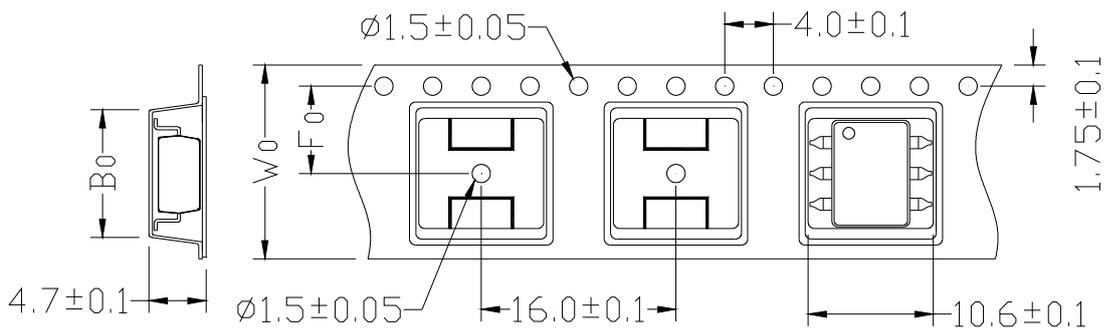


Dimensions of tape reel

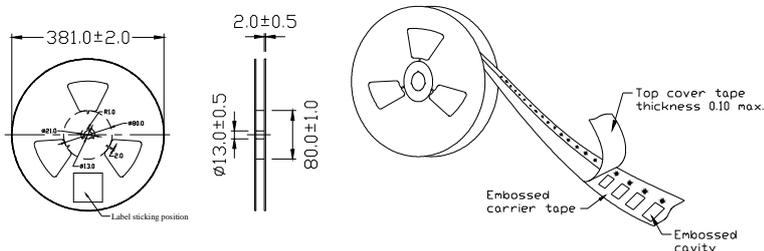


8-DIP


Dimensions

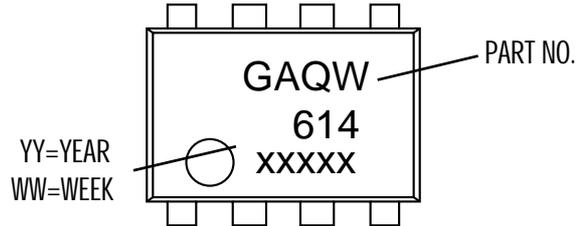

Through hole terminal type

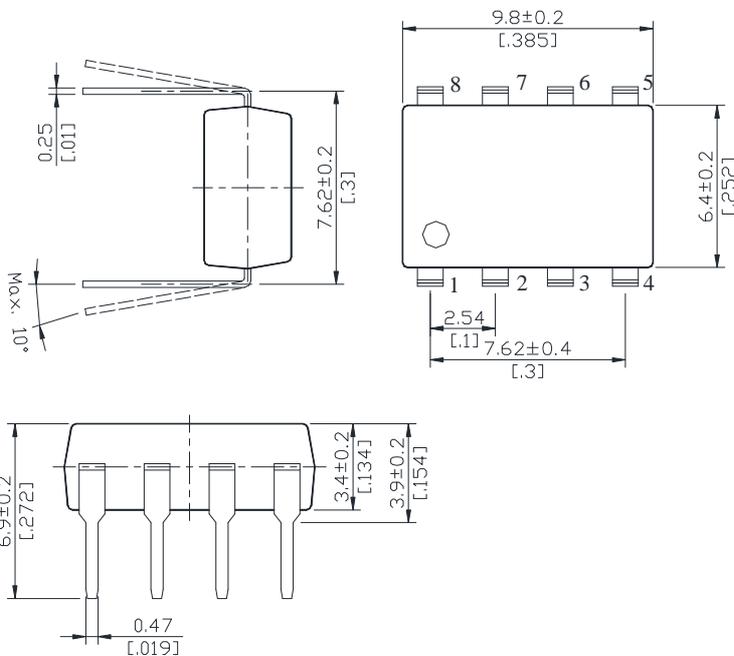


PC board pattern

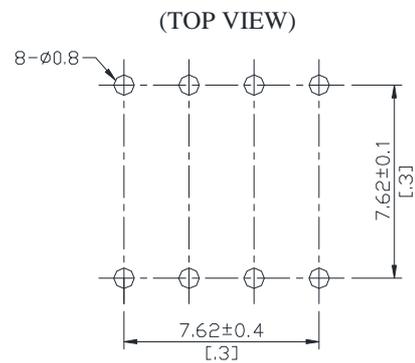

Unit : mm inch
 Tolerance : +0.2 +.007

DIP type

Devices are packaged in a tube so that pin No. 1 is on the stopper B side. Observe correct orientation when mounting them on PC boards.



单击下面可查看定价，库存，交付和生命周期等信息

[>>SUPSiC\(国晶微\)](#)