


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION NOV ,2006.

© COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C		REVISED PER ECO-09-003420	19FEB09	ANS	BOB

NOTES

- 1 SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2 100 PER BOX ACCORDANCE WITH AMP SPEC 107-3275
- 3 NICKEL PLATING
- 4 GOLD PLATING
- 5. FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
- 6. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

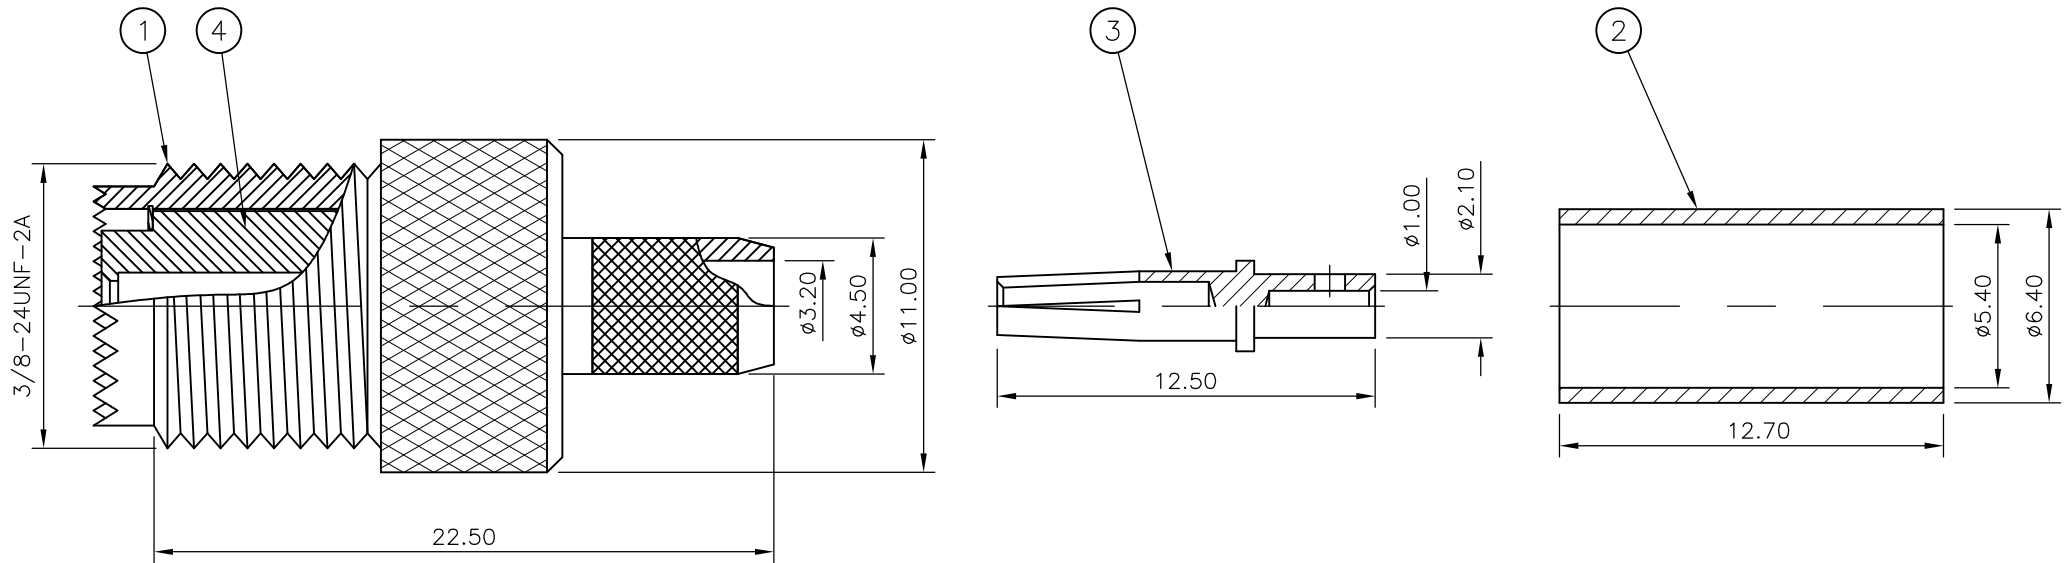


						1	1	POM	INSULATOR	4
						1	1	BRASS	CONTACT	3
						1	1	ZINC ALLOY	FERRULE	2
						1	1	BRASS	BODY	1
						5	15	MATERIAL	DESCRIPTION	ITEM
QUANTITY PER ASSY										PARTS LIST

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	ANSON MA		14FEB09	Tyco Electronics Corporation Kunshan, Jiangsu, PRC 215312	
DIMENSIONS: mm		CHK	RITA ZUO		14FEB09		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	BOB ZHAO		14FEB09	NAME	
0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC		108-112000		M-UHF STR JK HEX RG58C/U, 141A/U, URM43, 76, KX15	
MATERIAL SEE TABLE		FINISH SEE TABLE		APPLICATION SPEC		-	
		WEIGHT		-		SIZE	CAGE CODE
		CUSTOMER DRAWING		A3		00779	DRAWING NO
				G-1814819		RESTRICTED TO	
				SCALE		NTS	SHEET 1 OF 2
						REV C	


THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION NOV. 2004.		LOC	DIST	REVISIONS					
© COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.				E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
							-	SEE SHEET 1	-	-	-

ASSEMBLY INSTRUCTION
RG58C/U, 141A/U, URM43, 76, KX15



STEP 1
1. SLIDE METAL CRIMP FERRULE OVER CABLE

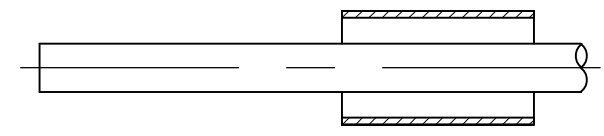


STEP 2
1. STRIP CABLE TO DIMENSIONS AS SHOWN

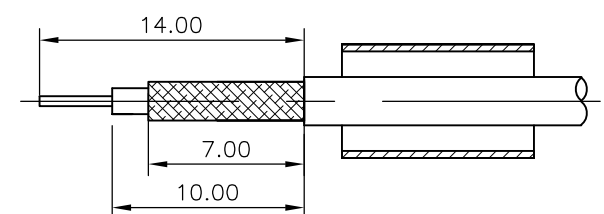



STEP 3
1. FIT CONTACT OVER CENTRE CONDUCTOR TO BUTT AGAINST DIELECTRIC.
2. CRIMP USING TOOL AS NOTES ON PAGE 1.

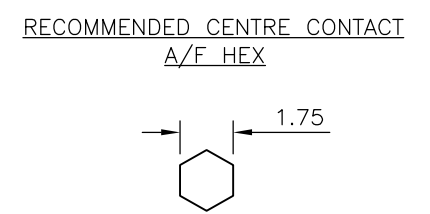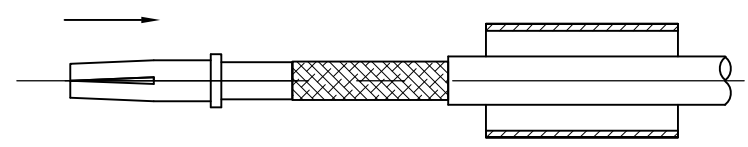

STEP 4
1. PRESS SUB-ASSEMBLY INTO BODY, UNTIL CONTACT IS FULLY LOCATED BY AN AUDIBLE CLICK.
2. ENSURE THAT KNURLED HOUSING INSERTS BETWEEN THE DIELECTRIC AND CABLE BRAID.

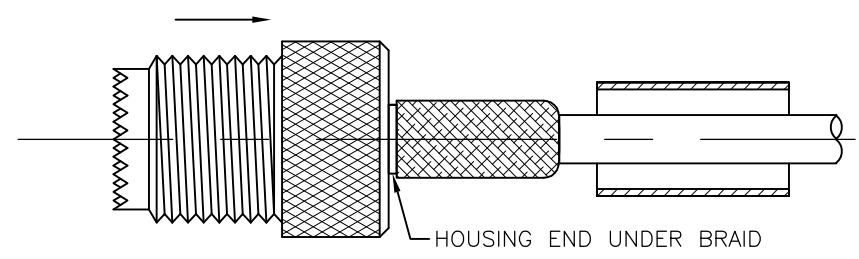

STEP 5
1. SLIDE CRIMP FERRULE ALONG THE CABLE UNTIL IT BUTTS AGAINST THE HOUSING BODY.
2. CRIMP USING TOOL AS NOTED ON PAGE 1.
3. CRIMP DIMENSION AS SHOWN.

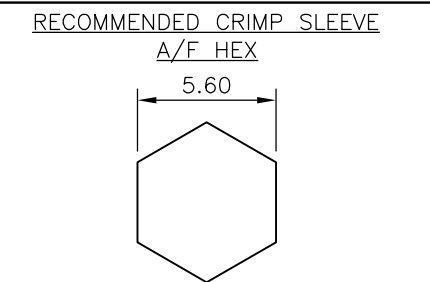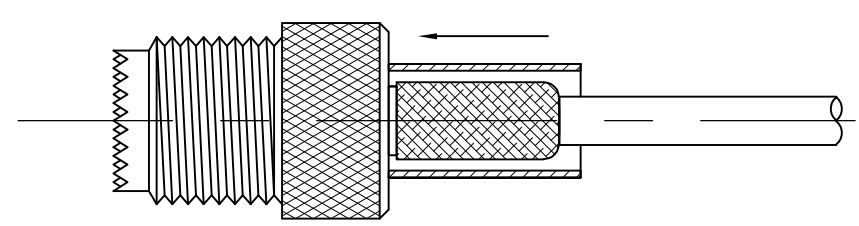

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	14FEB09	Tyco Electronics Corporation Kunshan, Jiangsu, PRC 215312	
DIMENSIONS: mm		ANSON	14FEB09	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	14FEB09	M-UHF STR JK HEX	
0 PLC ± -		RITA ZUO	14FEB09	RG58C/U, 141A/U, URM43, 76, KX15	
1 PLC ± -		APVD		-	
2 PLC ± -		BOB ZHAO		SIZE	CAGE CODE
3 PLC ± -		PRODUCT SPEC		A3	00779
4 PLC ± -		APPLICATION SPEC		DRAWING NO	RESTRICTED TO
ANGLES ± -		SHEET 2		C-1814819	-
FINISH		WEIGHT		SCALE	SHEET
SEE TABLE		-		NTS	2 OF 2
		CUSTOMER DRAWING		REV	C

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)