

12-Channel 1:2 MUX/DEMUX Switch with Integrated 4-Channel Sideband Signal Switching for DVI/HDMI and DisplayPort (DP) Applications

Check for Samples: [TS3DV621](#)

FEATURES

- **Switch Type:** 2:1 or 1:2
- **Data Rate Compatibility**
 - HDMI v1.4
 - DVI 1.0
 - DisplayPort 1.1a
- **Bandwidth (-3dB) – 2.2 GHz**
- **R_{ON} – 8 Ω**
- **C_{ON} – 5.6 pF**
- **V_{CC} Range – 3.0V–3.6 V**
- **I/O Voltage Range – 0–5 V**
- **Bit-to-Bit Skew – 6 ps Typical**
- **Propagation Delay – 40 ps Typical**
- **Special Features**
 - **Dedicated Enable Logic Supports Hi-Z Mode**
 - **I_{OFF} Protection Prevents Current Leakage in Powered Down State (V_{CC} = 0 V)**
- **ESD Performance**
 - **2kV Human Body Model (A114B, Class II)**
 - **1kV Charged Device Model (C101)**
- **42-pin QFN Package (9 x 3.5 mm, 0.5 mm Pitch)**

APPLICATIONS

- **DVI/HDMI/DisplayPort Signal Switching**
- **General Purpose TMDS/LVDS Signal Switching**


DESCRIPTION

The TS3DV621 is a 1:2 or 2:1 bi-directional multiplexer/demultiplexer with an integrated 4 side-band control channel (DDC, AUX, CEC, or HPD) signal switcher. Operating from a 3 to 3.6V supply, the TS3DV621 offers low and flat ON-state resistance as well as low I/O capacitance, which allows the TS3DV621 to achieve a typical bandwidth of 2.2 GHz. The device provides the high bandwidth necessary for HDMI, DVI, and DisplayPort applications. The TS3DV621 expands the high-speed physical link interface from a single HDMI port to two HDMI ports (A or B port) or vice-versa. It can also be used for DisplayPort (DP) source/sink applications. The integrated side-band control channels allow 5V signals to pass through, making the TS3DV621 suitable for HDMI applications.

The most common application for the TS3DV621 is the sink application. In this case, there are two possible sources (DVD, set-top box, or game console) that are routed to one receiver. The unselected port is in the high-impedance mode, such that the receiver receives information from only one source. HDCP encryption is passed through the switch for the receiver to decode.

ORDERING INFORMATION

For package and ordering information, see the Package Option Addendum at the end of this document.

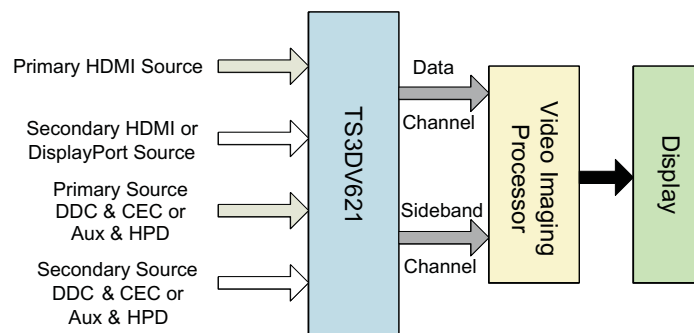
Figure 1. Multiplexing Dual Video Input Source (HDMI/DisplayPort)


Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

PIN FUNCTIONS

	PIN		I/O TYPE	DESCRIPTION
	NAME	NO.		
VCC	1, 17, 30	Power	Supply Voltage	
GND	PowerPad	Ground	Ground	
EN	8	I	Enable Input	
SEL1	9	I	Select Input 1	
SEL2	10	I	Select Input 2	
D0+	41	I/O	Port A, Lane 0, +ve signal	
D0-	39	I/O	Port A, Lane 0, -ve signal	
D1+	38	I/O	Port A, Lane 1, +ve signal	
D1-	36	I/O	Port A, Lane 1, -ve signal	
D2+	34	I/O	Port A, Lane 2, +ve signal	
D2-	32	I/O	Port A, Lane 2, -ve signal	
D3+	29	I/O	Port A, Lane 3, +ve signal	
D3-	27	I/O	Port A, Lane 3, -ve signal	
D0+B	42	I/O	Port B, Lane 0, +ve signal	
D0-B	40	I/O	Port B, Lane 0, -ve signal	
D1+B	37	I/O	Port B, Lane 1, +ve signal	
D1-B	35	I/O	Port B, Lane 1, -ve signal	
D2+B	33	I/O	Port B, Lane 2, +ve signal	
D2-B	31	I/O	Port B, Lane 2, -ve signal	
D3+B	28	I/O	Port B, Lane 3, +ve signal	
D3-B	26	I/O	Port B, Lane 3, -ve signal	
D0+	2	I/O	Common Port, Lane 0, +ve signal	
D0-	3	I/O	Common Port, Lane 0, -ve signal	
D1+	4	I/O	Common Port, Lane 1, +ve signal	
D1-	5	I/O	Common Port, Lane 1, -ve signal	
D2+	6	I/O	Common Port, Lane 2, +ve signal	
D2-	7	I/O	Common Port, Lane 2, -ve signal	
D3+	11	I/O	Common Port, Lane 3, +ve signal	
D3-	12	I/O	Common Port, Lane 3, -ve signal	
AUX+A	25	I/O	+ve AUX Channel for Port A	
AUX-A	23	I/O	-ve AUX Channel for Port A	
HPDA	21	I/O	Port A HPD	
CECA	19	I/O	Port A CEC	
AUX+B	24	I/O	+ve AUX Channel for Port B	
AUX-B	22	I/O	-ve AUX Channel for Port B	
HPDB	20	I/O	Port B HPD	
CECB	18	I/O	Port B CEC	
AUX+	13	I/O	+ve AUX Channel for Common Port	
AUX-	14	I/O	-ve AUX Channel for Common Port	
HPD	15	I/O	HPD for Common Port	
CEC	16	I/O	CEC for Common Port	

LOGIC DIAGRAM

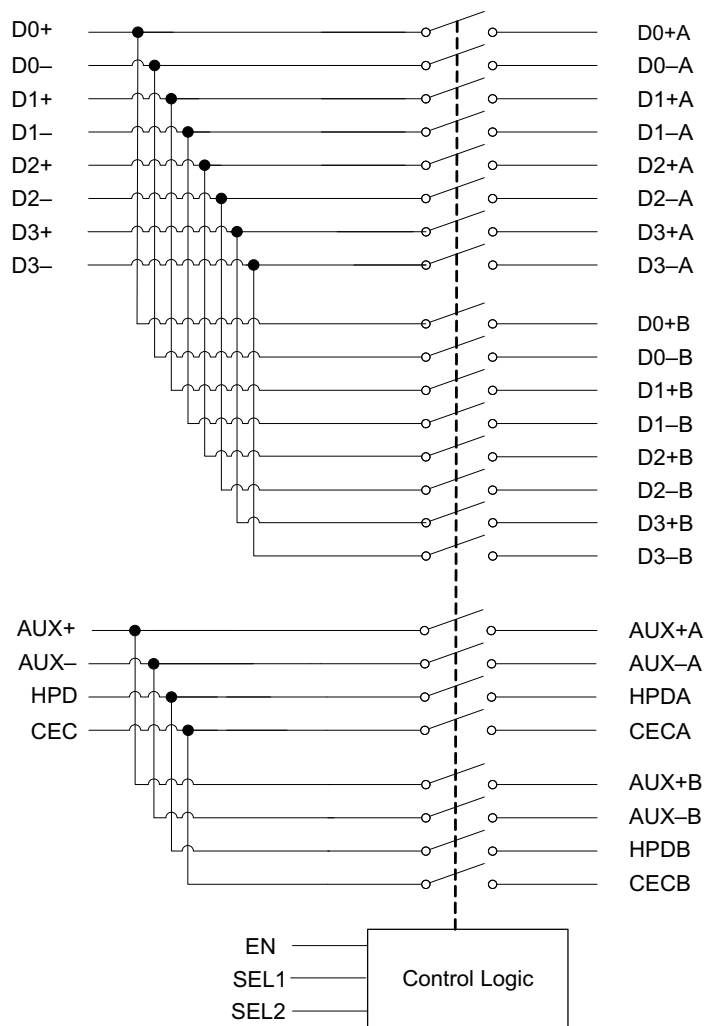


Table 1. FUNCTION TABLE

EN	SEL1	SEL2	FUNCTION
L	X	X	All I/O = High Impedance
H	L ⁽¹⁾	L ⁽¹⁾	Output port A = Input Output Port B = High Impedance
H	H ⁽¹⁾	H ⁽¹⁾	Output Port A = High Impedance Output Port B = Input

(1) Tie SEL1 and SEL2 together for easy output control

TS3DV621

SCDS330C – JANUARY 2012 – REVISED MAY 2013

www.ti.com

APPLICATION EXAMPLES

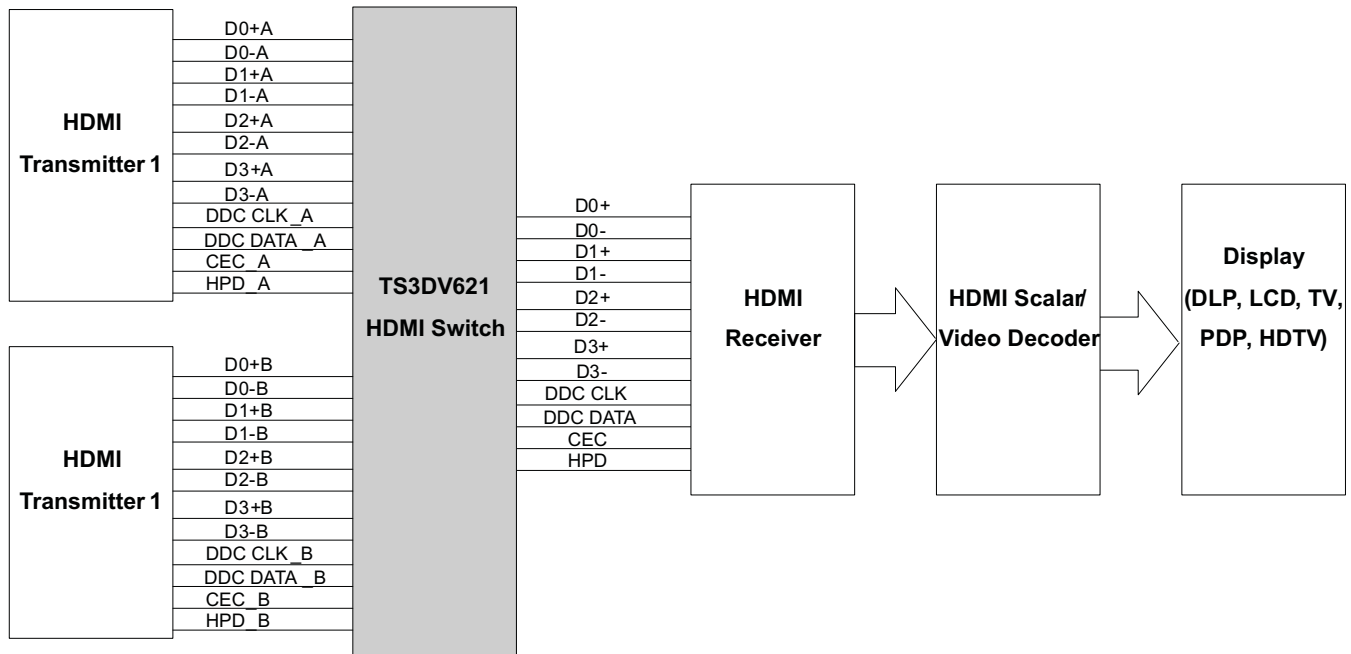


Figure 2. Dual HDMI Source Application

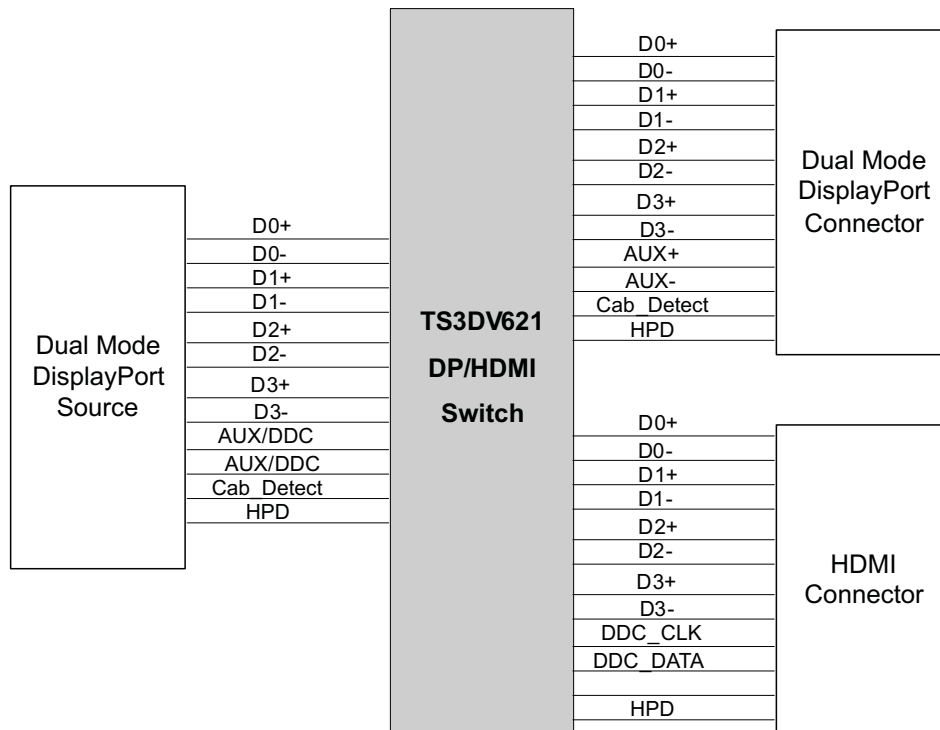


Figure 3. Dual-Mode DisplayPort Application

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V _{CC}	Supply voltage range		-0.5	4.6	V
V _{I/O}	Analog voltage range ⁽²⁾⁽³⁾⁽⁴⁾	All I/O	-0.5	7	V
V _{IN}	Digital input voltage range ⁽²⁾⁽³⁾	SEL1, SEL2	-0.5	7	V
I _{I/OK}	Analog port diode current	V _{I/O} < 0		-50	mA
I _{IK}	Digital input clamp current	V _{IN} < 0		-50	mA
I _{I/O}	On-state switch current ⁽⁵⁾	All I/O	-128	128	mA
I _{DD} I _{GND}	Continuous current through V _{DD} or GND		-100	100	mA
θ _{JA}	Package thermal impedance ⁽⁶⁾	RUA package		31.8	°C/W
T _{stg}	Storage temperature range		-65	150	°C

- (1) Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltages are with respect to ground, unless otherwise specified.
- (3) The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
- (4) V_I and V_O are used to denote specific conditions for V_{I/O}.
- (5) I_I and I_O are used to denote specific conditions for I_{I/O}.
- (6) The package thermal impedance is calculated in accordance with JESD 51-7

RECOMMENDED OPERATING CONDITIONS⁽¹⁾

			MIN	MAX	UNIT
V _{CC}	Supply voltage		3	3.6	V
V _{IH}	High-level control input voltage	SEL1, SEL2	2	5.5	V
V _{IL}	Low-level control input voltage	SEL1, SEL2	0	0.8	V
V _{IN}	Input voltage	SEL1, SEL2	0	5.5	V
V _{I/O}	Input/Output voltage		0	5.5	V
T _A	Operating free-air temperature		-40	85	°C

- (1) All unused control inputs of the device must be held at VDD or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number [SCBA004](#).

TS3DV621

SCDS330C – JANUARY 2012 – REVISED MAY 2013

www.ti.com

ELECTRICAL CHARACTERISTICS

PARAMETER		TEST CONDITIONS ⁽¹⁾		MIN	TYP ⁽²⁾	MAX	UNIT
V _{IK}	Digital input clamp voltage	SEL1,SEL2	V _{CC} = 3.6 V, I _{IN} = -18 mA	-1.2	-0.8		V
R _{ON}	On-state resistance	All I/O	V _{CC} = 3 V, 1.5 V ≤ V _{I/O} ≤ V _{CC} , I _{I/O} = -40 mA		8	12	Ω
R _{ON(flat)} ⁽³⁾	On-state resistance flatness	All I/O	V _{CC} = 3 V, V _{I/O} = 1.5 V and V _{CC} , I _{I/O} = -40mA		1.5		Ω
ΔR _{ON} ⁽⁴⁾	On-state resistance match between channels	All I/O	V _{CC} = 3 V, 1.5 V ≤ V _{I/O} ≤ V _{CC} , I _{I/O} = -40mA		0.4	1	Ω
I _{IH}	Digital input high leakage current	SEL1,SEL2	V _{CC} = 3.6 V, V _{IN} = V _{DD}			±1	μA
I _{IL}	Digital input low leakage current	SEL1,SEL2	V _{CC} = 3.6 V, V _{IN} = GND			±1	μA
I _{OFF}	Leakage under power off conditions	All outputs	V _{CC} = 0 V, V _{I/O} = 0 to 3.6 V, V _{IN} = 0 to 5.5V			±1	μA
C _{IN}	Digital input capacitance	SEL1,SEL2	f = 1 MHz, V _{IN} = 0 V		2.6	3.2	pF
C _{OFF}	Switch OFF capacitance	All I/O	f = 1 MHz, V _{I/O} = 0 V, Output is open, Switch is OFF		2		pF
C _{ON}	Switch ON capacitance	All I/O	f = 1 MHz, V _{I/O} = 0 V, Output is open, Switch is ON		5.6		pF
I _{CC}	VCC supply current		V _{CC} = 3.6 V, I _{I/O} = 0, V _{IN} = V _{DD} or GND		300	400	μA

- (1) V_I, V_O, I_I, and I_O refer to I/O pins, V_{IN} refers to the control inputs
 (2) All typical values are at V_{CC} = 3.3V (unless otherwise noted), T_A = 25°C
 (3) R_{ON(FLAT)} is the difference of R_{ON} in a given channel at specified voltages.
 (4) ΔR_{ON} is the difference of R_{ON} from center port to any other ports.

SWITCHING CHARACTERISTICS

Over recommended operation free-air temperature range, V_{CC} = 3.3 V ± 0.3 V, R_L = 200 Ω, C_L = 4 pF (unless otherwise noted) (see and)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	MIN	TYP ⁽¹⁾	MAX	UNIT
t _{pd} ⁽²⁾	All I/O input side	All I/O output side		40		ps
t _{PZH} , t _{PZL}	SEL1, SEL2	All I/O		2	7	ns
t _{PHZ} , t _{PLZ}	SEL1, SEL2	All I/O		2	5	ns
t _{sk(o)} ⁽³⁾	All I/O input side	All I/O output side		6	30	ps
t _{sk(p)} ⁽⁴⁾				6	30	ps

- (1) All typical values are at V_{CC} = 3.3 V (unless otherwise noted), T_A = 25°C.
 (2) The propagation delay is the calculated RC time constant of the typical ON-State resistance of the switch and the specified load capacitance when driven by an ideal voltage source (zero output impedance).
 (3) Output skew between center port and any other channel.
 (4) Skew between opposite transitions of the same output |t_{PHL} - t_{PLH}|

DYNAMIC CHARACTERISTICS

Over recommended operation free-air temperature range, V_{CC} = 3.3 V ± 0.3 V (unless otherwise noted)

PARAMETER	TEST CONDITIONS	TYP ⁽¹⁾	UNIT
XTALK	R _L = 50 Ω, f = 250 MHz (Figure 11)	-43	dB
OIRR	R _L = 50 Ω, f = 250 MHz (Figure 12)	-42	dB
BW	R _L = 50 Ω, Switch ON (Figure 10)	2.2	GHz

- (1) All typical values are at V_{CC} = 3.3 V (unless otherwise noted), T_A = 25°C.

OPERATING CHARACTERISTICS

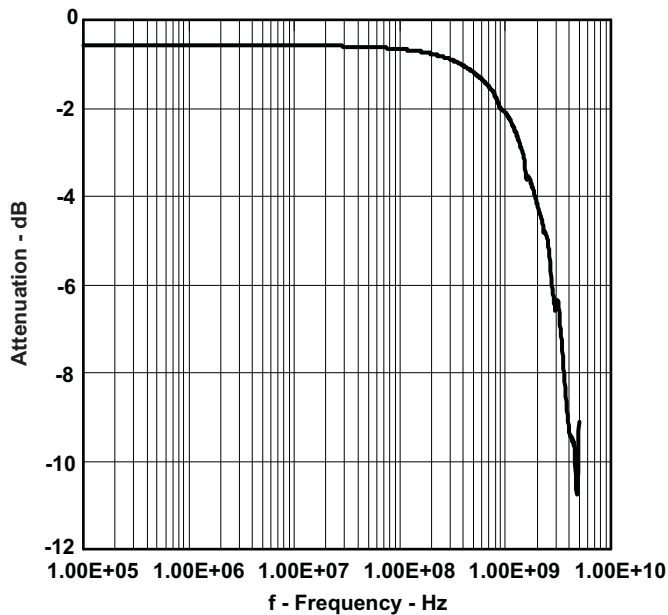


Figure 4. Gain vs Frequency

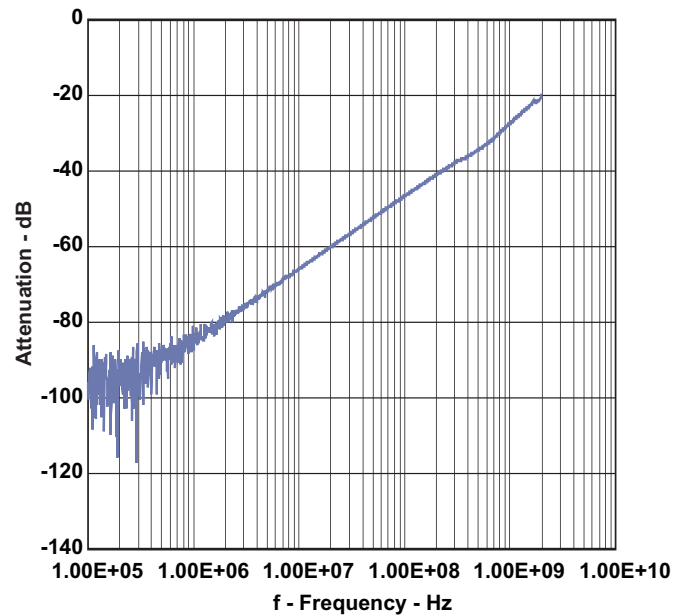


Figure 5. Off Isolation vs Frequency

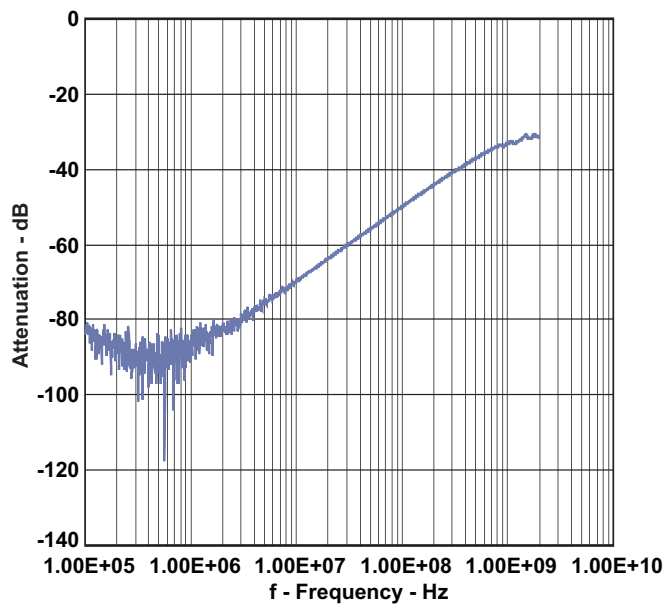


Figure 6. Crosstalk vs Frequency


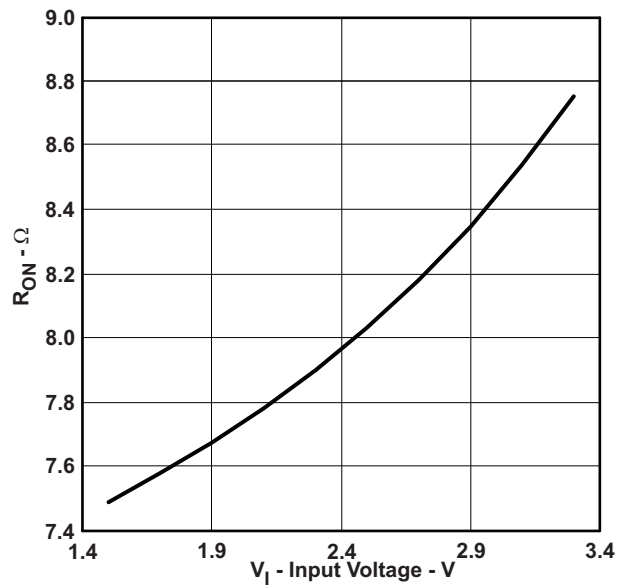



Figure 7. R_{ON} vs V_{IN}

PARAMETER MEASUREMENT INFORMATION

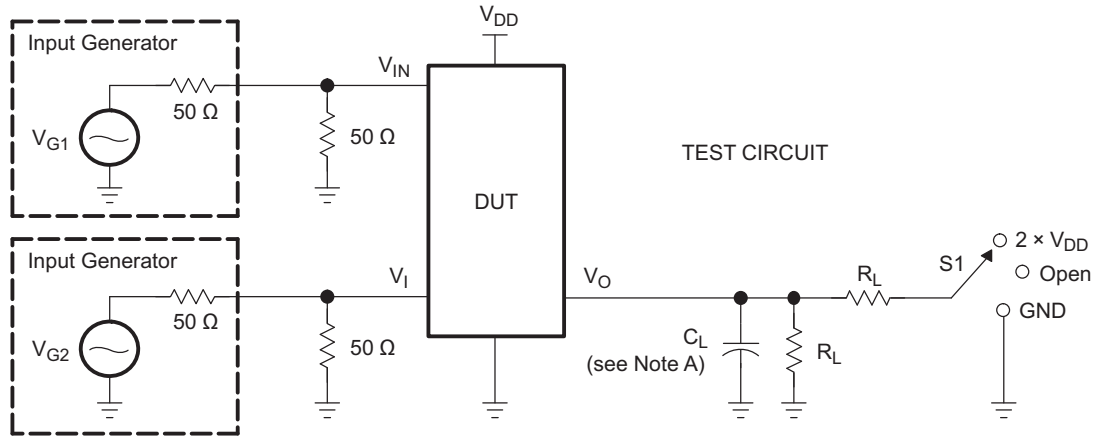Enable and Disable Times



TEST	V _{DD}	S1	R _L	V _{in}	C _L	V _Δ
t _{PLZ} /t _{PZL}	3.3 V ± 0.3 V	2 × V _{DD}	200 Ω	GND	4 pF	0.3 V
t _{PHZ} /t _{PZH}	3.3 V ± 0.3 V	GND	200 Ω	V _{DD}	4 pF	0.3 V

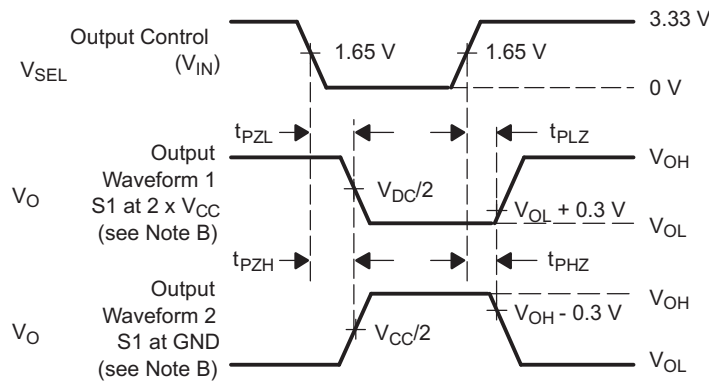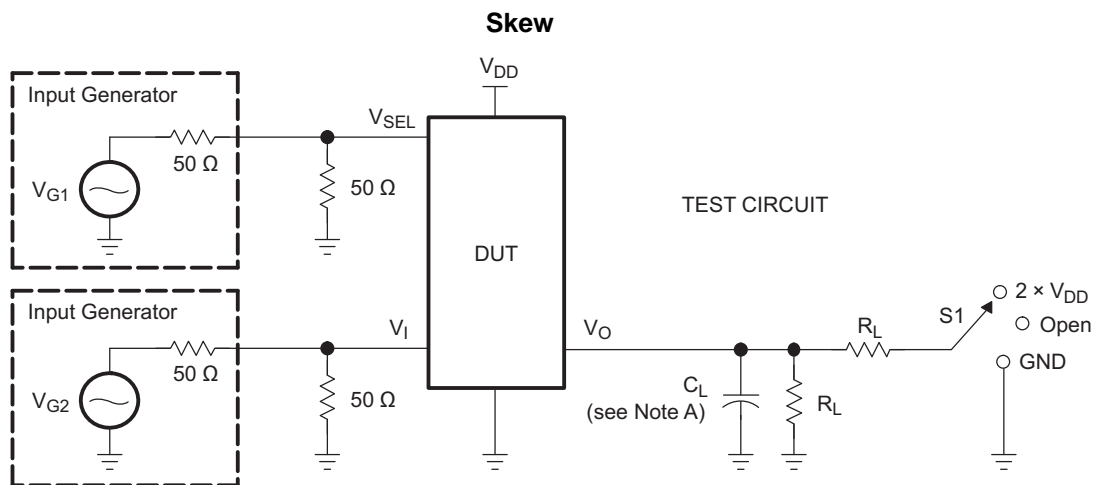


VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES


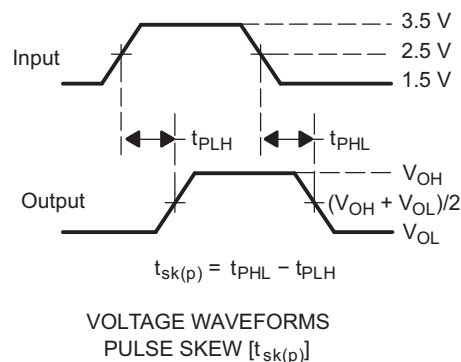
- NOTES:
- A. C_L includes probe and jig capacitance.
 - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
 - C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r ≤ 2.5 ns, t_f ≤ 2.5 ns.
 - D. The outputs are measured one at a time, with one transition per measurement.
 - E. t_{PLZ} and t_{PHZ} are the same as t_{dis}.
 - F. t_{PZL} and t_{PZH} are the same as t_{en}.

Figure 8. Test Circuit and Voltage Waveforms

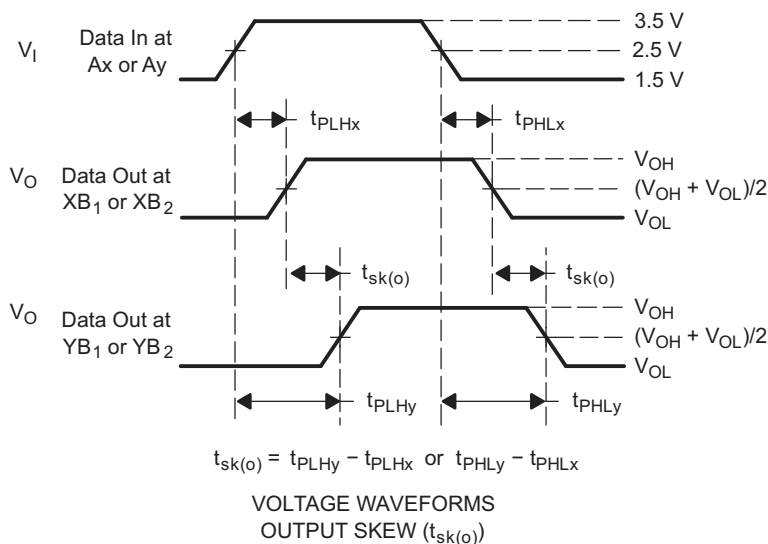PARAMETER MEASUREMENT INFORMATION (continued)




TEST	V _{CC}	S1	R _L	V _{in}	C _L
t _{sk(o)}	3.3 V ± 0.3 V	Open	200 Ω	V _{CC} or GND	4 pF
t _{sk(p)}	3.3 V ± 0.3 V	Open	200 Ω	V _{CC} or GND	4 pF



- NOTES: A. C_L includes probe and jig capacitance.
 B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
 C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r ≤ 2.5 ns, t_f ≤ 2.5 ns.
 D. The outputs are measured one at a time, with one transition per measurement.

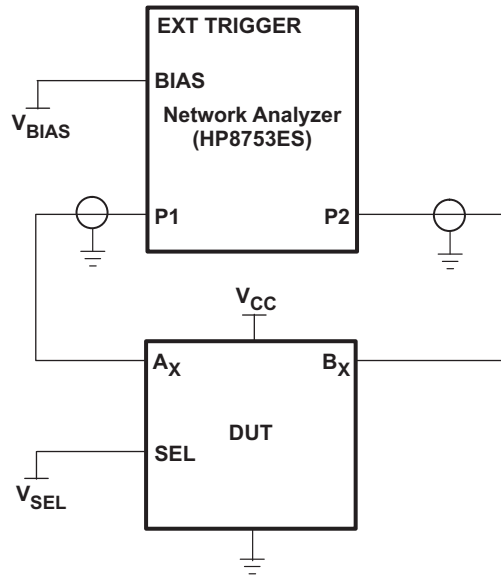Figure 9. Test Circuit and Voltage Waveforms

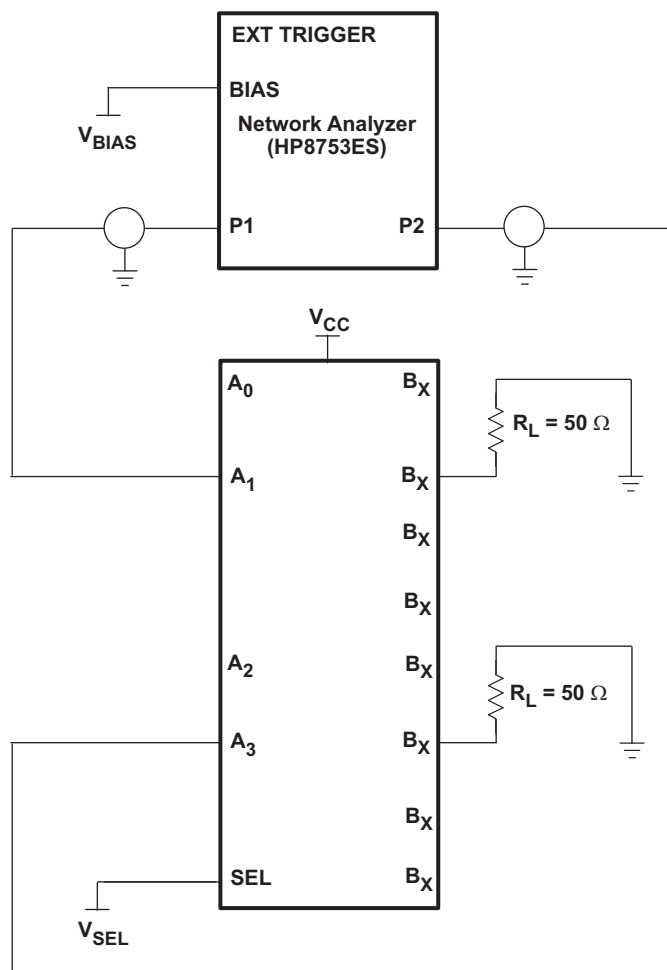
PARAMETER MEASUREMENT INFORMATION (continued)

Figure 10. Test Circuit for Frequency Response (BW)

Frequency response is measured at the output of the ON channel. For example, when $V_{SEL} = 0$ and A_0 is the input, the output is measured at B_0 . All unused analog I/O ports are left open.

HP8753ES Setup

Average = 4
 RBW = 3 kHz
 $V_{BIAS} = 0.35$ V
 ST = 2 s
 P1 = 0 dBm

PARAMETER MEASUREMENT INFORMATION (continued)



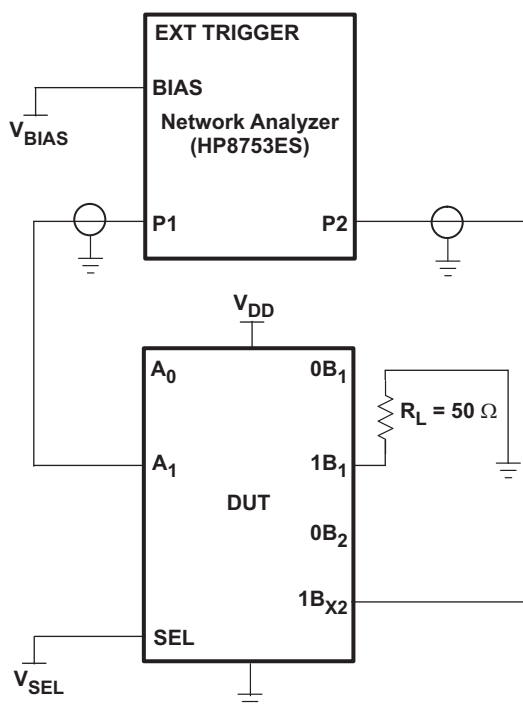
- A. C_L includes probe and jig capacitance.
- B. A 50 W termination resistor is needed to match the loading of the network analyzer.

Figure 11. Test Circuit for Crosstalk (X_{TALK})

Crosstalk is measured at the output of the nonadjacent ON channel. For example, when $V_{SEL} = 0$ and A_1 is the input, the output is measured at A_3 . All unused analog input (A) ports are connected to GND, and output (B) ports are left open.

HP8753ES Setup

- Average = 4
- RBW = 3 kHz
- $V_{BIAS} = 0.35 V$
- ST = 2 s
- P1 = 0 dBm

PARAMETER MEASUREMENT INFORMATION (continued)


A. C_L includes probe and jig capacitance.

B. A 50 W termination resistor is needed to match the loading of the network analyzer.

Figure 12. Test Circuit for OFF Isolation (O_{IRR})

OFF isolation is measured at the output of the OFF channel. For example, when $V_{SEL} = GND$ and A_1 is the input, the output is measured at $1B_2$. All unused analog input (A) ports are connected to ground, and output (B) ports are left open.

HP8753ES Setup

Average = 4

RBW = 3 kHz

$V_{BIAS} = 0.35$ V

ST = 2 s

P1 = 0 dBm

REVISION HISTORY

Changes from Original (January 2012) to Revision A Page

- Changed C_{ON} value in FEATURES from 5.6 pF to 4 pF. 1
 - Deleted LEVEL-SHIFTING REQUIREMENT FOR DUAL-MODE DP/HDMI APPLICATION section from document. 4
 - Added C_{ON} TYP value to the ELECTRICAL CHARACTERISTICS table. 6
-

Changes from Revision A (February 2012) to Revision B Page

- Changed C_{ON} value from 4 pF to 5.6 pF. 1
 - Changed C_{ON} TYP value to the ELECTRICAL CHARACTERISTICS table. 6
-

Changes from Revision B (May 2012) to Revision C Page

- Updated APPLICATIONS. 1
-

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TS3DV621RUAR	ACTIVE	WQFN	RUA	42	3000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	SD621	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TS3DV621RUAR	WQFN	RUA	42	3000	330.0	16.4	3.8	9.3	1.0	8.0	16.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TS3DV621RUAR	WQFN	RUA	42	3000	358.0	335.0	35.0

GENERIC PACKAGE VIEW


RUA 42

WQFN - 0.8 mm max height

9 x 3.5, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

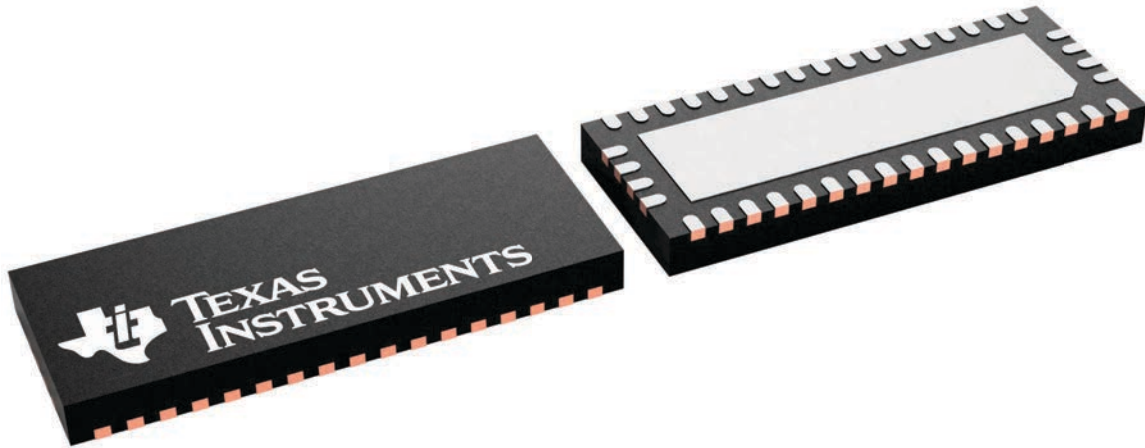

4226504/A


RUA0042A



PACKAGE OUTLINE

WQFN - 0.8 mm max height

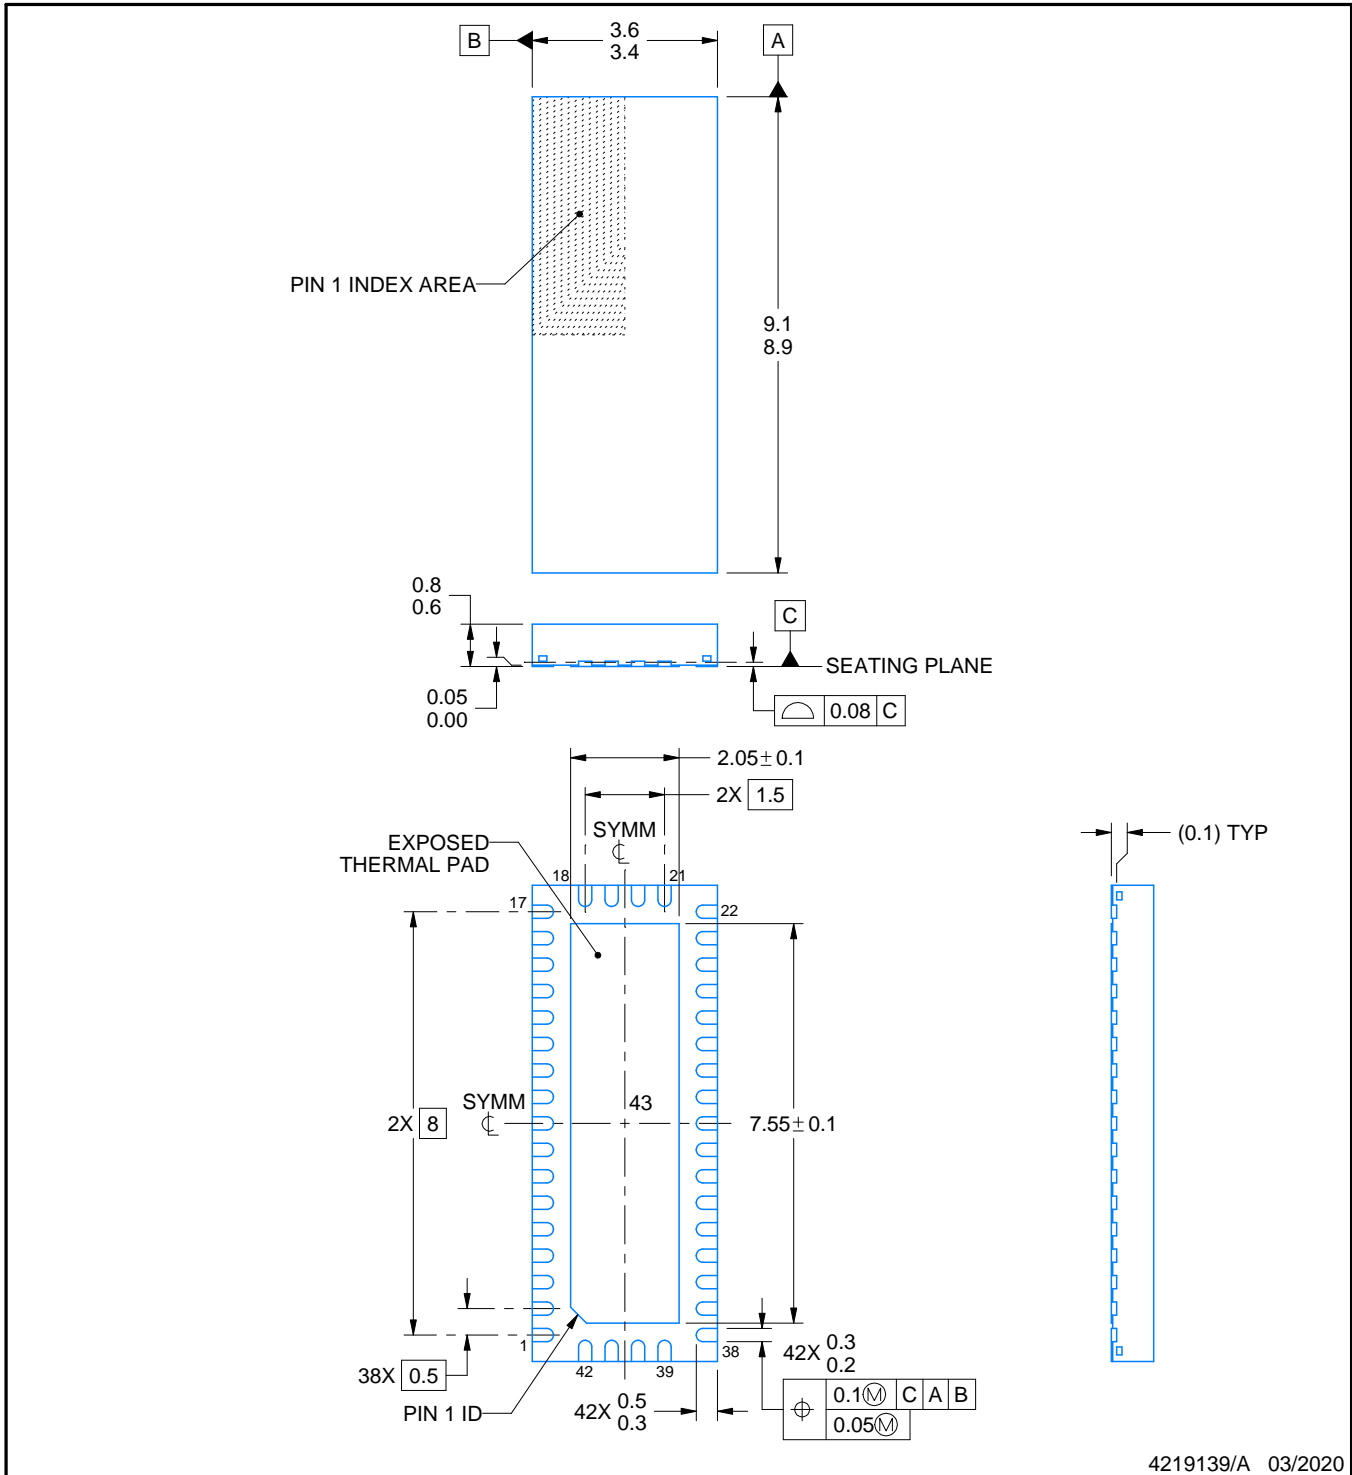PLASTIC QUAD FLATPACK - NO LEAD



4219139/A 03/2020

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

EXAMPLE BOARD LAYOUT


RUA0042A

WQFN - 0.8 mm max height

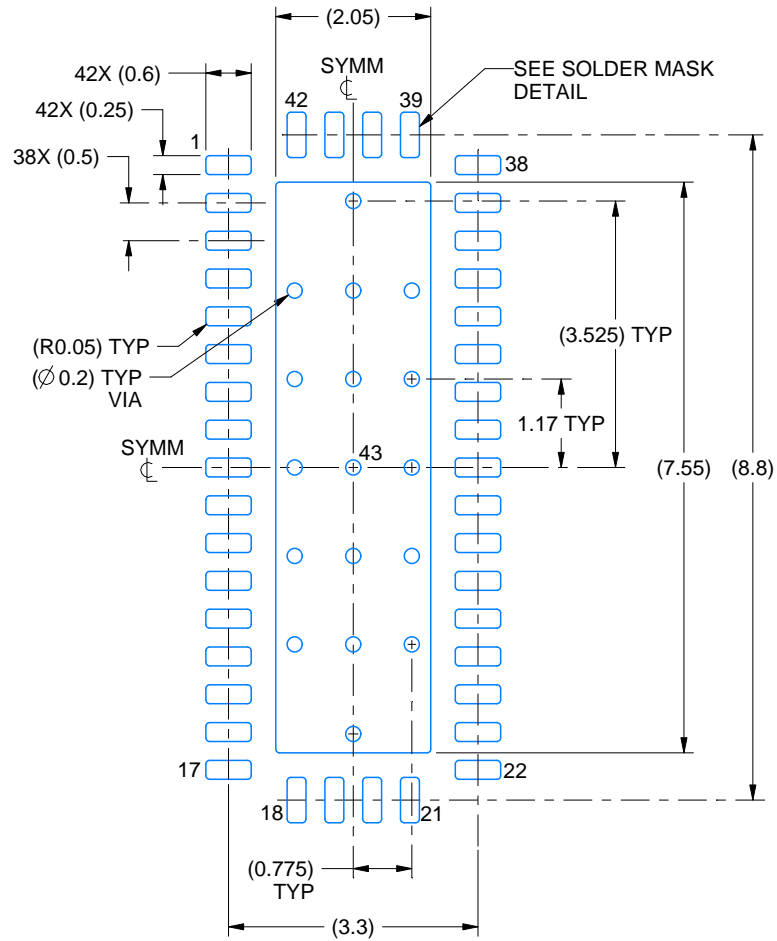PLASTIC QUAD FLATPACK - NO LEAD



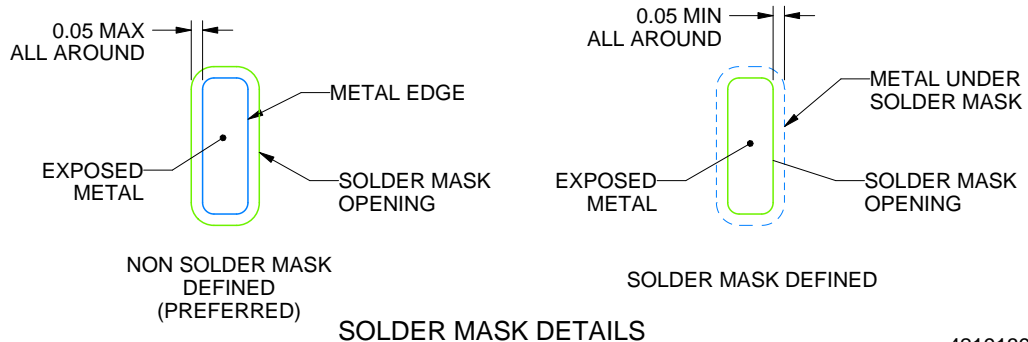LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X



SOLDER MASK DETAILS

4219139/A 03/2020

NOTES: (continued)


- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

RUA0042A

WQFN - 0.8 mm max height

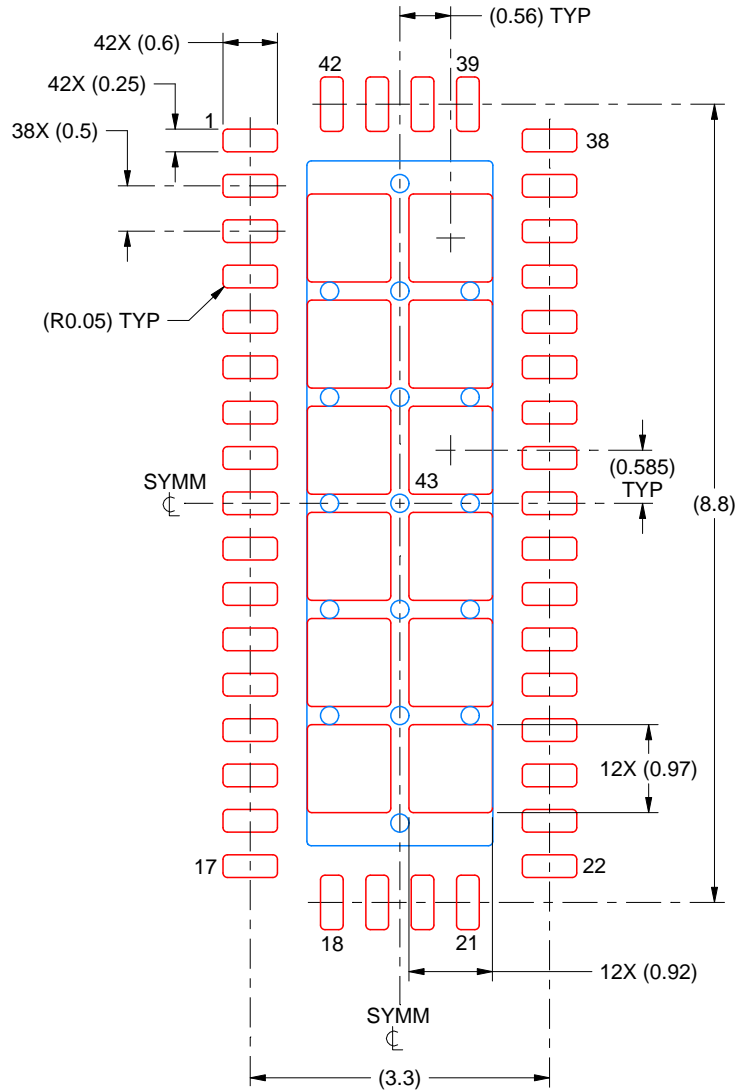PLASTIC QUAD FLATPACK - NO LEAD



SOLDER PASTE EXAMPLE
 BASED ON 0.125 MM THICK STENCIL
 SCALE: 12X

EXPOSED PAD 43
 69% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE

4219139/A 03/2020

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2021, Texas Instruments Incorporated

单击下面可查看定价，库存，交付和生命周期等信息

[>>TI\(德州仪器\)](#)