


Features


- Output Current up to 1A
- Output Voltages of 5, 6, 8, 9, 12, 15, 18, 24V
- Thermal Overload Protection Short Circuit Protection
- Output Transistor Safe Operating area (SOA)Protection

Description

The 78MXX three-terminal positive regulators are available in the TO-252 package with several fixed output voltages making it useful in a wide range of applications.

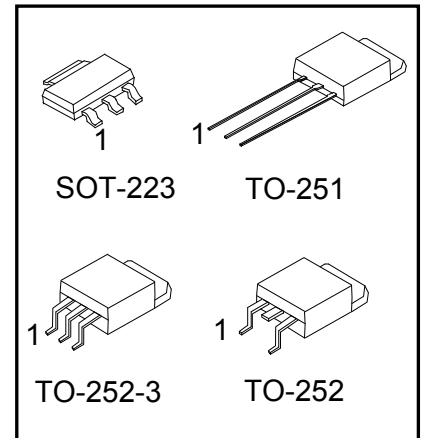

Internal Block Diagram

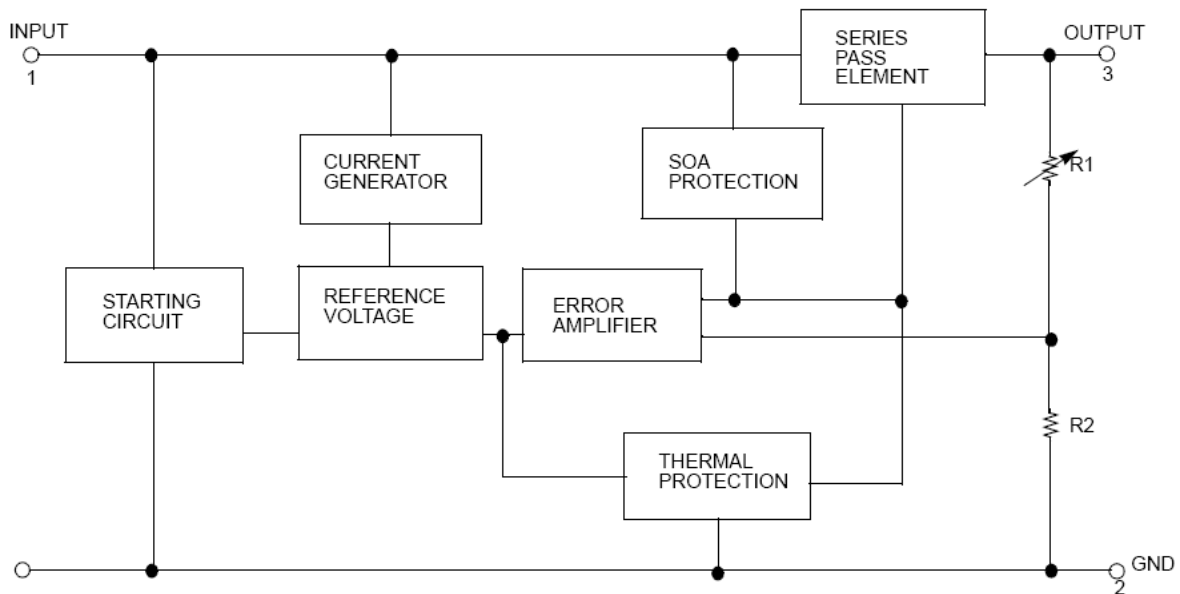

Absolute Maximum Ratings

| PARAMETER | SYMBOL | RATINGS | UNIT |
|--|---------------|------------|------|
| Input Voltage | V_{IN} | 35 | V |
| Output Current | I_{OUT} | 1 | A |
| Power Dissipation ($T_C=25^\circ\text{C}$) | SOT-223 | 8.3 | W |
| | TO-251/TO-252 | 10 | |
| | TO-252-3 | | |
| Operating Junction Temperature | T_J | -40 ~ 120 | |
| Storage Temperature | T_{STG} | -55 ~ +150 | |

Thermal Data

| PARAMETER | | SYMBOL | RATINGS | UNIT |
|------------------|---------------|---------------|---------|------|
| Junction to Case | SOT-223 | θ_{JC} | 15 | °C/W |
| | TO-251/TO-252 | | 12.5 | |
| | TO-252-3 | | | |
| | | | | |

Electrical Characteristics (78M05)

(Refer to the test circuits, $0 < T_J < +125^\circ\text{C}$, $I_O=350\text{mA}$, $V_I=10\text{V}$, unless otherwise specified, $C_I = 0.33\mu\text{F}$, $C_O=0.1\mu\text{F}$)

| Parameter | Symbol | Conditions | Value | | | Unit |
|--------------------------|-----------------------|---|--------------------------------------|------|------|---------------|
| | | | Min | Typ | Max | |
| Output Voltage | V_O | $I_O = 5\text{mA} \sim 350\text{mA}$ $V_I = 7 \sim 20\text{V}$ | 4.75 | 5 | 5.25 | V |
| Line Regulation(Note) | ΔV_O | $I_O = 200\text{mA}$ $T_j = 25^\circ\text{C}$ | $V_I = 7\text{V} \sim 25\text{V}$ | | 100 | mV |
| | | | $V_I = 8\text{V} \sim 25\text{V}$ | | 50 | |
| Load Regulation(Note) | ΔV_O | $T_j = 25^\circ\text{C}$ | $I_O = 5\text{mA} \sim 500\text{mA}$ | | 100 | mV |
| | | | $I_O = 5\text{mA} \sim 200\text{mA}$ | | 50 | |
| Quiescent Current | I_Q | $T_j = 25^\circ\text{C}$ | | | 8.0 | mA |
| Quiescent Current Change | ΔI_Q | $I_O = 5\text{mA} \sim 350\text{mA}$ | | | 0.5 | mA |
| | | $I_O = 200\text{mA}$, $V_I = 8 \sim 25\text{V}$ | | | 0.8 | |
| Output Voltage Drift | $\Delta V / \Delta T$ | $I_O = 5\text{mA}$, $T_j = 0 \sim 125^\circ\text{C}$ | | -0.5 | | mV/°C |
| Output Noise Voltage | V_N | $f = 10\text{Hz} \sim 100\text{KHz}$ | | 40 | | μV |
| Ripple Rejection | RR | $f = 120\text{Hz}$, $V_I = 8 \sim 18\text{V}$ | | 80 | | dB |
| Dropout Voltage | V_D | $T_j = 25^\circ\text{C}$, $I_O = 500\text{mA}$ | | 2 | | V |
| Short Circuit Current | I_{SC} | $T_j = 25^\circ\text{C}$, $V_I = 35\text{V}$ | | 800 | | mA |
| Peak Current | I_{PK} | $T_j = 25^\circ\text{C}$ | | 900 | | mA |

Notes:

Load and line regulation are specified at constant junction temperature. Change in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Electrical Characteristics (78M06)

(Refer to the test circuits, $0 < T_j < +125^\circ\text{C}$, $I_o=350\text{mA}$, $V_i=11\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$)

| Parameter | Symbol | Conditions | Value | | | Unit |
|--------------------------|-----------------------|---|--------------------------------------|------|-----|---------------|
| | | | Min | Typ | Max | |
| Output Voltage | V_o | $I_o = 5\text{mA} \sim 350\text{mA}$ $V_i = 8 \sim 21\text{V}$ | 5.7 | 6 | 6.3 | V |
| Line Regulation(Note) | ΔV_o | $I_o = 200\text{mA}$ $T_j = 25^\circ\text{C}$ | $V_i = 8\text{V} \sim 25\text{V}$ | | 100 | mV |
| | | | $V_i = 9\text{V} \sim 25\text{V}$ | | 50 | |
| Load Regulation(Note) | ΔV_o | $T_j = 25^\circ\text{C}$ | $I_o = 5\text{mA} \sim 500\text{mA}$ | | 120 | mV |
| | | | $I_o = 5\text{mA} \sim 200\text{mA}$ | | 60 | |
| Quiescent Current | I_Q | $T_j = 25^\circ\text{C}$ | | | 8.0 | mA |
| Quiescent Current Change | ΔI_Q | $I_o = 5\text{mA} \sim 350\text{mA}$ | | | 0.5 | mA |
| | | $I_o = 200\text{mA}$, $V_i = 9 \sim 25\text{V}$ | | | 0.8 | |
| Output Voltage Drift | $\Delta V / \Delta T$ | $I_o = 5\text{mA}$, $T_j = 0 \sim 125^\circ\text{C}$ | | -0.5 | | mV/°C |
| Output Noise Voltage | V_N | $f = 10\text{Hz} \sim 100\text{KHz}$ | | 45 | | μV |
| Ripple Rejection | RR | $f = 120\text{Hz}$, $V_i = 9 \sim 19\text{V}$ | | 80 | | dB |
| Dropout Voltage | V_D | $T_j = 25^\circ\text{C}$, $I_o = 500\text{mA}$ | | 2 | | V |
| Short Circuit Current | I_{SC} | $T_j = 25^\circ\text{C}$, $V_i = 35\text{V}$ | | 800 | | mA |
| Peak Current | I_{PK} | $T_j = 25^\circ\text{C}$ | | 900 | | mA |

Notes:

Load and line regulation are specified at constant junction temperature. Change in V_o due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Electrical Characteristics (78M08)

(Refer to the test circuits, $0 < T_j < +125^{\circ}\text{C}$, $I_o=350\text{mA}$, $V_i=14\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$)

| Parameter | Symbol | Conditions | Value | | | Unit |
|--------------------------|-----------------------|--|--------------------------------------|------|-----|------------------------|
| | | | Min | Typ | Max | |
| Output Voltage | V_o | $I_o = 5\text{mA} \sim 350\text{mA}$ $V_i = 10.5 \sim 23\text{V}$ | 7.6 | 8 | 8.4 | V |
| Line Regulation(Note) | ΔV_o | $I_o = 200\text{mA}$ $T_j = 25^{\circ}\text{C}$ | $V_i = 10.5\text{V} \sim 25\text{V}$ | | 100 | mV |
| | | | $V_i = 11\text{V} \sim 25\text{V}$ | | 50 | |
| Load Regulation(Note) | ΔV_o | $T_j = 25^{\circ}\text{C}$ | $I_o = 5\text{mA} \sim 500\text{mA}$ | | 160 | mV |
| | | | $I_o = 5\text{mA} \sim 200\text{mA}$ | | 80 | |
| Quiescent Current | I_q | $T_j = 25^{\circ}\text{C}$ | | | 8.0 | mA |
| Quiescent Current Change | ΔI_q | $I_o = 5\text{mA} \sim 350\text{mA}$ | | | 0.5 | mA |
| | | $I_o = 200\text{mA}$, $V_i = 10.5 \sim 25\text{V}$ | | | 0.8 | |
| Output Voltage Drift | $\Delta V / \Delta T$ | $I_o = 5\text{mA}$, $T_j = 0 \sim 125^{\circ}\text{C}$ | | -0.8 | | mV/ $^{\circ}\text{C}$ |
| Output Noise Voltage | V_N | $f = 10\text{Hz} \sim 100\text{KHz}$ | | 52 | | μV |
| Ripple Rejection | RR | $f = 120\text{Hz}$, $V_i = 11.5 \sim 21.5\text{V}$ | | 80 | | dB |
| Dropout Voltage | V_D | $T_j = 25^{\circ}\text{C}$, $I_o = 500\text{mA}$ | | 2 | | V |
| Short Circuit Current | I_{SC} | $T_j = 25$, $V_i = 35\text{V}$ | | 800 | | mA |
| Peak Current | I_{PK} | $T_j = 25^{\circ}\text{C}$ | | 900 | | mA |

Notes:

Load and line regulation are specified at constant junction temperature. Change in V_o due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Electrical Characteristics (78M09)

(Refer to the test circuits, $0 < T_j < +125^{\circ}\text{C}$, $I_o=350\text{mA}$, $V_i=15\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$)

| Parameter | Symbol | Conditions | Value | | | Unit |
|--------------------------|-----------------------|--|--------------------------------------|------|------|------------------------|
| | | | Min | Typ | Max | |
| Output Voltage | V_o | $I_o = 5\text{mA} \sim 350\text{mA}$ $V_i = 11.5 \sim 24\text{V}$ | 8.45 | 9 | 9.55 | V |
| Line Regulation(Note) | ΔV_o | $I_o = 200\text{mA}$ $T_j = 25^{\circ}\text{C}$ | $V_i = 11.5\text{V} \sim 25\text{V}$ | | 100 | mV |
| | | | $V_i = 12\text{V} \sim 25\text{V}$ | | 50 | |
| Load Regulation(Note) | ΔV_o | $T_j = 25^{\circ}\text{C}$ | $I_o = 5\text{mA} \sim 500\text{mA}$ | | 180 | mV |
| | | | $I_o = 5\text{mA} \sim 200\text{mA}$ | | 90 | |
| Quiescent Current | I_q | $T_j = 25^{\circ}\text{C}$ | | | 8.0 | mA |
| Quiescent Current Change | ΔI_q | $I_o = 5\text{mA} \sim 350\text{mA}$ | | | 0.5 | mA |
| | | $I_o = 200\text{mA}$, $V_i = 11.5 \sim 25\text{V}$ | | | 0.8 | |
| Output Voltage Drift | $\Delta V / \Delta T$ | $I_o = 5\text{mA}$, $T_j = 0 \sim 125^{\circ}\text{C}$ | | -0.8 | | mV/ $^{\circ}\text{C}$ |
| Output Noise Voltage | V_N | $f = 10\text{Hz} \sim 100\text{KHz}$ | | 52 | | μV |
| Ripple Rejection | RR | $f = 120\text{Hz}$, $V_i = 12.5 \sim 22.5\text{V}$ | | 80 | | dB |
| Dropout Voltage | V_D | $T_j = 25^{\circ}\text{C}$, $I_o = 500\text{mA}$ | | 2 | | V |
| Short Circuit Current | I_{SC} | $T_j = 25^{\circ}\text{C}$, $V_i = 35\text{V}$ | | 800 | | mA |
| Peak Current | I_{PK} | $T_j = 25^{\circ}\text{C}$ | | 900 | | mA |

Notes:

Load and line regulation are specified at constant junction temperature. Change in V_o due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Electrical Characteristics (78M12)

(Refer to the test circuits, $0 < T_j < +125^\circ\text{C}$, $I_o=350\text{mA}$, $V_i=19\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$)

| Parameter | Symbol | Conditions | Value | | | Unit |
|--------------------------|-----------------------|--|--------------------------------------|------|------|----------------------|
| | | | Min | Typ | Max | |
| Output Voltage | V_o | $I_o = 5\text{mA} \sim 350\text{mA}$ $V_i = 14.5 \sim 27\text{V}$ | 11.4 | 12 | 12.6 | V |
| Line Regulation(Note) | ΔV_o | $I_o = 200\text{mA}$ $T_j = 25^\circ\text{C}$ | $V_i = 14.5\text{V} \sim 30\text{V}$ | | 100 | mV |
| | | | $V_i = 16\text{V} \sim 30\text{V}$ | | 50 | |
| Load Regulation(Note) | ΔV_o | $T_j = 25^\circ\text{C}$ | $I_o = 5\text{mA} \sim 500\text{mA}$ | | 240 | mV |
| | | | $I_o = 5\text{mA} \sim 200\text{mA}$ | | 120 | |
| Quiescent Current | I_Q | $T_j = 25^\circ\text{C}$ | | | 8.0 | mA |
| Quiescent Current Change | ΔI_Q | $I_o=5\text{mA} \sim 350\text{mA}$ | | | 0.5 | mA |
| | | $I_o = 200\text{mA}$, $V_i = 14.5 \sim 30\text{V}$ | | | 0.8 | |
| Output Voltage Drift | $\Delta V / \Delta T$ | $I_o = 5\text{mA}$, $T_j = 0 \sim 125^\circ\text{C}$ | | -0.8 | | mV/ $^\circ\text{C}$ |
| Output Noise Voltage | V_N | $f = 10\text{Hz} \sim 100\text{KHz}$ | | 75 | | μV |
| Ripple Rejection | RR | $f = 120\text{Hz}$, $V_i = 15 \sim 25\text{V}$ | | 80 | | dB |
| Dropout Voltage | V_D | $T_j = 25^\circ\text{C}$, $I_o = 500\text{mA}$ | | 2 | | V |
| Short Circuit Current | I_{SC} | $T_j = 25^\circ\text{C}$, $V_i = 35\text{V}$ | | 800 | | mA |
| Peak Current | I_{PK} | $T_j = 25^\circ\text{C}$ | | 900 | | mA |

Notes:

Load and line regulation are specified at constant junction temperature. Change in V_o due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Electrical Characteristics (78M15)

(Refer to the test circuits, $0 < T_j < +125^{\circ}\text{C}$, $I_o=350\text{mA}$, $V_i=23\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$)

| Parameter | Symbol | Conditions | Value | | | Unit |
|--------------------------|-----------------------|--|--------------------------------------|------|-------|------------------------|
| | | | Min | Typ | Max | |
| Output Voltage | V_o | $I_o = 5\text{mA} \sim 350\text{mA}$ $V_i = 17.5 \sim 30\text{V}$ | 14.25 | 15 | 15.75 | V |
| Line Regulation(Note) | ΔV_o | $I_o = 200\text{mA}$ $T_j = 25^{\circ}\text{C}$ | $V_i = 17.5\text{V} \sim 30\text{V}$ | | 100 | mV |
| | | | $V_i = 20\text{V} \sim 30\text{V}$ | | 50 | |
| Load Regulation(Note) | ΔV_o | $T_j = 25^{\circ}\text{C}$ | $I_o = 5\text{mA} \sim 500\text{mA}$ | | 300 | mV |
| | | | $I_o = 5\text{mA} \sim 200\text{mA}$ | | 150 | |
| Quiescent Current | I_q | $T_j = 25^{\circ}\text{C}$ | | | 8.0 | mA |
| Quiescent Current Change | ΔI_q | $I_o = 5\text{mA} \sim 350\text{mA}$ | | | 0.5 | mA |
| | | $I_o = 200\text{mA}$, $V_i = 17.5 \sim 30\text{V}$ | | | 0.8 | |
| Output Voltage Drift | $\Delta V / \Delta T$ | $I_o = 5\text{mA}$, $T_j = 0 \sim 125^{\circ}\text{C}$ | | -1.0 | | mV/ $^{\circ}\text{C}$ |
| Output Noise Voltage | V_N | $f = 10\text{Hz} \sim 100\text{KHz}$ | | 100 | | μV |
| Ripple Rejection | RR | $f = 120\text{Hz}$, $V_i = 18.5 \sim 28.5\text{V}$ | | 70 | | dB |
| Dropout Voltage | V_D | $T_j = 25^{\circ}\text{C}$, $I_o = 500\text{mA}$ | | 2 | | V |
| Short Circuit Current | I_{SC} | $T_j = 25^{\circ}\text{C}$, $V_i = 35\text{V}$ | | 800 | | mA |
| Peak Current | I_{PK} | $T_j = 25^{\circ}\text{C}$ | | 900 | | mA |

Notes:

Load and line regulation are specified at constant junction temperature. Change in V_o due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Electrical Characteristics (78M18)

(Refer to the test circuits, $0 < T_j < +125^\circ\text{C}$, $I_o=350\text{mA}$, $V_i=26\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$)

| Parameter | Symbol | Conditions | Value | | | Unit |
|--------------------------|-----------------------|--|--------------------------------------|------|------|---------------|
| | | | Min | Typ | Max | |
| Output Voltage | V_o | $I_o = 5\text{mA} \sim 350\text{mA}$ $V_i = 20.5 \sim 33\text{V}$ | 17.1 | 18 | 18.9 | V |
| Line Regulation(Note) | ΔV_o | $I_o = 200\text{mA}$ $T_j = 25^\circ\text{C}$ | $V_i = 21\text{V} \sim 33\text{V}$ | | 100 | mV |
| | | | $V_i = 24\text{V} \sim 33\text{V}$ | | 50 | |
| Load Regulation(Note) | ΔV_o | $T_j = 25^\circ\text{C}$ | $I_o = 5\text{mA} \sim 500\text{mA}$ | | 360 | mV |
| | | | $I_o = 5\text{mA} \sim 200\text{mA}$ | | 180 | |
| Quiescent Current | I_q | $T_j = 25^\circ\text{C}$ | | | 8.0 | mA |
| Quiescent Current Change | ΔI_q | $I_o = 5\text{mA} \sim 350\text{mA}$ | | | 0.5 | mA |
| | | $I_o = 200\text{mA}$, $V_i = 21 \sim 33\text{V}$ | | | 0.8 | |
| Output Voltage Drift | $\Delta V / \Delta T$ | $I_o = 5\text{mA}$, $T_j = 0 \sim 125^\circ\text{C}$ | | -1.2 | | mV/°C |
| Output Noise Voltage | V_N | $f = 10\text{Hz} \sim 100\text{KHz}$ | | 100 | | μV |
| Ripple Rejection | RR | $f = 120\text{Hz}$, $V_i = 22 \sim 32\text{V}$ | | 70 | | dB |
| Dropout Voltage | V_D | $T_j = 25^\circ\text{C}$, $I_o = 500\text{mA}$ | | 2 | | V |
| Short Circuit Current | I_{SC} | $T_j = 25^\circ\text{C}$, $V_i = 35\text{V}$ | | 800 | | mA |
| Peak Current | I_{PK} | $T_j = 25^\circ\text{C}$ | | 900 | | mA |

Notes:

Load and line regulation are specified at constant junction temperature. Change in V_o due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Electrical Characteristics (78M24)

(Refer to the test circuits, $0 < T_j < +125^\circ\text{C}$, $I_o=350\text{mA}$, $V_i=33\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$)

| Parameter | Symbol | Conditions | Value | | | Unit |
|--------------------------|-----------------------|--|--------------------------------------|------|------|----------------------|
| | | | Min | Typ | Max | |
| Output Voltage | V_o | $I_o = 5\text{mA} \sim 350\text{mA}$ $V_i = 27 \sim 38\text{V}$ | 22.8 | 24 | 25.2 | V |
| Line Regulation(Note) | ΔV_o | $I_o = 200\text{mA}$ $T_j = 25^\circ\text{C}$ | $V_i = 27\text{V} \sim 38\text{V}$ | | 100 | mV |
| | | | $V_i = 28\text{V} \sim 38\text{V}$ | | 50 | |
| Load Regulation(Note) | ΔV_o | $T_j = 25^\circ\text{C}$ | $I_o = 5\text{mA} \sim 500\text{mA}$ | | 480 | mV |
| | | | $I_o = 5\text{mA} \sim 200\text{mA}$ | | 240 | |
| Quiescent Current | I_q | $T_j = 25^\circ\text{C}$ | | | 8.0 | mA |
| Quiescent Current Change | ΔI_q | $I_o = 5\text{mA} \sim 350\text{mA}$ | | | 0.5 | mA |
| | | $I_o = 200\text{mA}$, $V_i = 27 \sim 38\text{V}$ | | | 0.8 | |
| Output Voltage Drift | $\Delta V / \Delta T$ | $I_o = 5\text{mA}$, $T_j = 0 \sim 125^\circ\text{C}$ | | -1.2 | | mV/ $^\circ\text{C}$ |
| Output Noise Voltage | V_N | $f = 10\text{Hz} \sim 100\text{KHz}$ | | 170 | | μV |
| Ripple Rejection | RR | $f = 120\text{Hz}$, $V_i = 28 \sim 38\text{V}$ | | 70 | | dB |
| Dropout Voltage | V_D | $T_j = 25^\circ\text{C}$, $I_o = 500\text{mA}$ | | 2 | | V |
| Short Circuit Current | I_{SC} | $T_j = 25^\circ\text{C}$, $V_i = 35\text{V}$ | | 800 | | mA |
| Peak Current | I_{PK} | $T_j = 25^\circ\text{C}$ | | 900 | | mA |

Notes:

Load and line regulation are specified at constant junction temperature. Change in V_o due to heating effects must be taken into account separately. Pulse testing with low duty is used.

单击下面可查看定价，库存，交付和生命周期等信息

[>>UDF\(优迪半导体\)](#)