



Automotive 125 °C Analog Switch Dual DPDT / Quad SPDT, 0.37 Ω, 338 MHz Bandwidth

DESCRIPTION

The DGQ2788A, is a four-channel single-pole double-throw (SPDT) analog switch with two control inputs. It is also known as a two-channel double-pole double-throw (DPDT) configuration. The part is designed to operate from 1.8 V to 5.5 V single power rail. All switches conduct equally well in both directions, offering rail to rail signal switching and can be used both as multiplexers as well as de-multiplexers.

The DGQ2788A offers low parasitic capacitance and highly matched low and flat switch resistance over the full signal range. It features break-before-make switching and low control logic threshold. The part supports rail to rail fast edge pulsing signals and have 0.1 ns/typ. propagation delay. It is ideal for both analog and digital signal switching in space constrain applications requiring high performance and efficient use of board space.

The DGQ2788A comes in a small miniQFN-16 lead package of 2.6 mm x 1.8 mm x 0.55 mm.

This product has been qualified to the Automotive Electronics Council (AEC) standard Q100 (Grade 1) and is suitable for use in automotive applications.

FEATURES

- 1.8 V to 5.5 V single supply operation
- Low resistance: 0.37 Ω/typ. at 2.7 V
- Highly flat and matched R_{ON}
- Low parasitic capacitance,
- C_{ON} = 26 pF, C_{OFF} = 14.5 pF
- High bandwidth: 338 MHz
- 0.1 ns/typ. propagation delay for rail to rail fast edge pulsing signal
- Guaranteed logic high 1.2 V, logic low 0.3 V
- · Break before make switching
- Signal swing over V+ capable
- Power down protection
- Latch up current: 300 mA (JESD78)
- · Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


BENEFITS

- Low and flat resistance
- High bandwidth
- Low parasitic capacitance
- Fault protection

APPLICATIONS

- Automotive infotainment
- · Audio, video, and bus routing
- Industrial automation
- Medical imaging
- Network and telecommunication

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION



	<u>3</u> xx				
Pin 1 →					
Device	marking: 3xx				

xx = date / lot traceability code Note: pin 1 has long lead

TRUTH TABLE					
LOGIC	NC1, 2, 3 and 4	NO1, 2, 3 and 4			
0	On	Off			
1	Off	On			

ORDERING INFORMAT	ON		
TEMPERATURE RANGE	PACKAGE	PART NUMBER	MIN. ORDER / PACK. QUANTITY
-40 °C to +125 °C lead (Pb)-free	miniQFN-16	DGQ2788AEN-T1-GE4	Tape and reel, 3000 units

S19-0381-Rev. C, 29-Apr-2019

Document Number: 75683

RoHS COMPLIANT HALOGEN FREE



1



Vishay Siliconix

ABSOLUTE MAXIMUM RATI	NGS (T _A = 25 °C, unless	otherwise noted	d)	
PARAMETER		SYMBOL	LIMIT	UNIT
Reference to GND	V+		-0.3 to +6	V
Reference to GND	IN, COM, NC, NO ^a		-0.3 to (V+ + 0.3)	v
Current (any terminal except NO, NC, or	COM)		30	
Continuous current (NO, NC, or COM)			± 300	mA
Peak current (pulsed at 1 ms, 10 % duty cycle)			± 500	
Storage temperature (D suffix)			-65 to +150	°C
Package solder reflow conditions ^d	miniQFN-16		250	C
Power dissipation (packages) ^b	miniQFN-16 °		525	mW
Latch-up, per AEC Q100-004			300	mA
ESD human body model, per AEC Q100-002			2000	V
ESD charged device model, per AEC Q100-011			1500	v

Notes

a. Signals on NC, NO, or COM, or IN exceeding V+ will be clamped by internal diodes. Limit forward diode current to maximum current ratings

b. All leads welded or soldered to PC board

c. Derate 6.6 mW/°C above 70 °C

d. Manual soldering with iron is not recommended for leadless components. The miniQFN-16 is a leadless package. The end of the lead terminal is exposed copper (not plated) as a result of the singulation process in manufacturing. A solder fillet at the exposed copper lip cannot be guaranteed and is not required to ensure adequate bottom side solder interconnection



www.vishay.com

Vishay Siliconix

$ \begin{array}{ c c c c } \mbox{Markov} & \mbox{Markov} $	SPECIFICATIONS (V	/+ = 3 V)						
$ \begin{array}{ c c c c } \hline \mbox{We} & $	PARAMETER	SYMBOL		TEMP. ^a				UNIT
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $					MIN. ^b	TYP. °	MAX. ^b	
	Analog Switch							
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	Analog signal range ^d			Full	0	-	V+	V
$ \begin{array}{ c c c c c c } \hline \begin{tabular}{ c c c c c } \hline \begin{tabular}{ c c c c } \hline \begin{tabular}{ c c c c c c c } \hline \begin{tabular}{ c c c c c c c } \hline \begin{tabular}{ c c c c c c c c c c c c c c c c c c c$	On registance	Paul	V+ = 2.7 V, V_{COM} = 0 to 2.7 V, I _{NO} , I _{NC} = 100 mA	Room	-	0.37	0.5	
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	On-resistance	non		Full	-	-	0.65	
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $				Room	-	0.01	0.05	Ω
	R _{ON} match ^d	ΔR_{ON}	$N_{\rm NO}$, $N_{\rm C} = 100$ mA	Room	-	0.05	-	
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $		I _{NO(off)} ,		Room	-0.1	-	0.1	
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	Outline official states and		$V_{+} = 5.5 V, V_{NO}, V_{NC} = 0.5 V / 4 V,$	Full	-0.5	-	0.5	
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	Switch on leakage current		V _{COM} = 4 V / 0.5 V	Room	-1.2	-	1.2	
$\begin{array}{ c c c c c c } \hline \begin{tabular}{ c c c c } \hline \begin{tabular}{ c c c c } \hline \begin{tabular}{ c c c } \hline \begin{tabular}{ c c c c } \hline \begin{tabular}{ c c c } \hline \begin{tabular}{ c c c } \hline \begin{tabular}{ c c c c } \hline \begin{tabular}{ c c c } \hline \begin{tabular}{ c c c c c } \hline \begin{tabular}{ c c c c c c } \hline \begin{tabular}{ c c c c c c } \hline \begin{tabular}{ c c c c c c c c c c c c c c c c c c c$		COM(off)		Full	-2	-	2	μA
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	Channel-on leakage			Room	-1.2	-	1.2	
$ \begin{array}{ c c c c c c c } \hline \begin{tabular}{ c c c c c } \hline \begin{tabular}{ c c c c c c } \hline \begin{tabular}{ c c c c c c } \hline \begin{tabular}{ c c c c c c c c c c c c c c c c c c c$	current	ICOM(on)	$v + = 5.5 v, v_{NO}, v_{NC} = v_{COM} = 0.5 v / 4 v$	Full	-2	-	2	
$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	Digital Control		·					
$\begin{array}{ $	Input high voltage	V _{INH}		Full	1.2	-	-	V
$ \begin{array}{ c c c c c c } \hline Input current & I_{INL} or I_{INH} & V_{IN} = 0 \mbox{ or } V+ & Full & -1 & - & 1 & \mu A \\ \hline \mbox{Dynamic Characteristics} \\ \hline \mbox{Turn-on time} & t_{ON} & & & & & & & & & & & & & & & & & & &$	Input low voltage	V _{INL}		Full	-	-	0.3	v
$\begin{array}{c c c c c c c c } \hline \textbf{Dynamic Characteristics} \\ \hline Turn-on time & t_{ON} & t_{ON} & t_{OFF} & V_{NO} \mbox{ or } V_{NC} = 1.5 \mbox{ V}, R_L = 50 0, C_L = 35 pF & Full & - & - & 150 & Full & - & - & 33 & Full & - & - & - & 33 & Full & - & - & - & 33 & Full & - & - & - & 33 & Full & - & - & - & - & - & - & - & - & - &$	Input capacitance	C _{IN}		Full	-	5	-	pF
$ \begin{array}{c c c c c c c c } \hline \mbox{Turn-on time} & t_{ON} & t_{ON} & t_{OFF} & t_{OFF} & t_{OFF} & t_{O} &$	Input current	I _{INL} or I _{INH}	$V_{IN} = 0 \text{ or } V+$	Full	-1	-	1	μA
$ \begin{array}{ c c c c } \hline Turn-on time & ton & \\ \hline Turn-off time & tor & \\ \hline Turn-off time & tor & \\ \hline Turn-off time & tor & \\ \hline Tor & \\ \hline Tor & \\ \hline Tor & \\ \hline Turn-off time & \\ \hline Tor & \\ \hline Tor & \\ \hline Tor & \\ \hline Tor & \\ \hline Turn-off time & \\ \hline Tor &$	Dynamic Characteristics		•	•		•		
$ \begin{array}{ c c c c c } \hline \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ $	Turn on time			Room	-	30	50	μs
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	Turn-on time	ton		Full	-	-	150	
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	Turne off times		$v_{\rm NO}$ or $v_{\rm NC}$ = 1.5 v, R _L = 50 Ω, C _L = 35 pF	Room	-	0.35	1	
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	i um-off time	tOFF		Full	-	-	3	
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	Break-before-make time	t _d		Full	1	-	-	
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	Charge injection ^d	Q _{INJ}	C_L = 1 nF, V_{GEN} = 1.5 V, R_{GEN} = 0 Ω	Room	-	-245	-	рС
$ \begin{array}{c c c c c c c c c } \hline OIRR & \hline & R_L = 50 \ \Omega, \ C_L = 5 \ pF, \ f = 1 \ MHz & R_L = 50 \ \Omega, \ C_L = 5 \ pF, \ f = 100 \ HZ & Room & \hline & - & -56 & - & \\ \hline & - & -87 & - & \\ \hline & - & -61 & - & \\ \hline & - & -104.1 & - & \\ \hline & - & - & -104.1 & - & \\ \hline & - & - & -104.1 & - & \\ \hline & - & - & -104.1 & - & \\ \hline & - & - & -104.1 & - & \\ \hline & - & - & -104.1 & - & \\ \hline & - & - & -104.1 & - & \\ \hline & - & - & -104.1 & - & \\ \hline & - & - & -104.1 & - & \\ \hline & - & - & -104.1 & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & \\ \hline & - & - & - & - & \\ \hline & - & - & - & \\ \hline & - & - & - & \\ \hline & - & - & - & \\ $	-3 dB bandwidth	BW	$R_{L} = 50 \Omega, C_{L} = 5 pF$	Room	-	338	-	MHz
$ \begin{array}{ c c c c c c } \hline R_L = 50 \ \Omega, \ C_L = 5 \ pF, \ f = 1 \ MHz & R_0 & \hline & & -56 & -6 & -6666 & -666 & -6666 & -666 & -666 & -666 & -666 & $	Off is shall a d		R_L = 50 Ω, C_L = 5 pF, f = 100 kHz		-	-82	-	
$ \begin{array}{c c c c c c c c c } \hline Crosstalk ^{d, f} & & & & & & & & & & & & & & & & & & $	Off-Isolation ^a	OIRR	$R_L = 50 \Omega, C_L = 5 pF, f = 1 MHz$	D	-	-56	-	dB
$ \begin{array}{ c c c c c } \hline R_L = 50 \ \Omega, \ C_L = 5 \ pF, \ f = 1 \ MHz \\ \hline R_L = 50 \ \Omega, \ 1 \ V_{p-p}, \ f = 1 \ HHz \\ \hline Room \\ \hline row \\ $	o u d f		$R_L = 50 \Omega$, $C_L = 5 pF$, f = 100 kHz	Room	-	-87	-	
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	Crosstalk ^{u, 1}	X _{TALK}	$R_L = 50 \Omega$, $C_L = 5 pF$, f = 1 MHz		-	-61	-	
		THD+N	R_L = 50 Ω , 1 V_{p-p} , f = 1 kHz	Room	-	-104.1	-	dB
	NO NO «Kanadiana d	C _{NO(off)}		Room	-	14.5	-	
Channel-on capacitance d C _{NO(on)} T = 1 MHZ Room - 26 - PF Power Supply C _{NC(on)} C </td <td>NO, NO OT capacitance d</td> <td></td> <td></td> <td>Room</td> <td>-</td> <td>14.5</td> <td>-</td> <td rowspan="2">pF</td>	NO, NO OT capacitance d			Room	-	14.5	-	pF
Room - 26 - Power Supply Room - 26 - Power supply range V+ 1.8 - 5.5 V			T = 1 MHZ	Room	-	26	-	
Power Supply Power supply range V+ 1.8 - 5.5 V	Unannel-on capacitance d		1	Room	-	26	-	
	Power Supply		·					
Power supply current $V_{\mu\nu} = 0 \text{ or } V_{\nu}$	Power supply range	V+			1.8	-	5.5	V
i owei suppry current i+ v _{IN} = 0 0 i v+ Full - 24 00 μA	Power supply current	I+	V _{IN} = 0 or V+	Full	-	24	60	μA

Notes

a. Room = 25 °C, full = as determined by the operating suffix

The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet b.

c. Typical values are for design aid only, not guaranteed nor subject to production testing

d. Guarantee by design, not subjected to production test

e. V_{IN} = input voltage to perform proper function

Crosstalk measured between channels f.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


S19-0381-Rev. C, 29-Apr-2019


3 For technical questions, contact: analogswitchtechsupport@vishay.com




Vishay Siliconix

TYPICAL CHARACTERISTICS (T_A = 25 °C, unless otherwise noted)

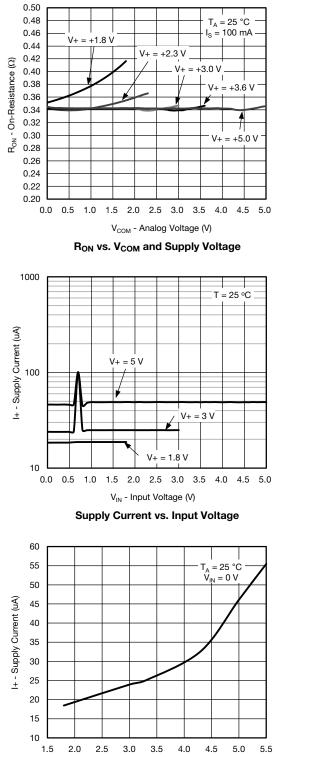



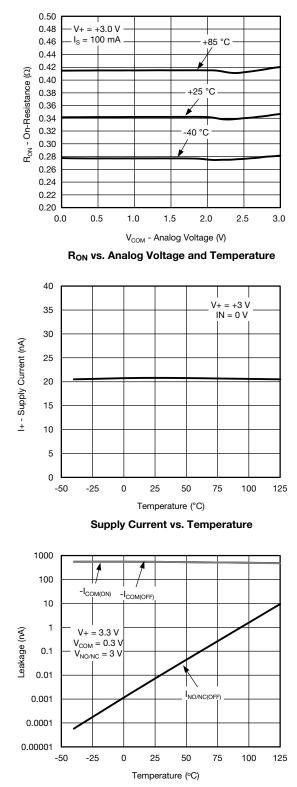


Leakage Current vs. Temperature

S19-0381-Rev. C, 29-Apr-2019

4

Document Number: 75683


For technical questions, contact: analogswitchtechsupport@vishay.com THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFI Downloaded From Oneyac.com






Vishay Siliconix


TYPICAL CHARACTERISTICS ($T_A = 25 \text{ °C}$, unless otherwise noted)

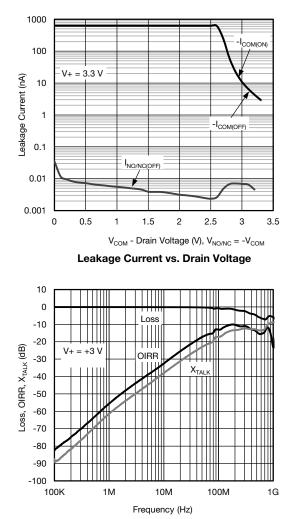


Insertion Loss, Off-Isolation Crosstalk vs. Frequency




Switching Time vs. Temperature



Switching Threshold vs. Supply Voltage



Total Harmonic Distortion and Noise vs. Frequency




5

For technical questions, contact: analogswitchtechsupport@vishay.com THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFI Downloaded From Oneyac.com




Vishay Siliconix

TYPICAL CHARACTERISTICS (T_A = 25 °C, unless otherwise noted)




Switching Time vs. Supply Voltage


TEST CIRCUITS



$$v_{OUT} = v_{COM} \left(\frac{R_L}{R_L + R_{ON}} \right)$$



Capacitance vs. Analog Voltage



Logic "1" = Switch On Logic input waveforms inverted for switches that have the opposite logic sense.



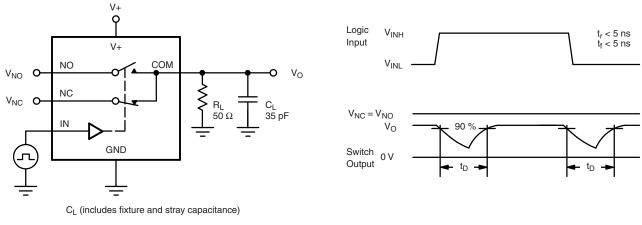


Fig. 2 - Break-Before-Make Interval

S19-0381-Rev. C, 29-Apr-2019


6


Document Number: 75683

For technical questions, contact: analogswitchtechsupport@vishay.com THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFI Downloaded From Oneyac.com



Vishay Siliconix





IN depends on switch configuration: input polarity determined by sense of switch.



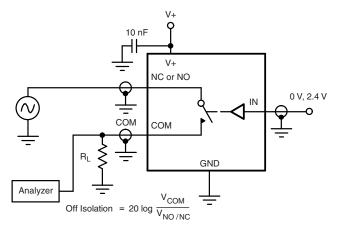


Fig. 4 - Off-Isolation





Fig. 5 - Channel Off / On Capacitance


Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package / tape drawings, part marking, and reliability data, see www.vishay.com/ppg?75683.




Vishay Siliconix

Thin miniQFN16 Case Outline





Bottom view



DIMENSIONS	MILLIMETERS ⁽¹⁾				INCHES		
DIMENSIONS	MIN.	NOM.	MAX.	MIN. NOM. MA			
А	0.50	0.55	0.60	0.020	0.022	0.024	
A1	0	-	0.05	0	-	0.002	
A3		0.15 ref.			0.006 ref.		
b	0.15	0.20	0.25	0.006	0.008	0.010	
D	2.50	2.60	2.70	0.098	0.102	0.106	
е	0.40 BSC			0.40 BSC 0.016 BSC			
E	1.70	1.80	1.90	0.067 0.071 0.07		0.075	
L	0.35	0.40	0.45	0.014	0.016	0.018	
L1	0.45	0.50	0.55	0.018	0.020	0.022	
N ⁽³⁾	16				16		
Nd ⁽³⁾	4				4		
Ne ⁽³⁾	4 4						

Notes

⁽¹⁾ Use millimeters as the primary measurement.

- ⁽²⁾ Dimensioning and tolerances conform to ASME Y14.5M. 1994.
- ⁽³⁾ N is the number of terminals. Nd and Ne is the number of terminals in each D and E site respectively.

 $^{(4)}$ Dimensions b applies to plated terminal and is measured between 0.15 mm and 0.30 mm from terminal tip.


⁽⁵⁾ The pin 1 identifier must be existed on the top surface of the package by using identification mark or other feature of package body.

⁽⁶⁾ Package warpage max. 0.05 mm.

ECN: T16-0226-Rev. B, 09-May-16 DWG: 6023



RECOMMENDED MINIMUM PADS FOR MINI QFN 16L



Mounting Footprint Dimensions in mm (inch)



Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.



单击下面可查看定价,库存,交付和生命周期等信息

>>Vishay(威世)